


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

Machine Id

PREVOST MOTOR COACH 115

Rear Diesel Engine

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

5AL) (19/2018 Oec2018 Aug/2019 Nov/2020 Oec2021 May/2022 Oec2022 Sag/2023 May/202									
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		PCA0125061	PCA0111555	PCA0101043			
Sample Date		Client Info		01 May 2024	30 Jan 2024	28 Sep 2023			
Machine Age	mls	Client Info		197438	187666	177112			
Oil Age	mls	Client Info		97720	10554	10039			
Oil Changed		Client Info		Changed	Changed	Changed			
Sample Status				NORMAL	NORMAL	NORMAL			
CONTAMINAT	ION	method	limit/base	current	history1	history2			
Fuel		WC Method	>5	<1.0	<1.0	<1.0			
Water		WC Method	>0.2	NEG	NEG	NEG			
Glycol		WC Method		NEG	NEG	NEG			
WEAR METAL	S	method	limit/base	current	history1	history2			
Iron	ppm	ASTM D5185m	>100	14	12	11			
Chromium	ppm	ASTM D5185m	>20	<1	<1	0			
Nickel	ppm	ASTM D5185m	>4	<1	0	<1			
Titanium	ppm	ASTM D5185m		<1	0	<1			
Silver	ppm	ASTM D5185m	>3	1	0	0			
Aluminum	ppm	ASTM D5185m	>20	3	2	1			
Lead	ppm	ASTM D5185m	>40	1	<1	0			
Copper	ppm	ASTM D5185m	>330	4	1	<1			
Tin	ppm	ASTM D5185m	>15	1	<1	<1			
Vanadium	ppm	ASTM D5185m		<1	0	0			
Cadmium	ppm	ASTM D5185m		<1	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m	0	6	3	<1			
Barium	ppm	ASTM D5185m	0	0	0	0			
Molybdenum	ppm	ASTM D5185m	60	62	57	55			
Manganese	ppm	ASTM D5185m	0	<1	<1	0			
Magnesium	ppm	ASTM D5185m	1010	897	932	934			
Calcium	ppm	ASTM D5185m	1070	1120	1052	1000			
Phosphorus	ppm	ASTM D5185m	1150	1047	1048	947			
Zinc	ppm	ASTM D5185m	1270	1179	1304	1197			
Sulfur	ppm	ASTM D5185m	2060	3594	3155	2764			
CONTAMINAN	ITS	method	limit/base	current	history1	history2			
Silicon	ppm	ASTM D5185m	>25	5	3	2			
Sodium	ppm	ASTM D5185m		<1	<1	1			
Potassium	ppm	ASTM D5185m	>20	6	2	2			
INFRA-RED		method	limit/base	current	history1	history2			
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2			
Nitration	Abs/cm	*ASTM D7624	>20	7.1	7.5	6.7			
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.6	17.9	17.8			
FLUID DEGRAI	NOITAC	method	limit/base	current	history1	history2			
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.6	14.3	13.7			
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.92	10.10	9.89			



OIL ANALYSIS REPORT

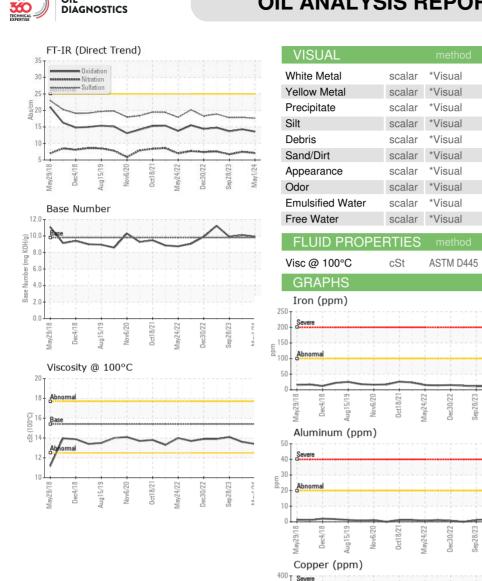

White Metal	scalar	*Visual	NONE N		NC	NONE			NONE			NONE		
Yellow Metal	scalar	*Visual	NONE		NONE			NONE			NONE			
Precipitate	scalar	*Visual	NONE		NC	NE		NONE			NONE			
Silt	scalar	*Visual	NONE		NC	NE		NONE			NONE			
Debris	scalar	*Visual	NONE		NC	NE		NONE			NONE			
Sand/Dirt	scalar	*Visual	NONE		NC	NE		NONE			NONE			
Appearance	scalar	*Visual	NORML		NC	RML		NORML			NORML			
Odor	scalar	*Visual	NORML			RML		NORML			NORML			
Emulsified Water	scalar	*Visual	>0.2		NE			NEG			NEG			
Free Water	scalar	*Visual	0.2		NE			NEG			NEG			
FLUID PROPE		method	limit/b	ase	C	currei	nt	ŀ	nistory	/1	r	nistory	/2	
Visc @ 100°C	cSt	ASTM D445	15.4 13.4			13.6			14.1					
GRAPHS														
Iron (ppm)					Lead	d (pp	m)							
250 T				100	T	, (PP								
200 - Severe				80	Severe	1			-					
150-				mdd 40										
100 - Abnormal	++++			H 40-	Abnor	mal							-	
50 -				20	+									
0 8 6 0		2 - 2	4:	0.		00	6	0:			2	22	4	
May29/18 Dec4/18 Aug15/19 Nov6/20	Oct18/21	May24/22 Dec30/22 Sep28/23	May1/24		May29/18	Dec4/18	Aug15/19	Nov6/20	Oct18/21	May24/22	Dec30/22	Sep28/23	May1/24	
≥ 4	٠ :		_						_	Ž	ā	Š	~	
Aluminum (ppm)	Cilit	Jilliu	m (pp	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,										
40 - Severe	-	-		40	Severe									
E 30 -				€ 30.										
20 Abnormal	-			E 20	Abnor	mal			-					
10+				10										
0 8 8 6 00	21	22		0.			6	- 02	21-	- 22	22	- 33	24	
May29/18 - Dec4/18 - Aug15/19 -	Oct18/21	May24/22 Dec30/22 Sep28/23	May1/24		May29/18	Dec4/18	Aug15/19	Nov6/20	0ct18/21	May24/22	Dec30/22	Sep28/23	May1/24	
Copper (ppm)		S 0 S	_			on (r	opm)			Σ		S	_	
400 T Severe				80-	Severe		piii)							
Abnormal 300				60-	II.									
200				튎40										
					Abnor	mal								
100				20	1									
0	- 12	3 2 7	124	0.		118	6	+0:	12	12	2	23	7.	
May29/18 Dec4/18 Aug15/19 Nov6/20	Oct18/21	May24/22 Dec30/22 Sep28/23	May1/2		May29/1	Dec4/1	Aug15/19	Nov6/20	0ct18/21	May24/22	Dec30/22	Sep28/23	May1/2	
viscosity @ 100°C			_				⊸ mber	_	_	Ž	ā	Ö	~	
20 T :				_12.0	Dase	e ivui	nber							
18 - Abnormal				影10.0	Base				_			_	-	
8 16 - Base				B 8.0										
Base Abnormal				Base Number (mg KOH/g) 0.09 0.09 0.09 0.09										
Abrormal				N 2.0 ⋅	1									
10 8 8 6	1 1	2 2	4	0.0			6	0		2	2		4	
May29/18 Dec4/18 Aug15/19	Oct18/21	May24/22 Dec30/22 Sep28/23	May1/24		lay29/18	Dec4/18	Aug15/19	Nov6/20	Oct18/21	May24/22	Dec30/22	Sep28/23	May1/24	
A A		Se De	2		Š		Au	_	0	Š	Ď	SS	2	





Certificate 12367

Sample No. : PCA0125061 Lab Number : 06186385 Unique Number : 11043137 Test Package : MOB 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 21 May 2024 **Tested**

: 22 May 2024 Diagnosed : 22 May 2024 - Wes Davis

BROWN BUS COMPANY - UPSTATE TRANSIT 50 VENNER ROAD AMSTERDAM, NY

US 12010 Contact: CONNIE WILBUR cwilbur@browncoach.com T: (518)843-4700

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (518)843-3600