




# OIL ANALYSIS REPORT



Area  
**(P638954)**  
 Machine Id  
**2435**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (12 GAL)**

Sample Rating Trend

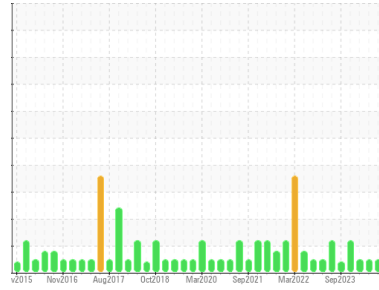

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0110364</b>	GFL0110380	GFL0096945	
Sample Date	Client Info	<b>16 May 2024</b>	15 Feb 2024	29 Jan 2024	
Machine Age	hrs	Client Info	<b>28228</b>	28020	27966
Oil Age	hrs	Client Info	<b>209662</b>	0	27966
Oil Changed	Client Info	<b>Not Changed</b>	Not Changd	Not Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>9</b>	4	2
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	1	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>9</b>	10	11
Barium	ppm ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm ASTM D5185m 60	<b>63</b>	59	57
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>901</b>	879	858
Calcium	ppm ASTM D5185m 1070	<b>1036</b>	1035	970
Phosphorus	ppm ASTM D5185m 1150	<b>997</b>	953	986
Zinc	ppm ASTM D5185m 1270	<b>1152</b>	1134	1140
Sulfur	ppm ASTM D5185m 2060	<b>3454</b>	3539	2881

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	4	3
Sodium	ppm ASTM D5185m	<b>3</b>	0	<1
Potassium	ppm ASTM D5185m >20	<b>0</b>	2	<1

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.5</b>	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>11.4</b>	7.0	6.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.8</b>	18.6	18.6


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.2</b>	14.8	14.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>5.3</b>	8.0	8.0




# OIL ANALYSIS REPORT


### FT-IR (Direct Trend)

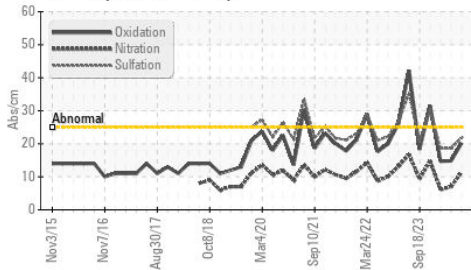

### Base Number

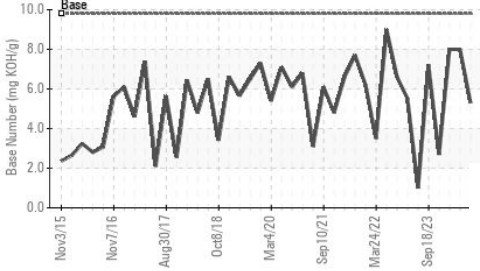

### Viscosity @ 100°C

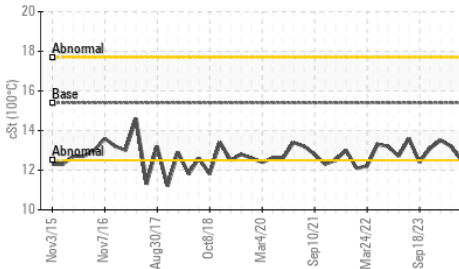

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.5	13.2

## GRAPHS


### Ferrous Alloys

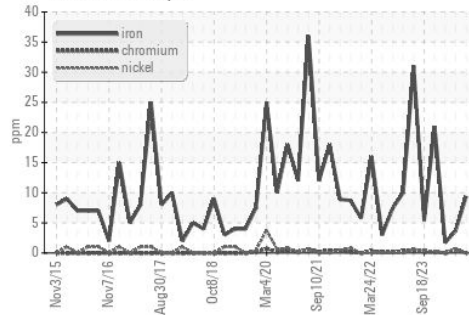


### Non-ferrous Metals

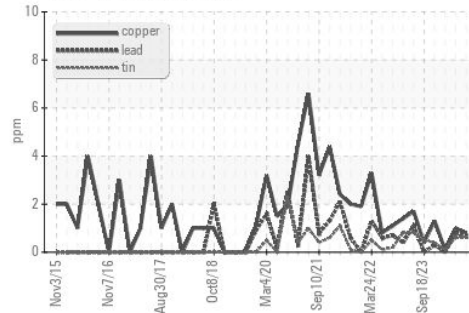

### Viscosity @ 100°C

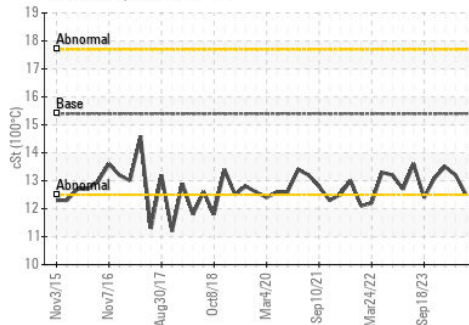

### Base Number

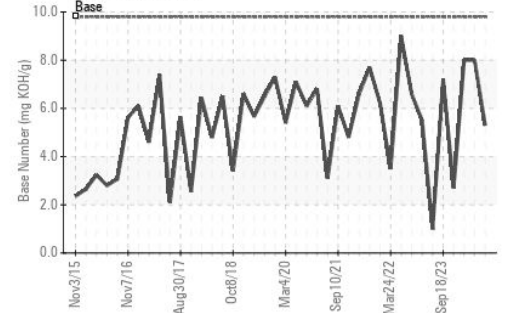

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110364  
**Lab Number** : 06187080  
**Unique Number** : 11043832  
**Test Package** : FLEET

**Received** : 21 May 2024  
**Tested** : 23 May 2024  
**Diagnosed** : 23 May 2024 - Wes Davis

**GFL Environmental - 031 - Greenville/Spartanburg**  
 1635 Antioch Church Rd  
 Piedmont, SC  
 US 29673

Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: