




# OIL ANALYSIS REPORT

Sample Rating Trend

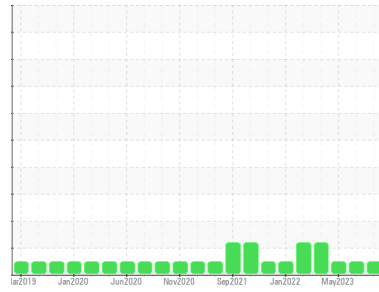

**NORMAL**



Area  
**(P658095)**  
 Machine Id  
**10897C**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110366</b>	GFL0069755	GFL0069707
Sample Date	Client Info		<b>16 May 2024</b>	11 Oct 2023	19 May 2023
Machine Age	hrs	Client Info	<b>13380</b>	12078	11390
Oil Age	hrs	Client Info	<b>1302</b>	11390	11390
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>12</b>	8	8
Chromium	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>3</b>	1	0
Lead	ppm	ASTM D5185m >30	<b>2</b>	<1	<1
Copper	ppm	ASTM D5185m >35	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>11</b>	26	16
Barium	ppm	ASTM D5185m 5	<b>0</b>	4	0
Molybdenum	ppm	ASTM D5185m 50	<b>57</b>	55	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>627</b>	572	630
Calcium	ppm	ASTM D5185m 1510	<b>1577</b>	1384	1588
Phosphorus	ppm	ASTM D5185m 780	<b>764</b>	712	783
Zinc	ppm	ASTM D5185m 870	<b>1021</b>	889	1025
Sulfur	ppm	ASTM D5185m 2040	<b>2736</b>	2217	2721

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>7</b>	9	7
Sodium	ppm	ASTM D5185m	<b>6</b>	3	6
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	2

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.5</b>	7.7	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	17.8	19.5


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.3</b>	14.7	16.1
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>4.9</b>	6.7	6.4




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

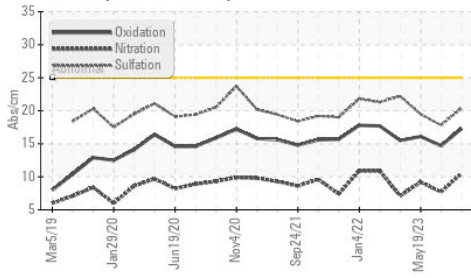

Base Number

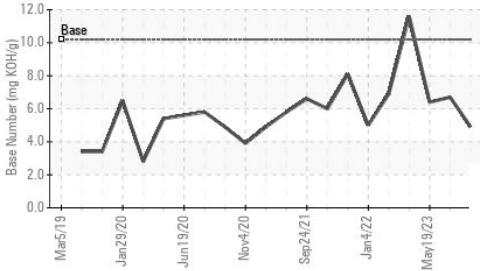

Viscosity @ 100°C

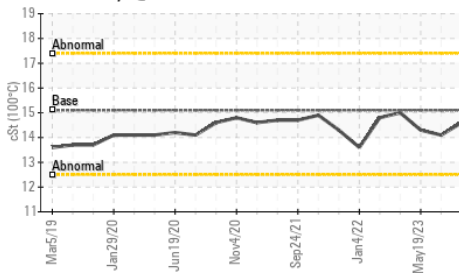


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.6	14.1

## GRAPHS


Ferrous Alloys

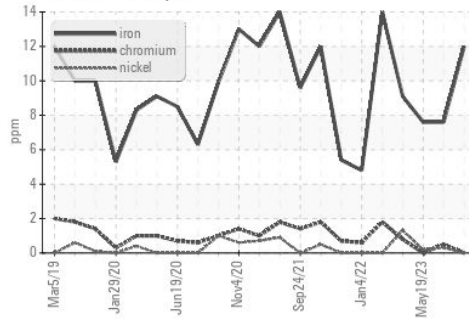


Non-ferrous Metals

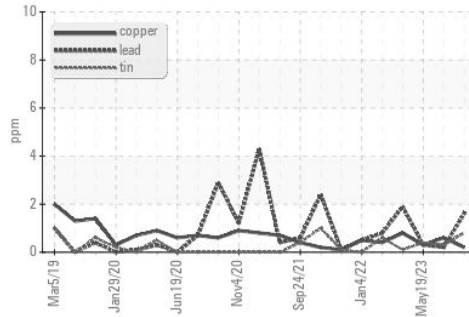

Viscosity @ 100°C

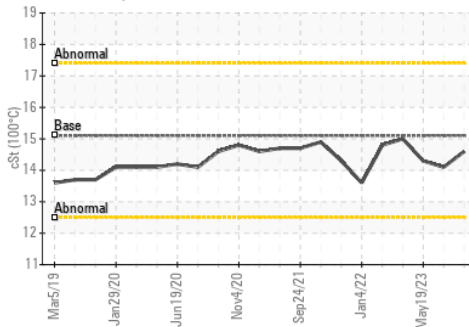

Base Number

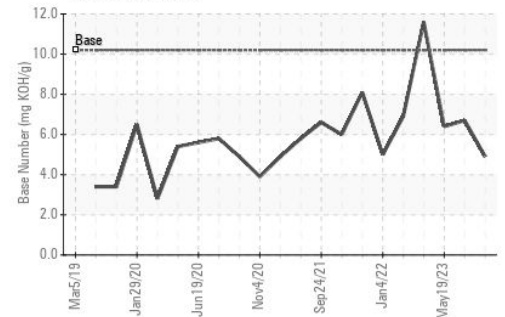

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0110366  
 Lab Number : 06187081  
 Unique Number : 11043833  
 Test Package : FLEET

Received : 21 May 2024  
 Tested : 23 May 2024  
 Diagnosed : 23 May 2024 - Wes Davis

GFL Environmental - 031 - Greenville/Spartanburg  
 1635 Antioch Church Rd  
 Piedmont, SC  
 US 29673  
 Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)