




OIL ANALYSIS REPORT

Sample Rating Trend

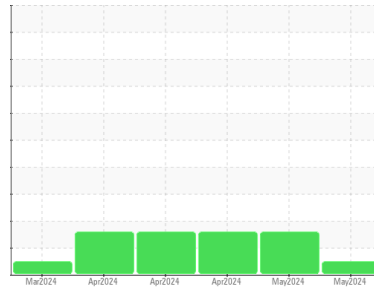

NORMAL



Machine Id
814034
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0115442	GFL0115410	GFL0115415
Sample Date	Client Info			21 May 2024	05 May 2024	22 Apr 2024
Machine Age	hrs	Client Info		674	556	515
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	6	37	39
Chromium	ppm	ASTM D5185m	>20	0	2	<1
Nickel	ppm	ASTM D5185m	>5	0	8	5
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	2	7	8
Lead	ppm	ASTM D5185m	>40	<1	2	0
Copper	ppm	ASTM D5185m	>330	28	203	180
Tin	ppm	ASTM D5185m	>15	<1	3	3
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	59	189	208
Barium	ppm	ASTM D5185m	10	0	<1	0
Molybdenum	ppm	ASTM D5185m	100	85	127	128
Manganese	ppm	ASTM D5185m		<1	4	5
Magnesium	ppm	ASTM D5185m	450	937	772	743
Calcium	ppm	ASTM D5185m	3000	1118	1556	1549
Phosphorus	ppm	ASTM D5185m	1150	1031	771	694
Zinc	ppm	ASTM D5185m	1350	1161	900	846
Sulfur	ppm	ASTM D5185m	4250	3413	2737	2525

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	10	▲ 70	▲ 77
Sodium	ppm	ASTM D5185m	>216	2	3	2
Potassium	ppm	ASTM D5185m	>20	2	7	7


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	0.1	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	5.8	9.5	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.0	23.8	24.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	21.5	23.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.4	7.9	7.6




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

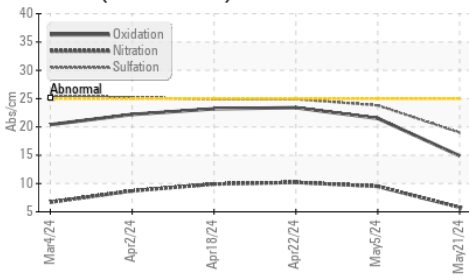

Base Number

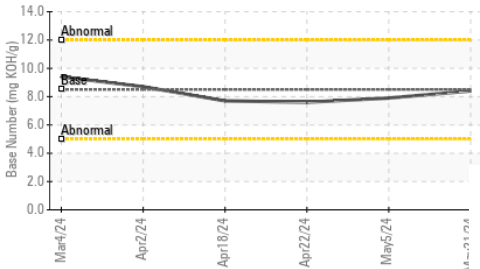

Viscosity @ 100°C

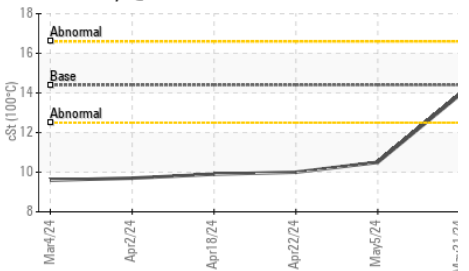


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	10.5

GRAPHS


Ferrous Alloys

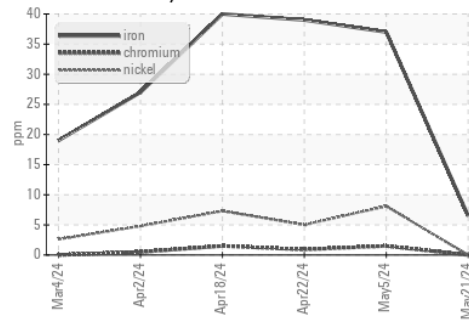


Non-ferrous Metals

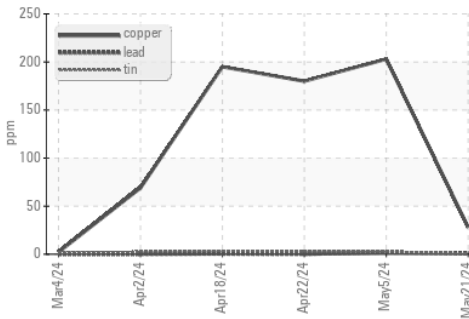

Viscosity @ 100°C

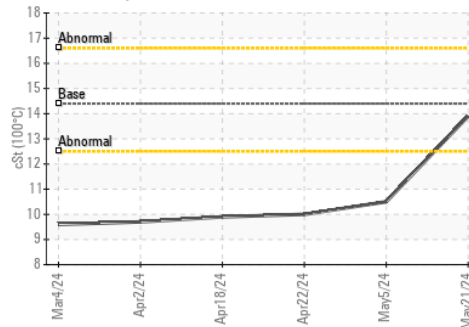

Base Number

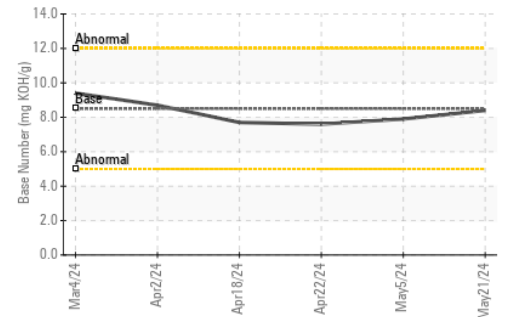

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115442
Lab Number : 06187129
Unique Number : 11043881
Test Package : FLEET

Received : 21 May 2024
Tested : 23 May 2024
Diagnosed : 23 May 2024 - Wes Davis

GFL Environmental - 816 - WCA of South Arkansas
 3083 Smackover Hwy
 El Dorado, AR
 US 71730

Contact: Mike Howell
 mike.howell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: