




# OIL ANALYSIS REPORT

Sample Rating Trend

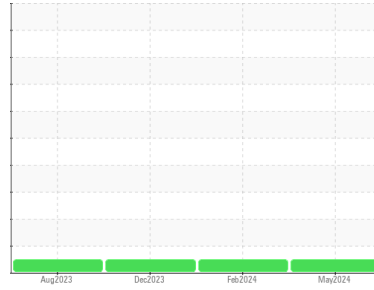

**NORMAL**



Machine Id

**725067**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0098395</b>	GFL0098403	GFL0098401
Sample Date	Client Info			<b>14 May 2024</b>	10 Feb 2024	04 Dec 2023
Machine Age	hrs	Client Info		<b>8500</b>	7916	7656
Oil Age	hrs	Client Info		<b>8500</b>	7916	7656
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>29</b>	14	45
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	3	5
Lead	ppm	ASTM D5185m	>40	<b>2</b>	<1	4
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	0	2
Tin	ppm	ASTM D5185m	>15	<b>1</b>	0	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>52</b>	71	149
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	12
Molybdenum	ppm	ASTM D5185m	60	<b>74</b>	73	101
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>994</b>	986	759
Calcium	ppm	ASTM D5185m	1070	<b>1187</b>	1229	1340
Phosphorus	ppm	ASTM D5185m	1150	<b>1099</b>	1059	861
Zinc	ppm	ASTM D5185m	1270	<b>1278</b>	1282	985
Sulfur	ppm	ASTM D5185m	2060	<b>3585</b>	3473	3103




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	6
Sodium	ppm	ASTM D5185m		<b>2</b>	1	0
Potassium	ppm	ASTM D5185m	>20	<b>37</b>	39	18

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.1</b>	0.6	1.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.2</b>	8.7	11.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.2</b>	20.9	25.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.5</b>	17.0	23.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.5</b>	9.0	9.4







# OIL ANALYSIS REPORT

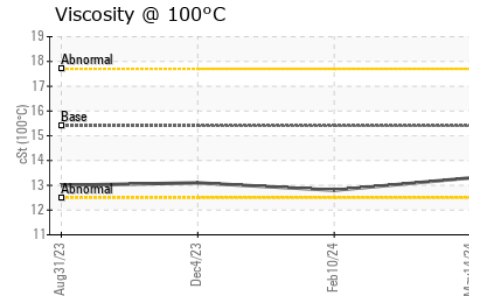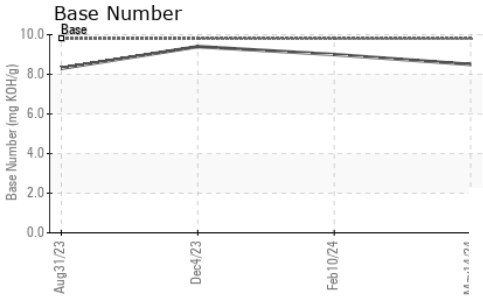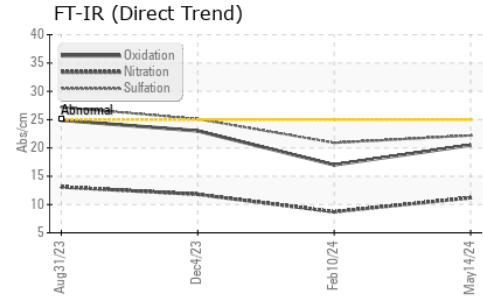

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	12.8

## GRAPHS

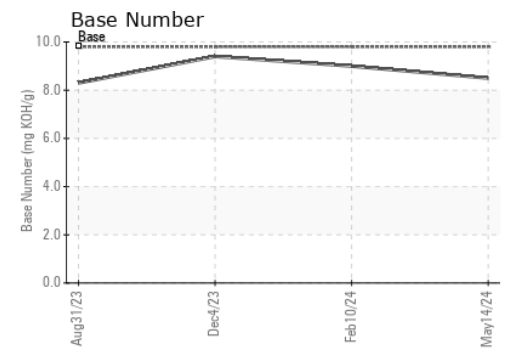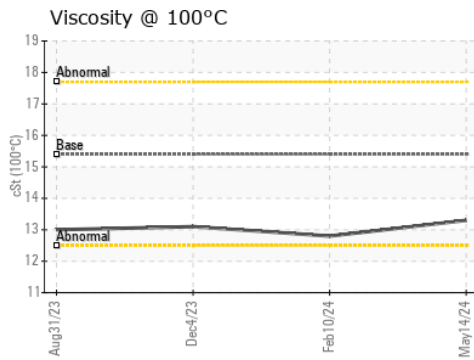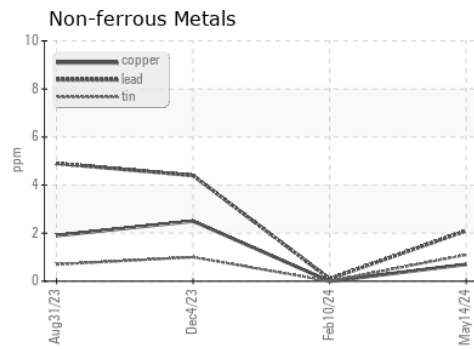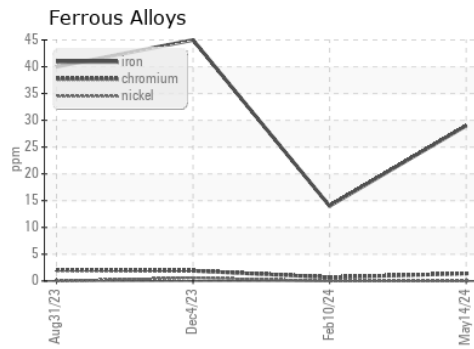

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098395      **Received** : 21 May 2024  
**Lab Number** : 06187134      **Tested** : 23 May 2024  
**Unique Number** : 11043886      **Diagnosed** : 23 May 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 409 - Wood Island LF**  
 E10081 State Hwy M28  
 Wetmore, MI  
 US 49895  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: