




OIL ANALYSIS REPORT



Machine Id
427148
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

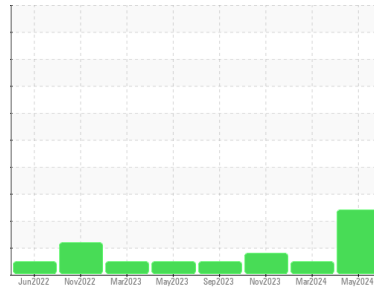

DEGRADATION



DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value. (Customer Sample Comment: Services completed)

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The BN level is low.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0116291	GFL0116267	GFL0094851
Sample Date	Client Info	17 May 2024	14 Mar 2024	06 Nov 2023
Machine Age	hrs	17925	17739	17412
Oil Age	hrs	515	329	288
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	30	17	31
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >5	0	0	0
Titanium	ppm ASTM D5185m >2	0	<1	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	1	<1	2
Lead	ppm ASTM D5185m >40	4	1	3
Copper	ppm ASTM D5185m >330	2	2	<1
Tin	ppm ASTM D5185m >15	<1	0	0
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	8	4	2
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	60	60	60
Manganese	ppm ASTM D5185m 0	<1	<1	0
Magnesium	ppm ASTM D5185m 1010	938	936	871
Calcium	ppm ASTM D5185m 1070	1083	1074	1021
Phosphorus	ppm ASTM D5185m 1150	1036	998	876
Zinc	ppm ASTM D5185m 1270	1209	1200	1143
Sulfur	ppm ASTM D5185m 2060	3300	3552	2775

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	3	2	3
Sodium	ppm ASTM D5185m	<1	1	0
Potassium	ppm ASTM D5185m >20	0	<1	3
Fuel	% ASTM D3524 >3.0	<1.0	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	▲ 5.8	3	▲ 4
Nitration	Abs/cm *ASTM D7624 >20	12.0	7.7	9.0
Sulfation	Abs/.1mm *ASTM D7415 >30	28.3	22.5	24.3


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.8	13.3	13.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ 0.0	7.9	5.9




OIL ANALYSIS REPORT


▲ FT-IR (Direct Trend)

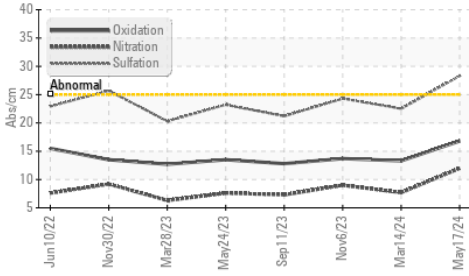


▲ Soot %

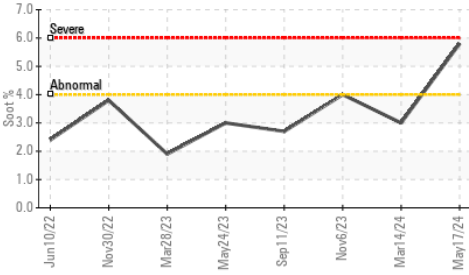

▲ Viscosity @ 100°C

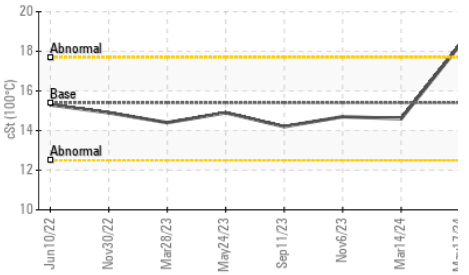

▲ Soot %

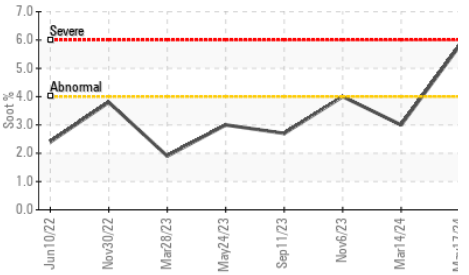

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 18.3	14.6	14.7

GRAPHS


Ferrous Alloys

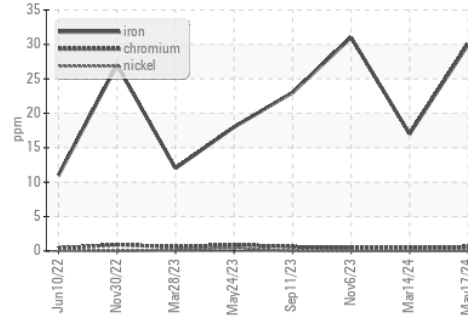


Non-ferrous Metals

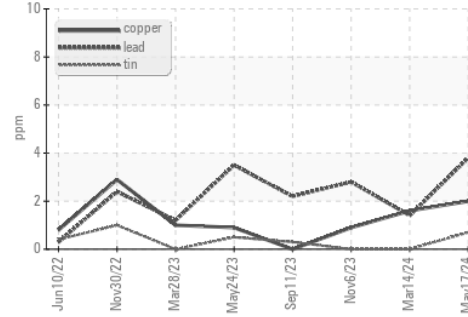

▲ Viscosity @ 100°C

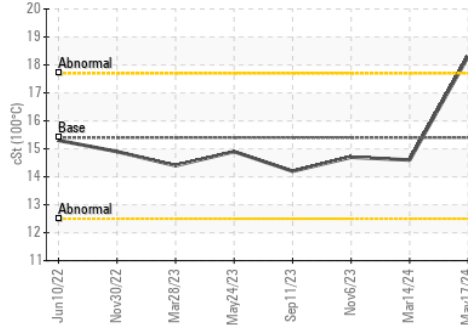

▲ Base Number

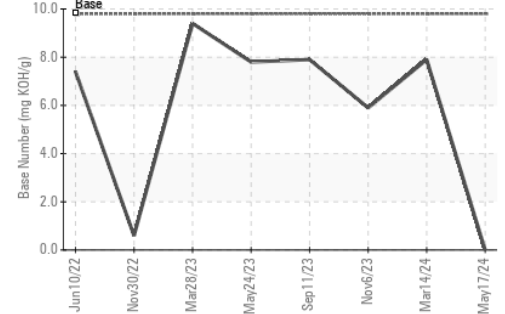

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0116291

Lab Number : 06187143

Unique Number : 11043895

Test Package : FLEET (Additional Tests : FuelDilution)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 21 May 2024

Tested : 24 May 2024

Diagnosed : 24 May 2024 - Jonathan Hester

GFL Environmental - 455 - Flint

2051 W. Bristol Rd

Flint Township, MI

US 48507

Contact: MARK WOMBLE

mwomble@gflenv.com

T: (586)825-9514

F: