




# OIL ANALYSIS REPORT

Sample Rating Trend

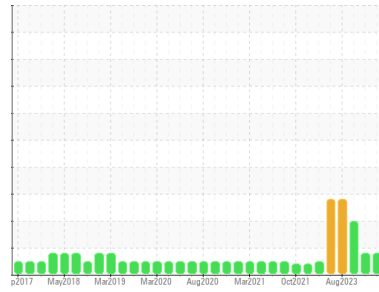

FUEL



Machine Id  
**10800**  
 Component  
**Diesel Engine**  
 Fluid

**PETRO CANADA DURON SHP 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0072150</b>	GFL0072124	GFL0072048
Sample Date	Client Info	<b>20 May 2024</b>	19 Apr 2024	05 Dec 2023
Machine Age	hrs	<b>17865</b>	17627	17044
Oil Age	hrs	<b>208</b>	453	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>MARGINAL</b>	ABNORMAL	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>21</b>	12	6
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>10</b>	6	4
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>4</b>	4	26
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	60	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>911</b>	876	592
Calcium	ppm	ASTM D5185m 1070	<b>1033</b>	1001	827
Phosphorus	ppm	ASTM D5185m 1150	<b>989</b>	986	604
Zinc	ppm	ASTM D5185m 1270	<b>1201</b>	1147	755
Sulfur	ppm	ASTM D5185m 2060	<b>3210</b>	3221	2146

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>5</b>	5	6
Sodium	ppm	ASTM D5185m	<b>5</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>19</b>	12	12
Fuel	%	ASTM D3524 >5	<b>▲ 3.5</b>	▲ 6.1	▲ 11.1

## INFRA-RED





method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.1</b>	8.0	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.5</b>	19.0	19.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	15.1	18.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.8</b>	8.3	8.0







# OIL ANALYSIS REPORT

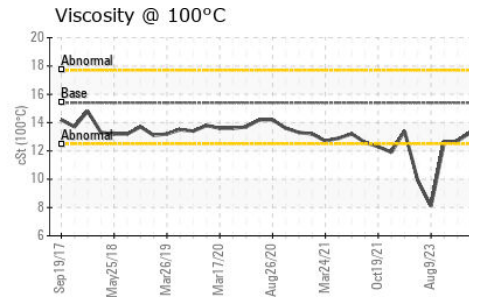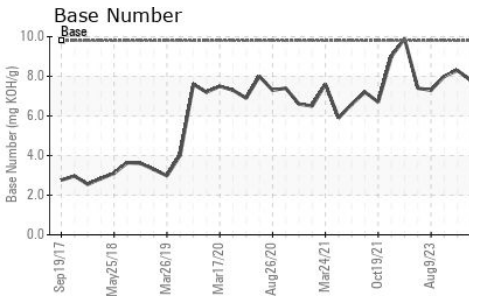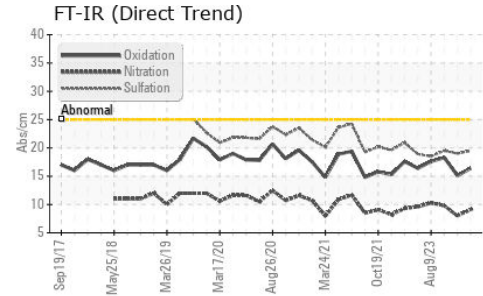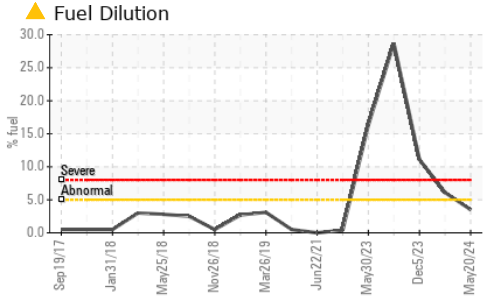

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	12.7

## GRAPHS

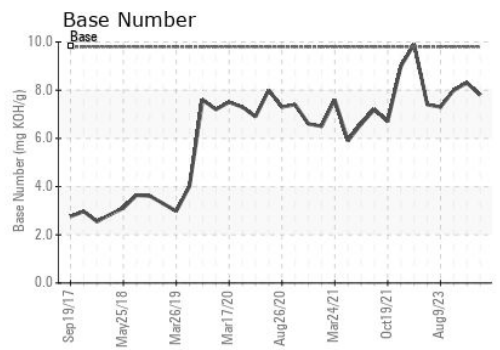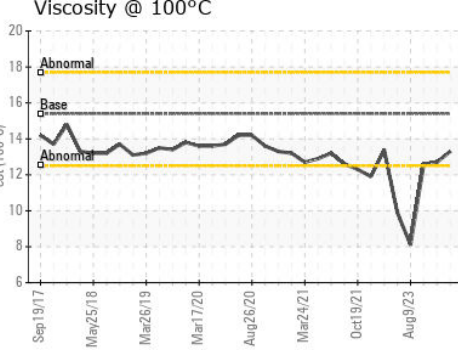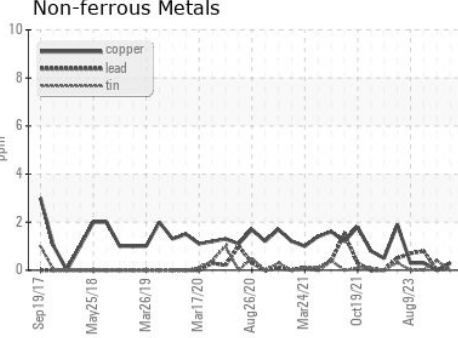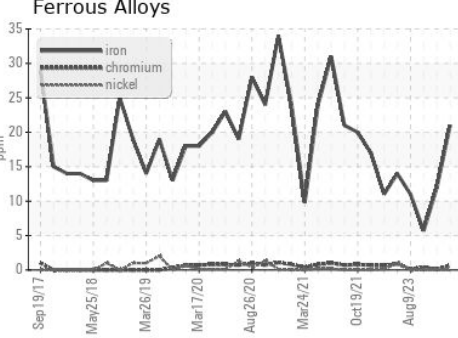

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0072150      **Received** : 22 May 2024  
**Lab Number** : 06187274      **Tested** : 28 May 2024  
**Unique Number** : 11044026      **Diagnosed** : 28 May 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 094 - Cedartown**  
 2097 Buchanan Highway  
 Cedartown, GA  
 US 30125  
 Contact: WILLIAM FOSTER  
 william.foster@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)