




# OIL ANALYSIS REPORT



Machine Id  
**834037**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (21 QTS)**

### Sample Rating Trend

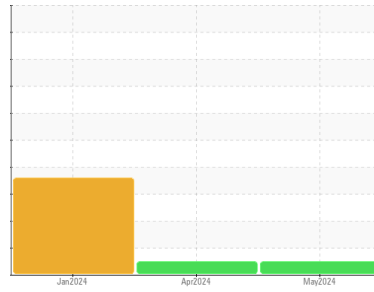

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122652</b>	GFL0114539	GFL0074619
Sample Date	Client Info		<b>20 May 2024</b>	18 Apr 2024	12 Jan 2024
Machine Age	hrs	Client Info	<b>1907</b>	1735	1194
Oil Age	hrs	Client Info	<b>713</b>	0	1194
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>25</b>	27	▲ 51
Chromium	ppm	ASTM D5185m >5	<b>1</b>	<1	2
Nickel	ppm	ASTM D5185m >4	<b>1</b>	0	2
Titanium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>4</b>	3	5
Lead	ppm	ASTM D5185m >40	<b>2</b>	1	3
Copper	ppm	ASTM D5185m >150	<b>3</b>	3	15
Tin	ppm	ASTM D5185m >4	<b>1</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	0	1
Barium	ppm	ASTM D5185m 0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>70</b>	72	64
Manganese	ppm	ASTM D5185m 0	<b>2</b>	2	13
Magnesium	ppm	ASTM D5185m 1010	<b>947</b>	976	911
Calcium	ppm	ASTM D5185m 1070	<b>1169</b>	1227	1289
Phosphorus	ppm	ASTM D5185m 1150	<b>1124</b>	980	850
Zinc	ppm	ASTM D5185m 1270	<b>1307</b>	1227	1040
Sulfur	ppm	ASTM D5185m 2060	<b>3197</b>	3218	2157

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	7	▲ 26
Sodium	ppm	ASTM D5185m	<b>4</b>	5	7
Potassium	ppm	ASTM D5185m >20	<b>8</b>	3	8

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	9.6	13.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.7</b>	20.3	26.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	14.9	25.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>5.0</b>	4.1	▲ 2.6







# OIL ANALYSIS REPORT

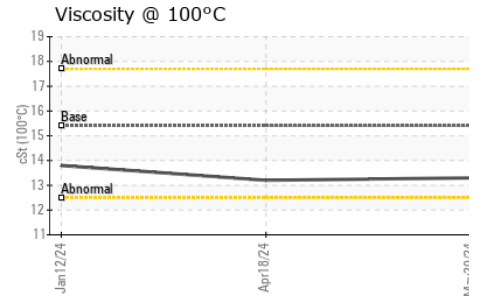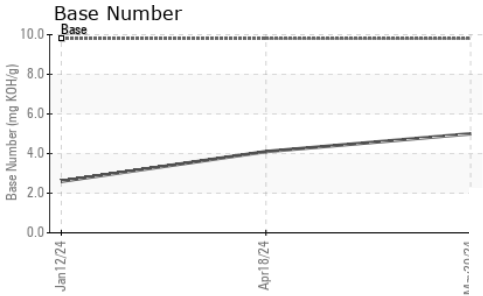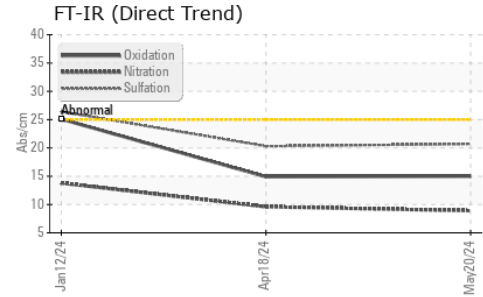

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.2	13.8

## GRAPHS

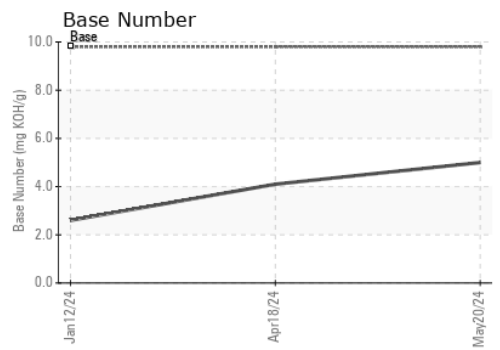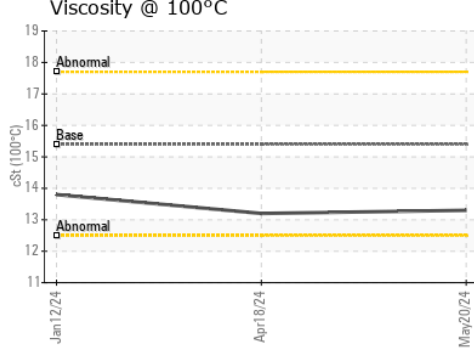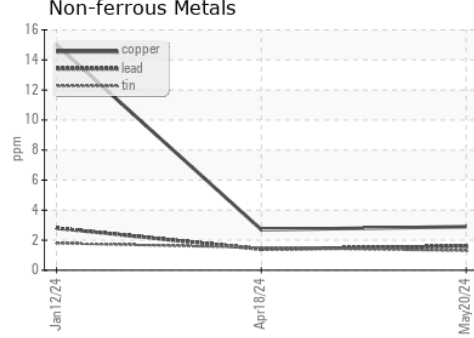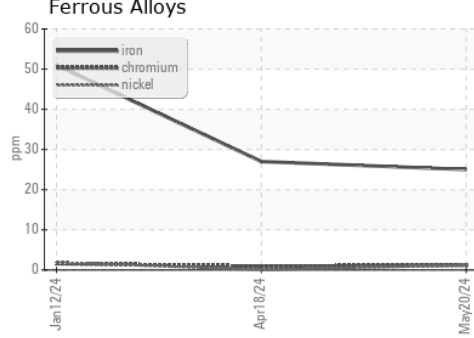

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122652      **Received** : 22 May 2024  
**Lab Number** : **06187400**      **Tested** : 31 May 2024  
**Unique Number** : 11044152      **Diagnosed** : 31 May 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 095 - Atlanta West**  
 2699 Cochran Industrial Blvd  
 Douglasville, GA  
 US 30127-1332  
 Contact: Darrell Welch  
 darrell.welch@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)