




# OIL ANALYSIS REPORT

Sample Rating Trend

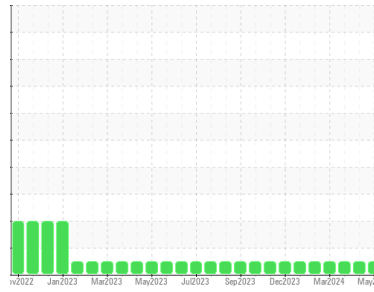

**NORMAL**



Area  
**{UNASSIGNED}**

Machine Id  
**913025**

Component  
**Front Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0098934</b>	GFL0098911	GFL0099017	
Sample Date	Client Info	<b>09 May 2024</b>	26 Apr 2024	09 Apr 2024	
Machine Age	hrs	Client Info	<b>4207</b>	4101	3940
Oil Age	hrs	Client Info	<b>4207</b>	2571	2410
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>20</b>	16	5
Chromium	ppm ASTM D5185m >20	<b>0</b>	0	<1
Nickel	ppm ASTM D5185m >5	<b>1</b>	2	1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	2	1
Lead	ppm ASTM D5185m >40	<b>0</b>	0	1
Copper	ppm ASTM D5185m >330	<b>1</b>	0	1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>58</b>	54	56
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	1
Magnesium	ppm ASTM D5185m 1010	<b>904</b>	853	864
Calcium	ppm ASTM D5185m 1070	<b>1154</b>	982	1061
Phosphorus	ppm ASTM D5185m 1150	<b>1005</b>	943	1091
Zinc	ppm ASTM D5185m 1270	<b>1220</b>	1121	1153
Sulfur	ppm ASTM D5185m 2060	<b>3092</b>	3100	3566

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	4	4
Sodium	ppm ASTM D5185m	<b>1</b>	<1	14
Potassium	ppm ASTM D5185m >20	<b>3</b>	5	16

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.6</b>	0.5	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>8.8</b>	8.1	4.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.3</b>	19.0	17.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.1</b>	14.5	12.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.1</b>	7.2	8.3







# OIL ANALYSIS REPORT

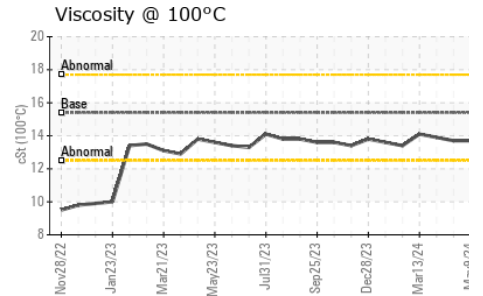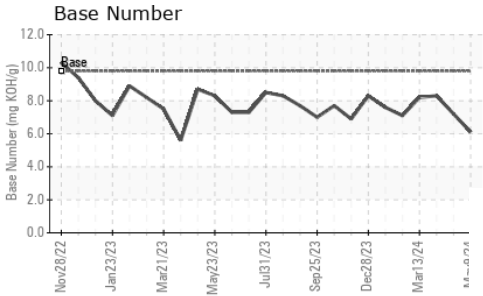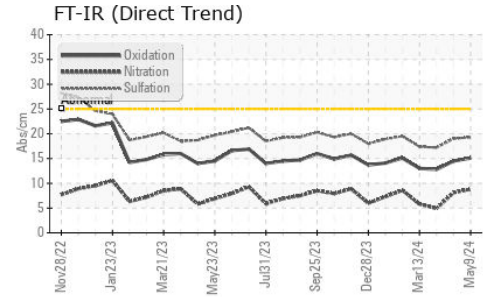

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.9

## GRAPHS

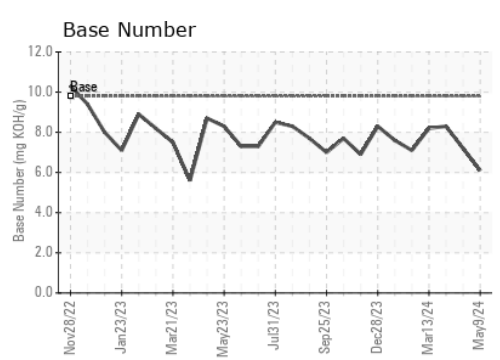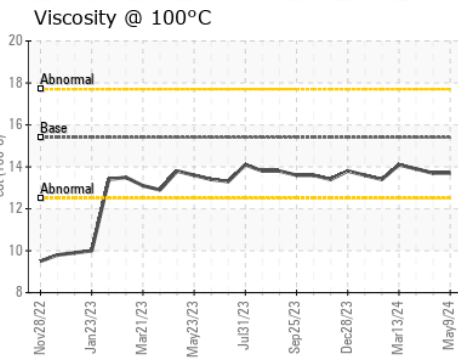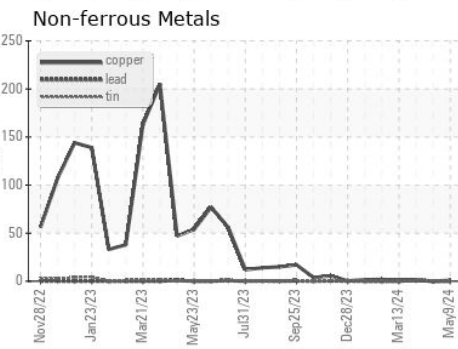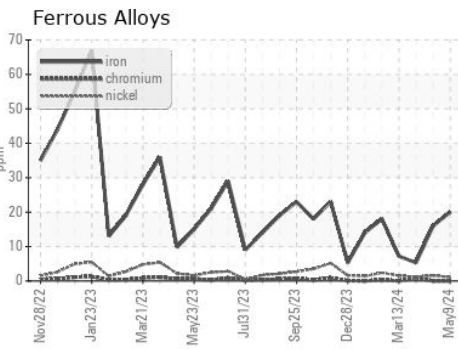

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098934      **Received** : 22 May 2024  
**Lab Number** : 06187476      **Tested** : 23 May 2024  
**Unique Number** : 11044228      **Diagnosed** : 23 May 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 084 - Clarksville**  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042  
 Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com  
 T: (931)552-7276  
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)