




# OIL ANALYSIS REPORT

Sample Rating Trend

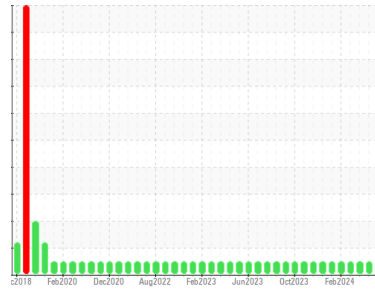

**NORMAL**



Machine Id  
**2729**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0098897</b>	GFL0098890	GFL0099023
Sample Date	Client Info		<b>07 May 2024</b>	16 Apr 2024	25 Mar 2024
Machine Age	mls	Client Info	<b>328555</b>	326005	319690
Oil Age	mls	Client Info	<b>328555</b>	326005	316767
Oil Changed	Client Info		<b>Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>18</b>	15	29
Chromium	ppm	ASTM D5185m >5	<b>0</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2
Lead	ppm	ASTM D5185m >150	<b>&lt;1</b>	2	<1
Copper	ppm	ASTM D5185m >90	<b>0</b>	5	<1
Tin	ppm	ASTM D5185m >5	<b>0</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	6	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	63	63
Manganese	ppm	ASTM D5185m 0	<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>928</b>	878	1020
Calcium	ppm	ASTM D5185m 1070	<b>1332</b>	1227	1257
Phosphorus	ppm	ASTM D5185m 1150	<b>1066</b>	1000	1113
Zinc	ppm	ASTM D5185m 1270	<b>1300</b>	1233	1380
Sulfur	ppm	ASTM D5185m 2060	<b>3373</b>	3328	3836

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>4</b>	6	6
Sodium	ppm	ASTM D5185m	<b>5</b>	3	42
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	4	36

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.4</b>	0.3	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	8.8	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.8</b>	19.8	22.0


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.8</b>	16.4	19.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.8</b>	7.3	7.5




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

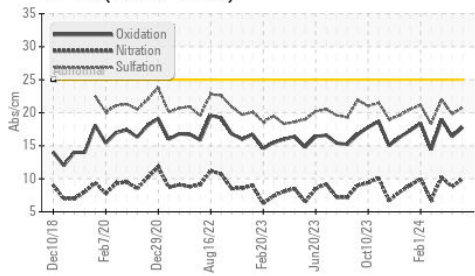

Base Number

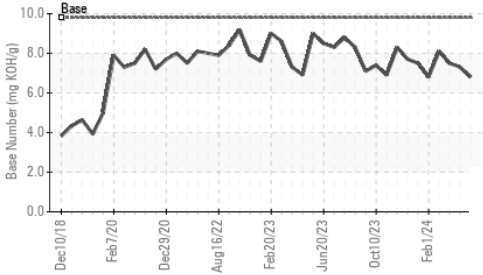

Viscosity @ 100°C

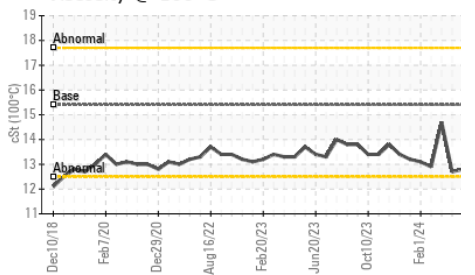


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	12.7

## GRAPHS


Ferrous Alloys

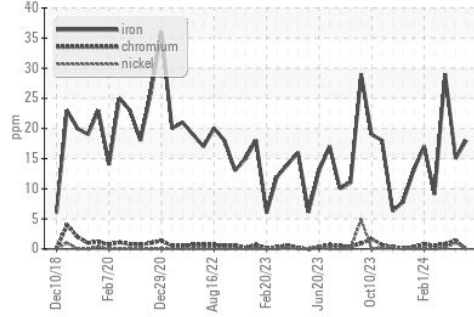


Non-ferrous Metals

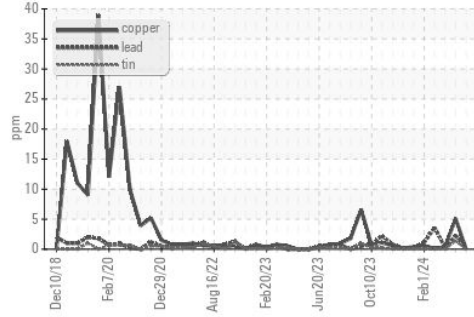

Viscosity @ 100°C

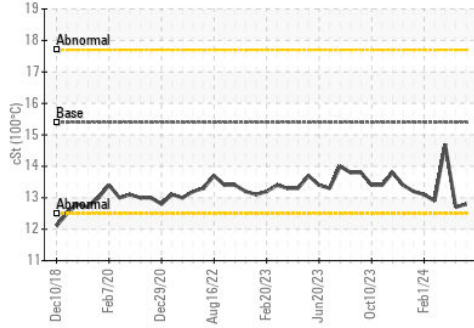

Base Number

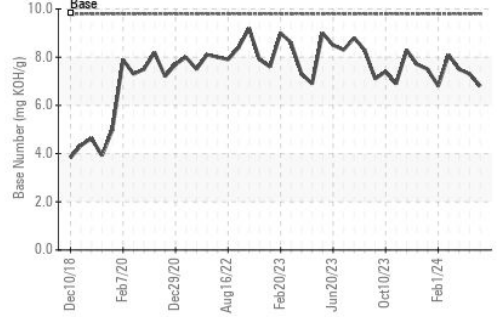

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098897  
**Lab Number** : 06187477  
**Unique Number** : 11044229  
**Test Package** : FLEET  
**Received** : 22 May 2024  
**Tested** : 23 May 2024  
**Diagnosed** : 23 May 2024 - Wes Davis

**GFL Environmental - 084 - Clarksville**  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042  
 Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com  
 T: (931)552-7276  
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)