

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Machine Id

1924254

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)
DIAGNOSIS
Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
--------	------------	---------	----------	----------

Sample Number	Client Info	PCA0119272	---	---
Sample Date	Client Info	01 Apr 2024	---	---
Machine Age	mls	Client Info	170450	---
Oil Age	mls	Client Info	170450	---
Oil Changed	Client Info	Changed	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
--------	------------	---------	----------	----------

Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
--------	------------	---------	----------	----------

Iron	ppm	ASTM D5185m	>100	26	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	8	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	1	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
--------	------------	---------	----------	----------

Boron	ppm	ASTM D5185m	2	0	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	50	70	---	---
Manganese	ppm	ASTM D5185m	0	<1	---	---
Magnesium	ppm	ASTM D5185m	950	887	---	---
Calcium	ppm	ASTM D5185m	1050	1130	---	---
Phosphorus	ppm	ASTM D5185m	995	972	---	---
Zinc	ppm	ASTM D5185m	1180	1179	---	---
Sulfur	ppm	ASTM D5185m	2600	3280	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
--------	------------	---------	----------	----------

Silicon	ppm	ASTM D5185m	>25	6	---	---
Sodium	ppm	ASTM D5185m		1	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---

INFRA-RED

method	limit/base	current	history1	history2
--------	------------	---------	----------	----------




Soot %	%	*ASTM D7844	>3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.0	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
--------	------------	---------	----------	----------

Oxidation	Abs/.1mm	*ASTM D7414	>25	17.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.9	---	---









OIL ANALYSIS REPORT

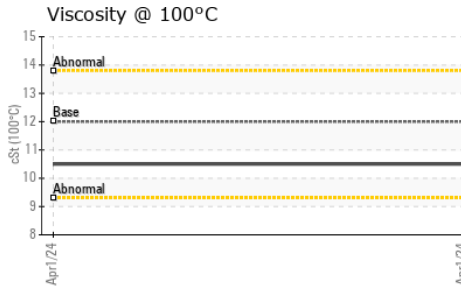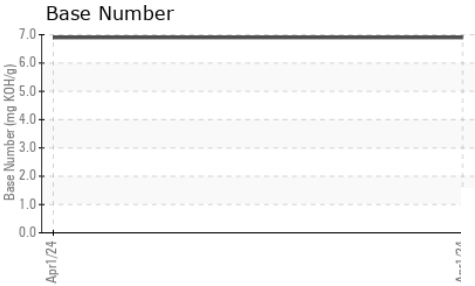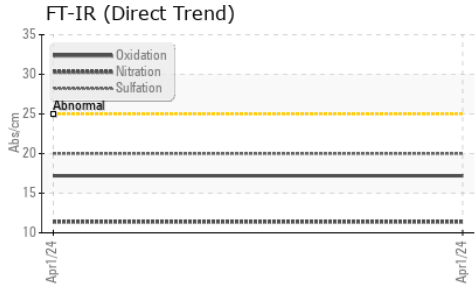

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.5	---

GRAPHS

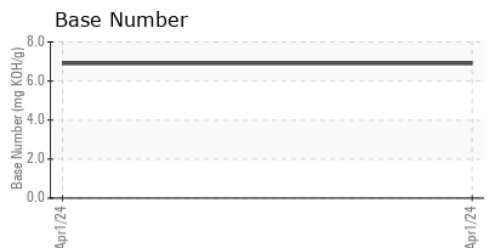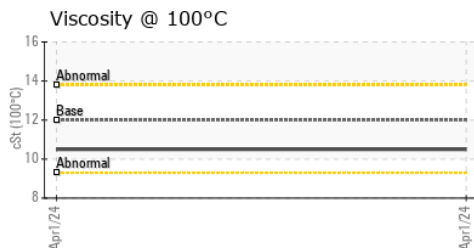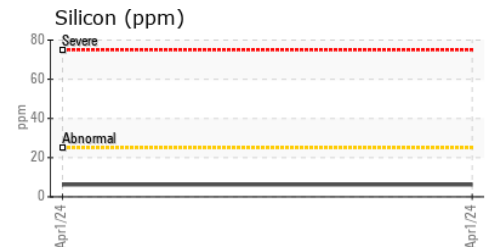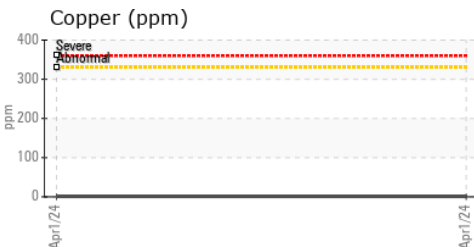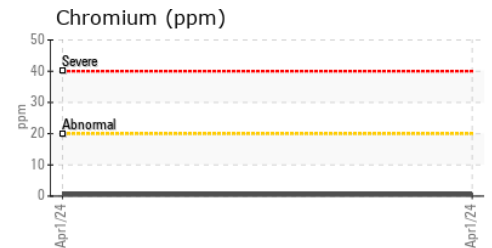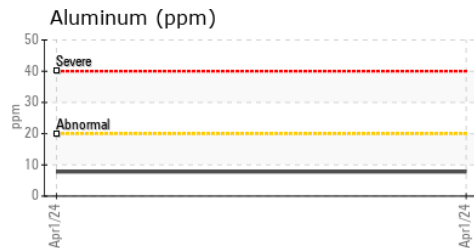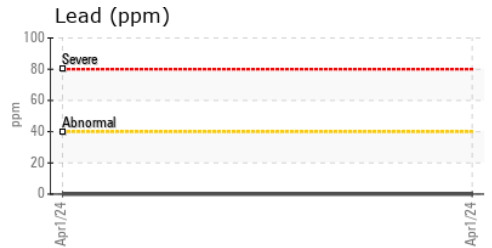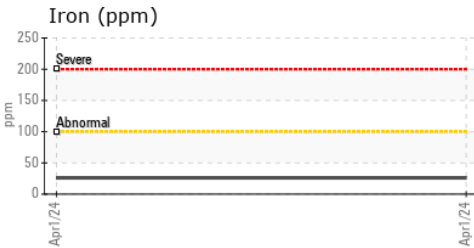

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119272 **Received** : 22 May 2024
Lab Number : **06188348** **Tested** : 24 May 2024
Unique Number : 11045100 **Diagnosed** : 24 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #128
 529 CEDAR LN
 FLORENCE, NJ
 US 08518
 Contact: PETER SHEPARD
 pshepard@millertransgroup.com
 T: (609)499-3601
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)