




# OIL ANALYSIS REPORT

Sample Rating Trend

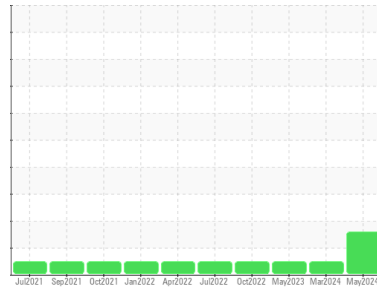

Machine Id  
**828061**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elemental level of silicon (Si) above normal.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113933</b>	GFL0113918	GFL0079050
Sample Date	Client Info		<b>20 May 2024</b>	27 Mar 2024	26 May 2023
Machine Age	hrs	Client Info	<b>9974</b>	9683	0
Oil Age	hrs	Client Info	<b>9683</b>	9683	0
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>12</b>	19	25
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	14
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>16</b>	8	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	60	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	1
Magnesium	ppm	ASTM D5185m 1010	<b>834</b>	943	963
Calcium	ppm	ASTM D5185m 1070	<b>1085</b>	1115	1071
Phosphorus	ppm	ASTM D5185m 1150	<b>958</b>	1017	961
Zinc	ppm	ASTM D5185m 1270	<b>1218</b>	1237	1264
Sulfur	ppm	ASTM D5185m 2060	<b>3311</b>	3565	3137

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>▲ 52</b>	4	6
Sodium	ppm	ASTM D5185m	<b>6</b>	3	8
Potassium	ppm	ASTM D5185m >20	<b>7</b>	1	4

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.7</b>	1.2	1.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.9</b>	9.7	10.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	19.3	22.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.9</b>	14.5	16.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.7</b>	6.1	6.1




# OIL ANALYSIS REPORT


▲ Silicon (ppm)

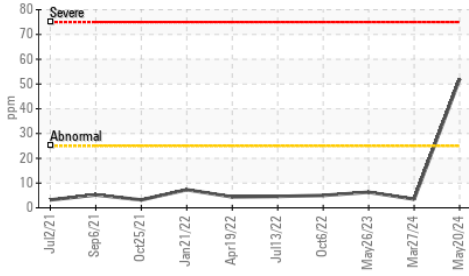


FT-IR (Direct Trend)

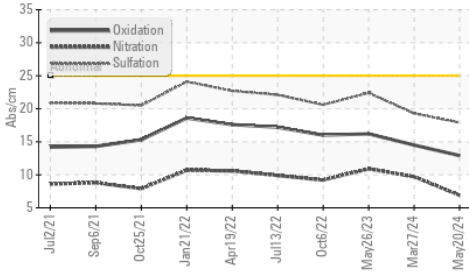

Base Number

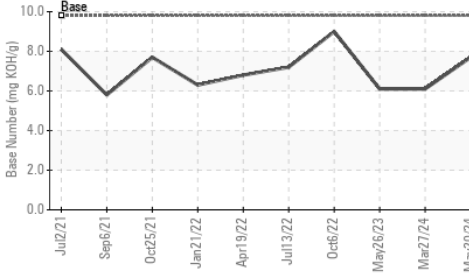

Viscosity @ 100°C

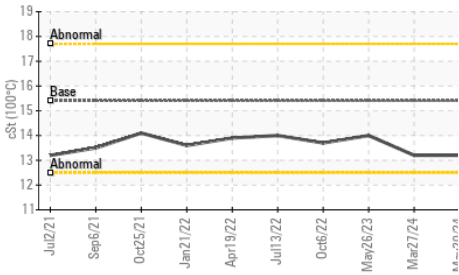

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	14.0

## GRAPHS


Ferrous Alloys

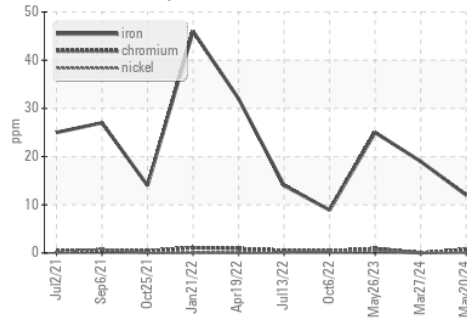


Non-ferrous Metals

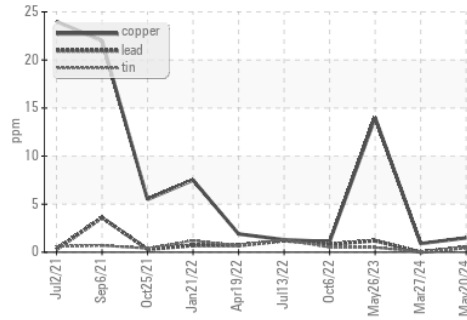

Viscosity @ 100°C

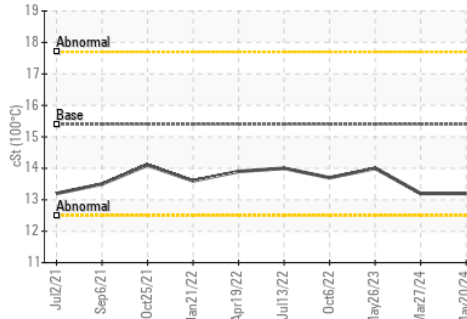

Base Number

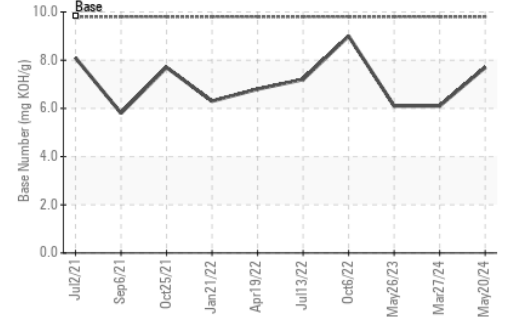

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0113933

Lab Number : 06188548

Unique Number : 11045300

Test Package : FLEET

Received : 22 May 2024

Tested : 24 May 2024

Diagnosed : 28 May 2024 - Don Baldrige

GFL Environmental - 029 - Wytheville

2390 North 4th Street

Wytheville, VA

US 24382

Contact: CHARLES CORVIN

charles.corvin@gflenv.com; canastasio@wearcheckusa.com

T: (276)223-4476

F: (276)223-1283

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)