




PROBLEM SUMMARY

Sample Rating Trend

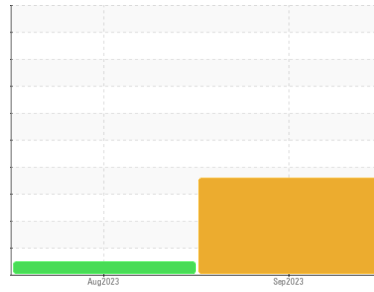

SOOT



Machine Id

FREIGHTLINER 68



Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (13 LTR)

COMPONENT CONDITION SUMMARY

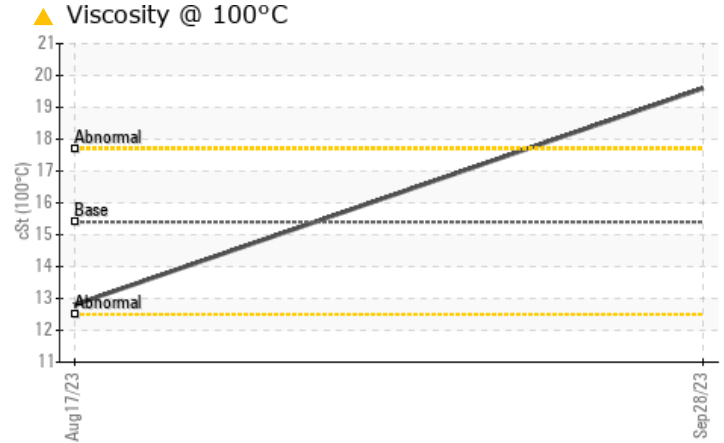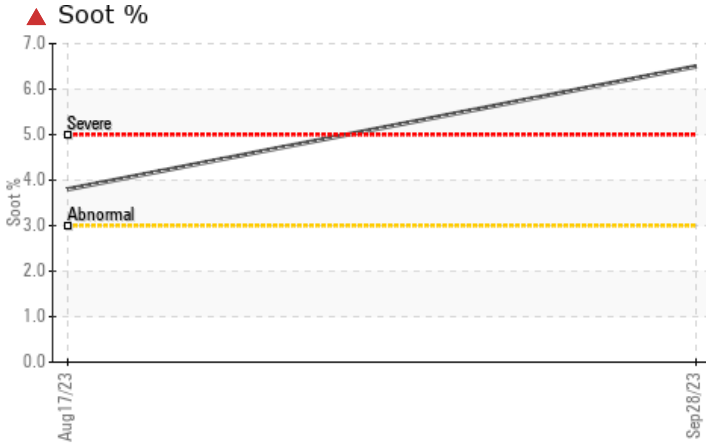

RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Soot %	%	*ASTM D7844	>3	▲ 6.5	▲ 3.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	▲ 0.0	5.3	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 19.6	12.8	---

Customer Id: ATRPIN
Sample No.: PCA0102599
Lab Number: 06188601
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Combustion	---	---	?	We advise that you check for faulty combustion, plugged air filters, or aftercoolers.

HISTORICAL DIAGNOSIS

17 Aug 2023 Diag:

UNKNOWN




view report



OIL ANALYSIS REPORT

Sample Rating Trend

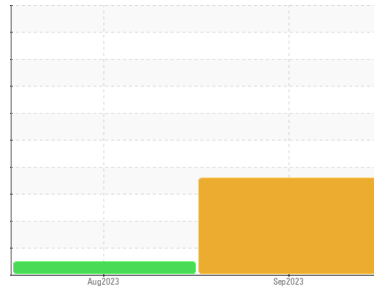

SOOT



Machine Id
FREIGHTLINER 68
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (13 LTR)

DIAGNOSIS

▲ Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

▲ Contamination

There is an abnormal amount of solids and carbon present in the oil.

▲ Fluid Condition

The oil viscosity is higher than normal. The BN level is low.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0102599	PCA0102587	---
Sample Date	Client Info		28 Sep 2023	17 Aug 2023	---
Machine Age	mls	Client Info	530339	530339	---
Oil Age	mls	Client Info	25443	25443	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	45	42	---
Chromium	ppm	ASTM D5185m >5	3	2	---
Nickel	ppm	ASTM D5185m >2	<1	<1	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m >3	<1	<1	---
Aluminum	ppm	ASTM D5185m >30	1	5	---
Lead	ppm	ASTM D5185m >30	16	10	---
Copper	ppm	ASTM D5185m >150	2	3	---
Tin	ppm	ASTM D5185m >5	1	1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<1	6	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 60	55	67	---
Manganese	ppm	ASTM D5185m 0	<1	<1	---
Magnesium	ppm	ASTM D5185m 1010	831	792	---
Calcium	ppm	ASTM D5185m 1070	1039	1163	---
Phosphorus	ppm	ASTM D5185m 1150	840	829	---
Zinc	ppm	ASTM D5185m 1270	1118	1105	---
Sulfur	ppm	ASTM D5185m 2060	2891	2761	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	6	8	---
Sodium	ppm	ASTM D5185m	0	● 126	---
Potassium	ppm	ASTM D5185m >20	4	▲ 126	---
Fuel	%	ASTM D3524 >5	<1.0	<1.0	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	▲ 6.5	▲ 3.8	---
Nitration	Abs/cm	*ASTM D7624 >20	16.0	11.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	35.5	27.4	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	25.9	19.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	▲ 0.0	5.3	---

OIL ANALYSIS REPORT


▲ FT-IR (Direct Trend)

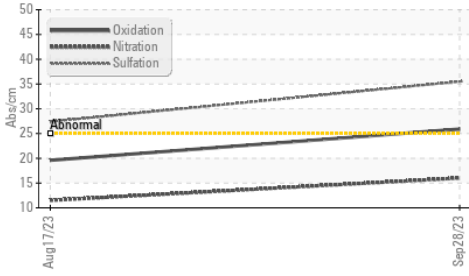


▲ Soot %

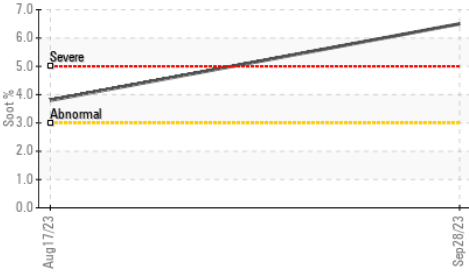

▲ Base Number

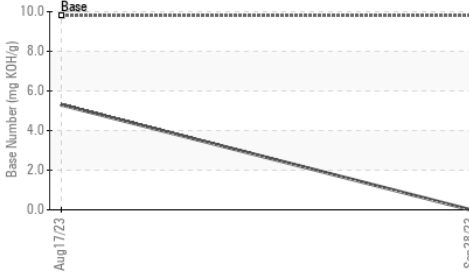





▲ Viscosity @ 100°C

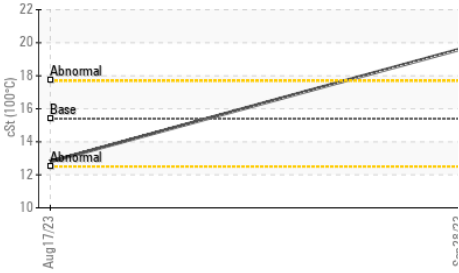

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 19.6	12.8	---

GRAPHS

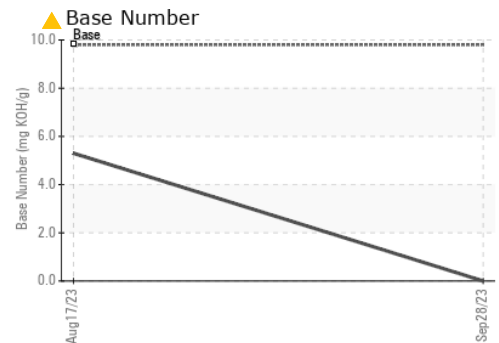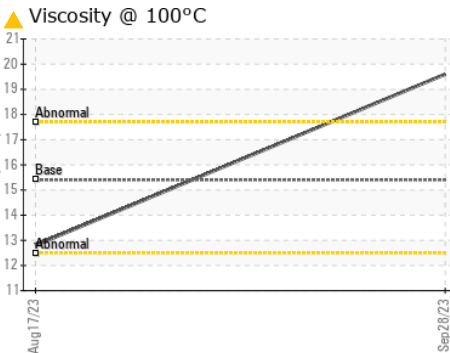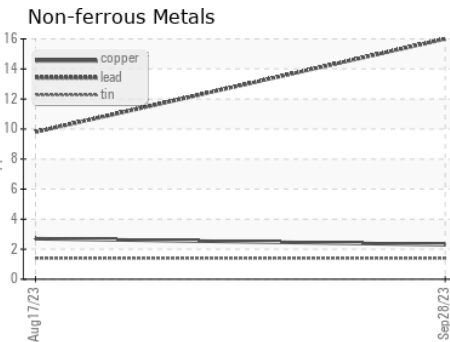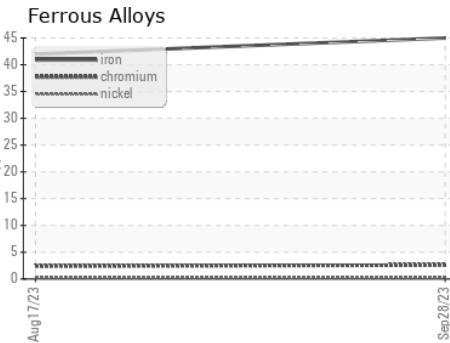

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0102599 **Received** : 23 May 2024
Lab Number : 06188601 **Tested** : 24 May 2024
Unique Number : 11045353 **Diagnosed** : 28 May 2024 - Don Baldrige
Test Package : FLEET (Additional Tests : FuelDilution)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

A Truck Repair
 9349 China Grove Church Road
 Pineville, NC
 US 28134
 Contact: Vlad Melnichuk
 shop@migway.com
 T: (980)255-3200
 F: