

## **OIL ANALYSIS REPORT**

Sample Rating Trend **WEAR** 

Machine Id

# **FREIGHTLINER 227**

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (--- G

## DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Cylinder, crank, or cam shaft wear is indicated.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

iAL)				Sep2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number	Will Client	Client Info	minu bass	PCA0102596		
Sample Date		Client Info		28 Sep 2023		
Machine Age	mls	Client Info		96855		
Oil Age	mls	Client Info		49332		
Oil Changed	11115	Client Info		Changed		
Sample Status		Ciletit IIIIO		ABNORMAL		
· ·	101					
CONTAMINAT	ION	method	limit/base	current	history1	history2
-uel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>80	<u> </u>		
Chromium	ppm	ASTM D5185m	>5	<u> </u>		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>30	21		
_ead	ppm	ASTM D5185m	>30	<1		
Copper	ppm	ASTM D5185m	>150	87		
Γin	ppm	ASTM D5185m	>5	2		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	4		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	74		
Manganese	ppm	ASTM D5185m	0	2		
Magnesium	ppm	ASTM D5185m	950	987		
Calcium	ppm	ASTM D5185m	1050	1468		
Phosphorus	ppm	ASTM D5185m	995	1047		
Zinc	ppm	ASTM D5185m	1180	1420		
Sulfur	ppm	ASTM D5185m		2577		
CONTAMINAN		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	10		
Sodium	ppm	ASTM D5185m	>20	1		
Potassium	ppm	ASTM D5185m	>20	55		
INFRA-RED		method	limit/base	current	history1	history2
	0/				,	
Soot %	% Abolom	*ASTM D7844	>3	1.6		
Nitration Sulfation	Abs/cm Abs/.1mm	*ASTM D7624 *ASTM D7415	>20	18.8 30.7		
FLUID DEGRAI			limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	35.0		
Base Number (BN)	mg KOH/g	ASTM D2896		3.8		



## **OIL ANALYSIS REPORT**

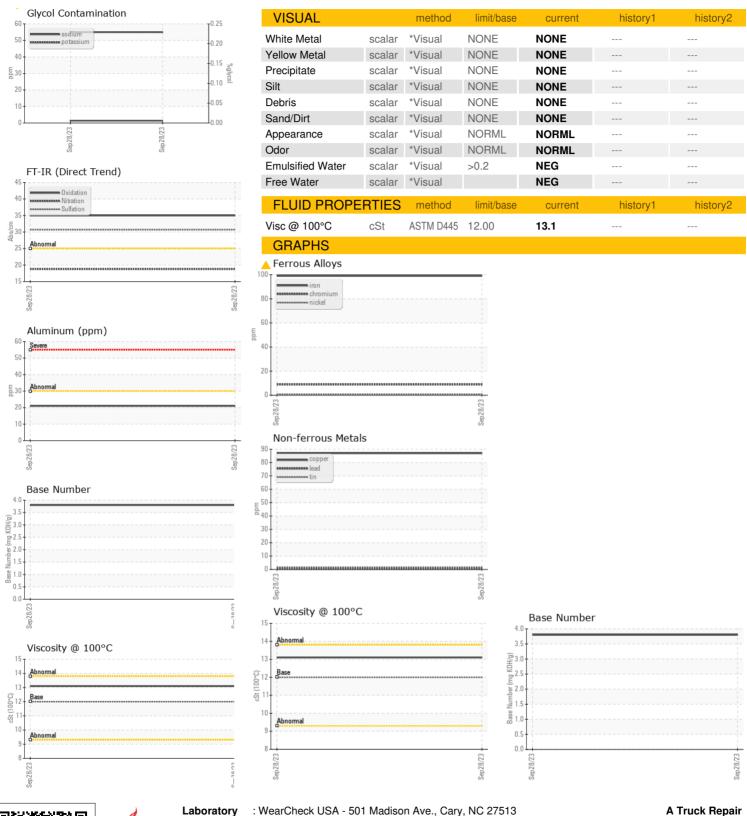





Certificate 12367

Laboratory Sample No.

Test Package : FLEET

: PCA0102596 Lab Number : 06188626 Unique Number : 11045378

Received : 23 May 2024 : 24 May 2024 Tested Diagnosed

: 28 May 2024 - Don Baldridge

9349 China Grove Church Road Pineville, NC US 28134

Contact: Vlad Melnichuk shop@migway.com

T: (980)255-3200

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)