


OIL ANALYSIS REPORT

Machine Id
406338
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

Sample Rating Trend

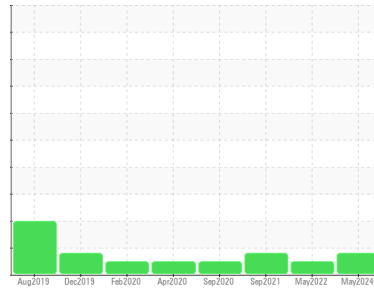

DIAGNOSIS

Recommendation
 Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 The aluminum level is abnormal. All other component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0110704	PCA0061123	PCA0042026
Sample Date	Client Info	06 May 2024	27 May 2022	05 Sep 2021
Machine Age	mls	Client Info	297262	164388
Oil Age	mls	Client Info	59255	49746
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	47	39	42
Chromium	ppm ASTM D5185m >20	4	3	3
Nickel	ppm ASTM D5185m >4	<1	0	<1
Titanium	ppm ASTM D5185m	15	<1	2
Silver	ppm ASTM D5185m >3	<1	0	<1
Aluminum	ppm ASTM D5185m >20	28	17	20
Lead	ppm ASTM D5185m >40	<1	<1	<1
Copper	ppm ASTM D5185m >330	10	26	49
Tin	ppm ASTM D5185m >15	1	2	4
Antimony	ppm ASTM D5185m	---	---	0
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	6	10	4
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 50	55	59	59
Manganese	ppm ASTM D5185m 0	<1	<1	1
Magnesium	ppm ASTM D5185m 950	893	835	924
Calcium	ppm ASTM D5185m 1050	1256	1076	1142
Phosphorus	ppm ASTM D5185m 995	999	773	885
Zinc	ppm ASTM D5185m 1180	1316	1097	1256
Sulfur	ppm ASTM D5185m 2600	3270	2379	2350

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	8	5	4
Sodium	ppm ASTM D5185m	3	3	4
Potassium	ppm ASTM D5185m >20	11	12	24





INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1.9	1.3	1.2
Nitration	Abs/cm *ASTM D7624 >20	11.0	10.6	10.7
Sulfation	Abs/.1mm *ASTM D7415 >30	24.6	23.6	23.2

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.1	17.2	17.4
Base Number (BN)	mg KOH/g ASTM D2896	5.8	5.4	---









OIL ANALYSIS REPORT

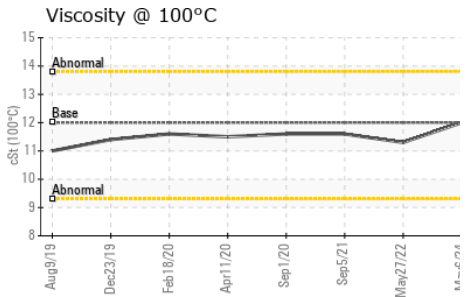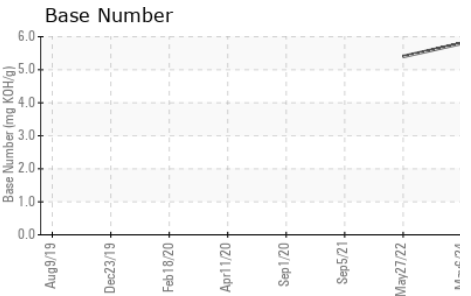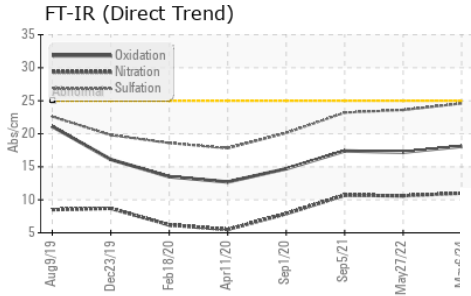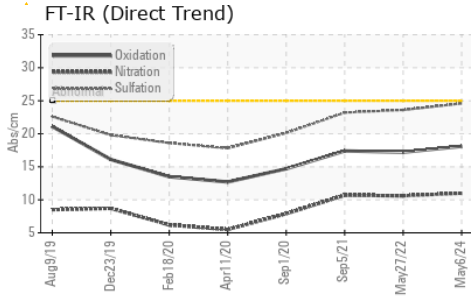

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.0	11.3	11.6

GRAPHS

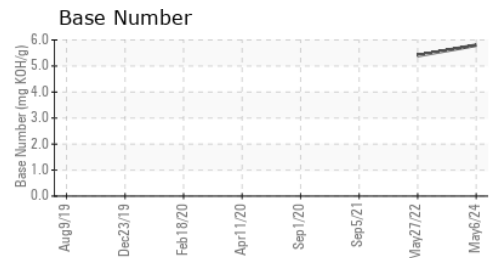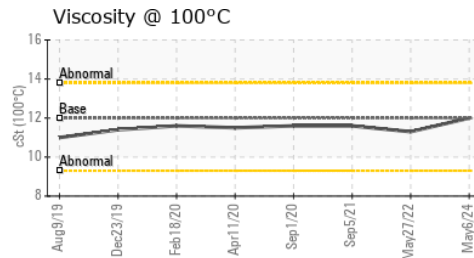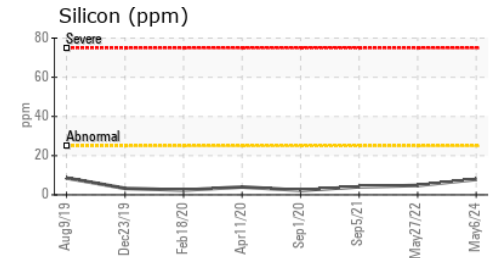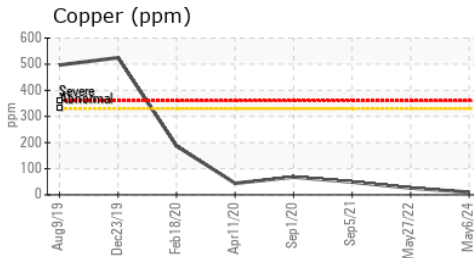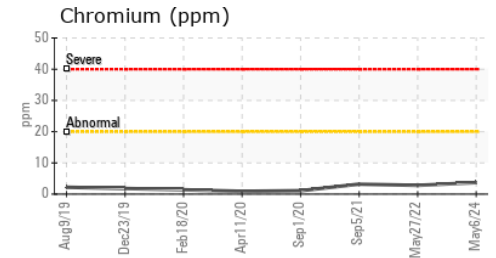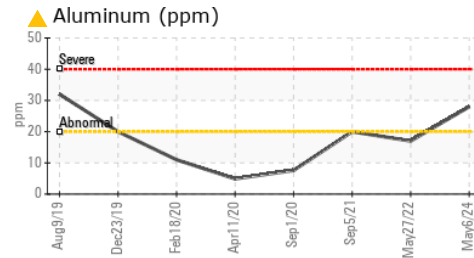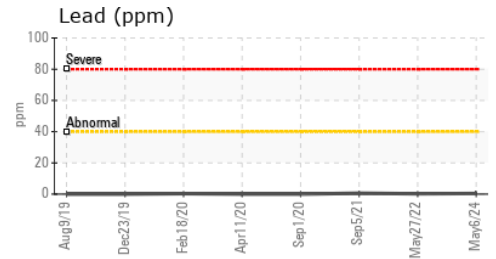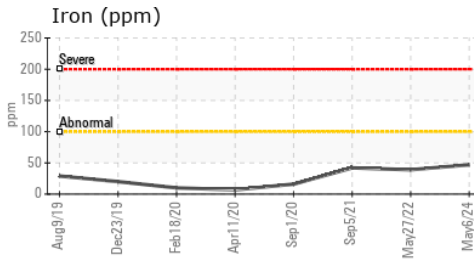

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110704
Lab Number : 06188683
Unique Number : 11045435
Test Package : MOB 1 (Additional Tests: TBN)

Received : 23 May 2024
Tested : 24 May 2024
Diagnosed : 28 May 2024 - Sean Felton

MILLER TRUCK LEASING #123
 66 KELLER AVENUE
 LANCASTER, PA
 US 17601
 Contact: RON ROBERTS
 roberts@millertransgroup.com
 T: (717)945-6205
 F: (717)945-5818

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)