




OIL ANALYSIS REPORT



Machine Id
MACK 2656
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (7 GAL)

Sample Rating Trend

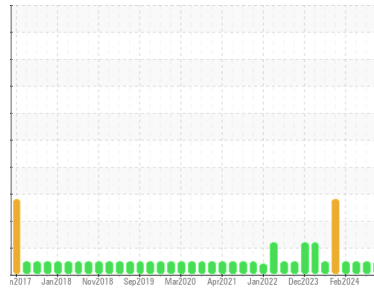

NORMAL

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0116822	GFL0116746	GFL0109023
Sample Date	Client Info			17 May 2024	30 Apr 2024	12 Mar 2024
Machine Age	hrs Client Info			34673	34544	34274
Oil Age	hrs Client Info			0	34544	34274
Oil Changed	Client Info			N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>120		13	4	4
Chromium	ppm ASTM D5185m	>20		<1	0	0
Nickel	ppm ASTM D5185m	>5		<1	0	0
Titanium	ppm ASTM D5185m	>2		<1	0	0
Silver	ppm ASTM D5185m	>2		<1	0	0
Aluminum	ppm ASTM D5185m	>20		10	1	<1
Lead	ppm ASTM D5185m	>40		<1	0	0
Copper	ppm ASTM D5185m	>330		1	0	0
Tin	ppm ASTM D5185m	>15		<1	<1	0
Vanadium	ppm ASTM D5185m			<1	0	0
Cadmium	ppm ASTM D5185m			0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0		6	10	9
Barium	ppm ASTM D5185m	0		0	0	0
Molybdenum	ppm ASTM D5185m	60		61	56	56
Manganese	ppm ASTM D5185m	0		0	<1	0
Magnesium	ppm ASTM D5185m	1010		847	810	844
Calcium	ppm ASTM D5185m	1070		1138	1065	1133
Phosphorus	ppm ASTM D5185m	1150		936	958	928
Zinc	ppm ASTM D5185m	1270		1202	1112	1167
Sulfur	ppm ASTM D5185m	2060		2951	3230	3419

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25		4	2	2
Sodium	ppm ASTM D5185m			4	0	1
Potassium	ppm ASTM D5185m	>20		24	0	0


INFRA-RED		method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>4		0.5	0.6	0.2
Nitration	Abs/cm *ASTM D7624	>20		9.1	5.6	6.5
Sulfation	Abs/.1mm *ASTM D7415	>30		20.2	17.6	17.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25		16.3	12.0	13.3
Base Number (BN)	mg KOH/g ASTM D2896	9.8		6.8	8.2	7.7




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

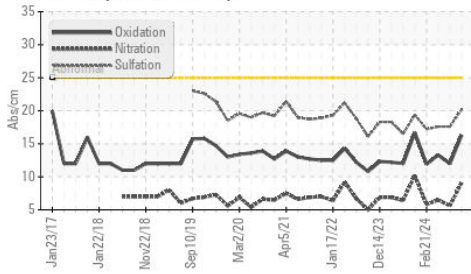

Base Number

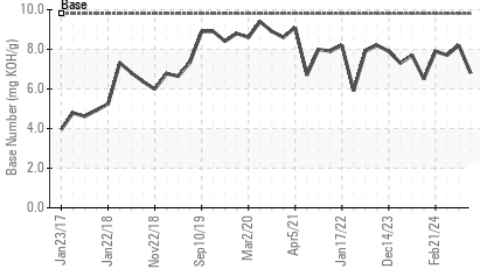

Viscosity @ 100°C

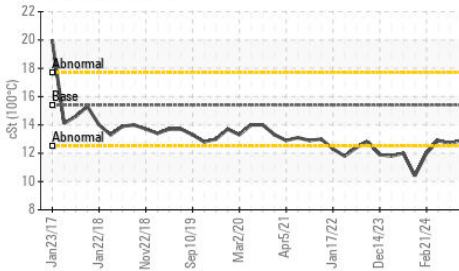


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	12.7

GRAPHS


Ferrous Alloys

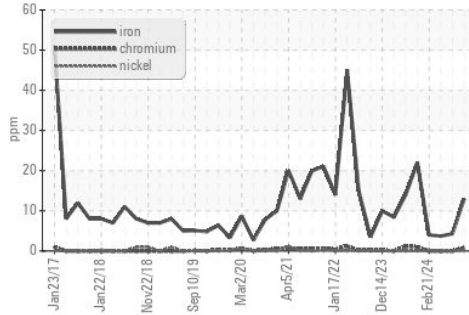


Non-ferrous Metals

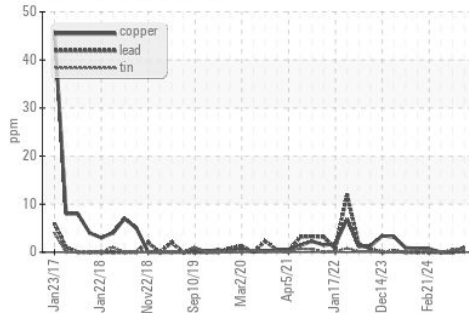

Viscosity @ 100°C

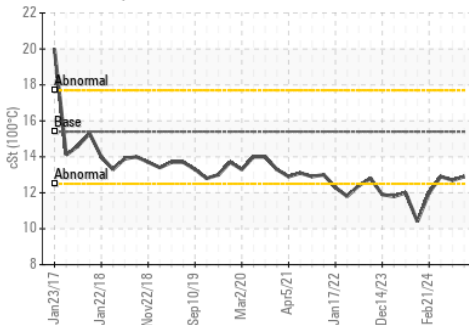

Base Number

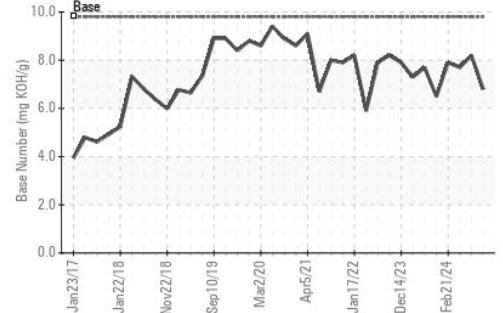

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0116822
 Lab Number : 06188732
 Unique Number : 11045484
 Test Package : FLEET

Received : 23 May 2024
 Tested : 24 May 2024
 Diagnosed : 24 May 2024 - Wes Davis

GFL Environmental - 009 - Fairburn
 6905 Roosevelt Hwy
 Fairburn, GA
 US 30213
 Contact: Eric Jones
 erjones@gflenv.com
 T: (678)630-9927
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)