


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

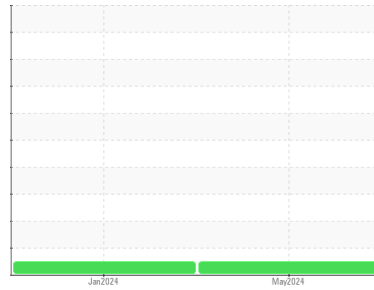

Area
(P798442) Preferred Service-Tractor
 Machine Id
[Preferred Service-Tractor] 192A02020
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (36 QTS)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info | | PCA0123683 | PCA0115794 | --- |
| Sample Date | Client Info | | 19 May 2024 | 22 Jan 2024 | --- |
| Machine Age | mls | Client Info | 331177 | 315795 | --- |
| Oil Age | mls | Client Info | 15382 | 16795 | --- |
| Oil Changed | Client Info | | Changed | Changed | --- |
| Sample Status | | | NORMAL | NORMAL | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >6.0 | <1.0 | <1.0 | --- |
| Water | WC Method | >0.2 | NEG | NEG | --- |
| Glycol | WC Method | | NEG | NEG | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 35 | 31 | --- |
| Chromium | ppm | ASTM D5185m >20 | <1 | <1 | --- |
| Nickel | ppm | ASTM D5185m >2 | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m | <1 | <1 | --- |
| Silver | ppm | ASTM D5185m >2 | 2 | 0 | --- |
| Aluminum | ppm | ASTM D5185m >25 | 5 | 4 | --- |
| Lead | ppm | ASTM D5185m >40 | 4 | 2 | --- |
| Copper | ppm | ASTM D5185m >330 | 5 | 7 | --- |
| Tin | ppm | ASTM D5185m >15 | <1 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 2 | 0 | 3 | --- |
| Barium | ppm | ASTM D5185m 0 | <1 | 2 | --- |
| Molybdenum | ppm | ASTM D5185m 50 | 62 | 60 | --- |
| Manganese | ppm | ASTM D5185m 0 | <1 | 0 | --- |
| Magnesium | ppm | ASTM D5185m 950 | 1054 | 966 | --- |
| Calcium | ppm | ASTM D5185m 1050 | 1175 | 1036 | --- |
| Phosphorus | ppm | ASTM D5185m 995 | 1103 | 963 | --- |
| Zinc | ppm | ASTM D5185m 1180 | 1346 | 1230 | --- |
| Sulfur | ppm | ASTM D5185m 2600 | 3625 | 2964 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 6 | 4 | --- |
| Sodium | ppm | ASTM D5185m | 5 | 2 | --- |
| Potassium | ppm | ASTM D5185m >20 | 3 | 3 | --- |




INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.5 | 0.4 | --- |
| Nitration | Abs/cm | *ASTM D7624 >20 | 8.7 | 8.3 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 20.2 | 18.8 | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 16.1 | 15.3 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 6.3 | 6.2 | --- |





OIL ANALYSIS REPORT

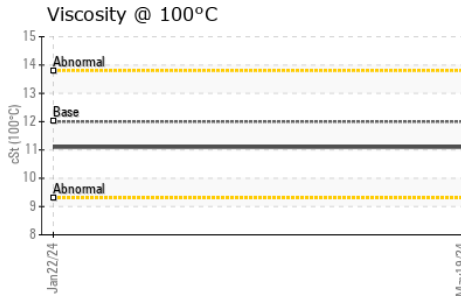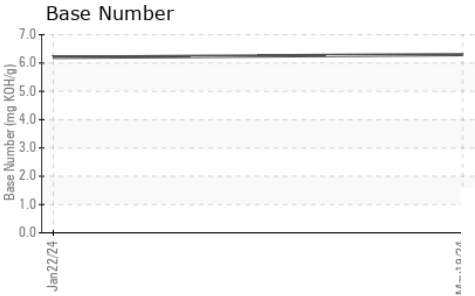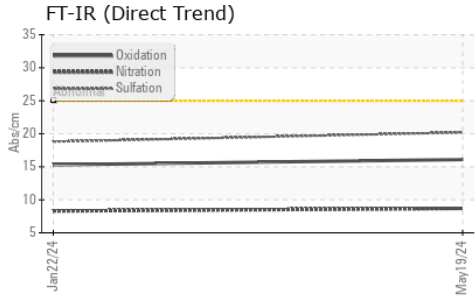

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 11.1 | --- |

GRAPHS

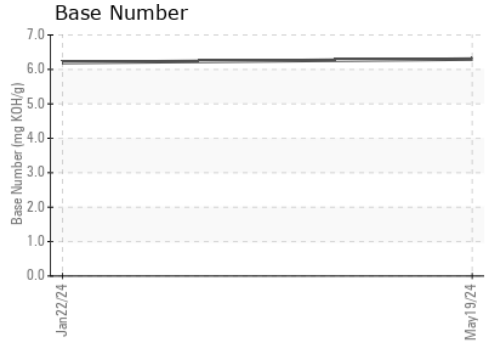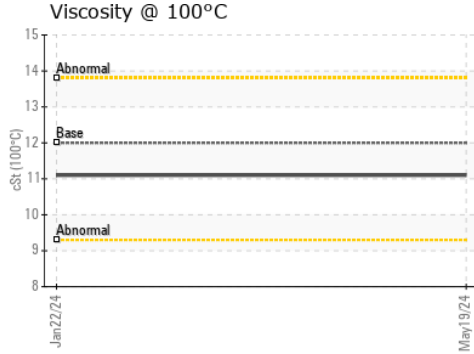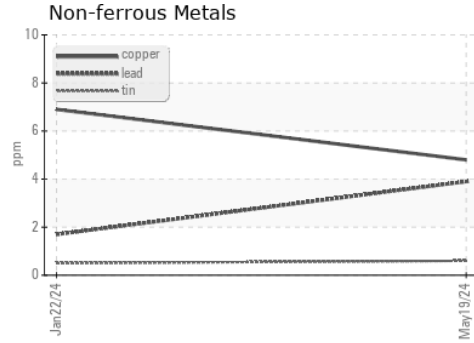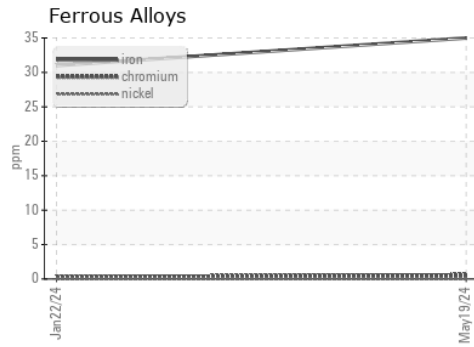

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123683 **Received** : 23 May 2024
Lab Number : 06188873 **Tested** : 24 May 2024
Unique Number : 11045625 **Diagnosed** : 28 May 2024 - Don Baldrige
Test Package : FLEET

Transervice - Shop 1920 - Preferred Service
 1955 W. North Avenue, Bldg K
 Melrose Park, IL
 US 60160
 Contact: Tom Lindeman
 tlindemann@transervice.com
 T: (630)376-8946
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)