




# OIL ANALYSIS REPORT



Area  
**(YA122669) 020**  
 Machine Id  
**2581**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (52 QTS)**

Sample Rating Trend

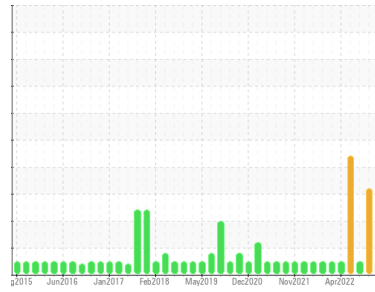

**NORMAL**



## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0117859</b>	GFL0103793	GFL0103803
Sample Date	Client Info		<b>20 May 2024</b>	23 Feb 2024	30 Nov 2023
Machine Age	hrs	Client Info	<b>29763</b>	29328	28763
Oil Age	hrs	Client Info	<b>726</b>	726	726
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	SEVERE	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>34</b>	60	18
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>11</b>	3	2
Lead	ppm	ASTM D5185m >40	<b>1</b>	4	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	4	8
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	5	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	60	55
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>915</b>	942	821
Calcium	ppm	ASTM D5185m 1070	<b>1050</b>	1100	1028
Phosphorus	ppm	ASTM D5185m 1150	<b>949</b>	1011	884
Zinc	ppm	ASTM D5185m 1270	<b>1202</b>	1242	1094
Sulfur	ppm	ASTM D5185m 2060	<b>3207</b>	2953	4519

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	8	4
Sodium	ppm	ASTM D5185m	<b>2</b>	7	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>2.3</b>	▲ 6.9	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.8</b>	17.4	5.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.4</b>	34.5	19.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.6</b>	20.3	12.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.8</b>	▲ 0.0	9.4




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

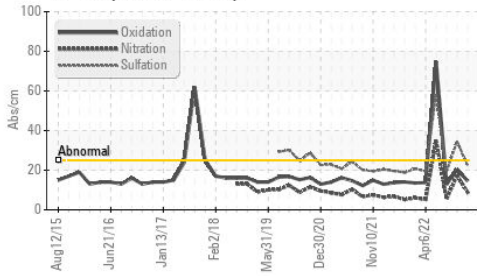

Base Number

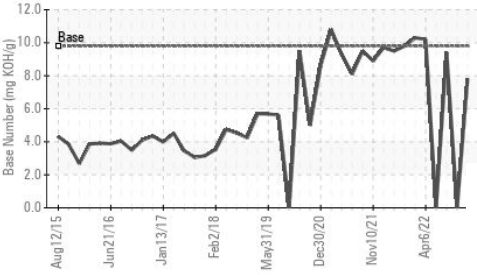

Viscosity @ 100°C

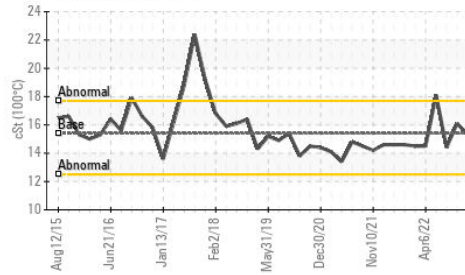


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	15.3	16.1

## GRAPHS


Ferrous Alloys

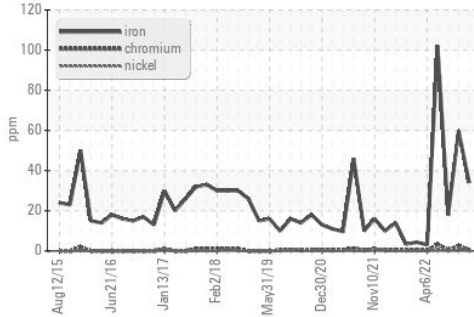


Non-ferrous Metals

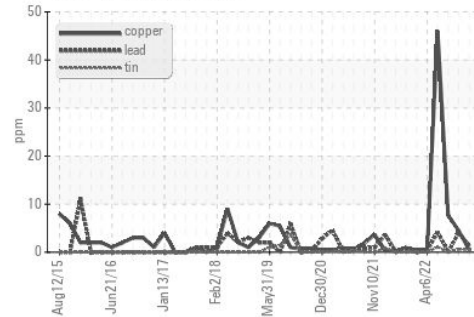

Viscosity @ 100°C

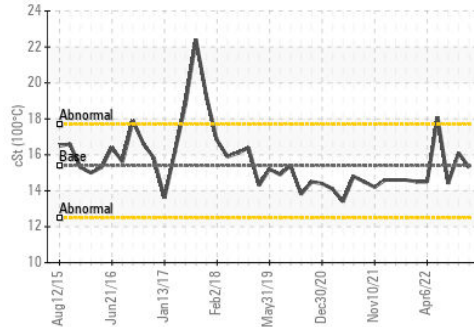

Base Number

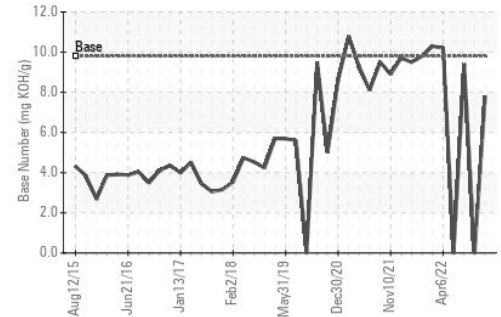

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0117859  
 Lab Number : 06188939  
 Unique Number : 11045691  
 Test Package : FLEET

Received : 23 May 2024  
 Tested : 24 May 2024  
 Diagnosed : 24 May 2024 - Wes Davis

GFL Environmental - 020 - Alamance  
 703 East Gilbreath St  
 Graham, NC  
 US 27253  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

richard.belcher@gflenv.com

T: (800)207-6618

F: (336)229-0526