




# OIL ANALYSIS REPORT

## Sample Rating Trend

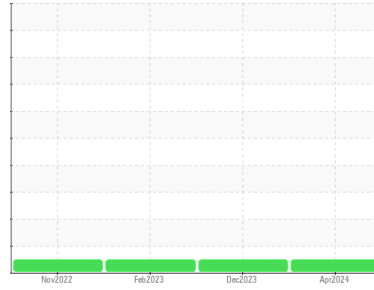

**NORMAL**



Area  
**(MC9414)**

Machine Id  
**924014**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0069957</b>	GFL0069954	GFL0059602
Sample Date	Client Info			<b>26 Apr 2024</b>	29 Dec 2023	09 Feb 2023
Machine Age	hrs	Client Info		<b>22874</b>	22403	21064
Oil Age	hrs	Client Info		<b>600</b>	600	600
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	<b>12</b>	26	19
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	2	1
Lead	ppm	ASTM D5185m	>150	<b>&lt;1</b>	5	9
Copper	ppm	ASTM D5185m	>90	<b>0</b>	4	5
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>3</b>	6	27
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>66</b>	61	56
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1029</b>	963	791
Calcium	ppm	ASTM D5185m	1070	<b>1123</b>	1087	1544
Phosphorus	ppm	ASTM D5185m	1150	<b>1100</b>	997	924
Zinc	ppm	ASTM D5185m	1270	<b>1319</b>	1288	1139
Sulfur	ppm	ASTM D5185m	2060	<b>3414</b>	2673	3179




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	<b>9</b>	26	5
Sodium	ppm	ASTM D5185m		<b>3</b>	3	7
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	<b>0.5</b>	0.6	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.2</b>	10.4	6.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	23.4	17.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.4</b>	20.9	12.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.9</b>	6.1	7.9







# OIL ANALYSIS REPORT

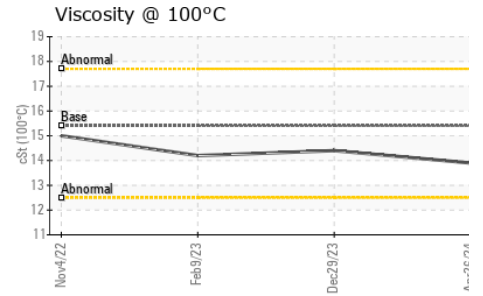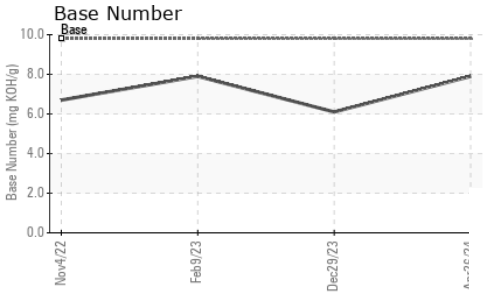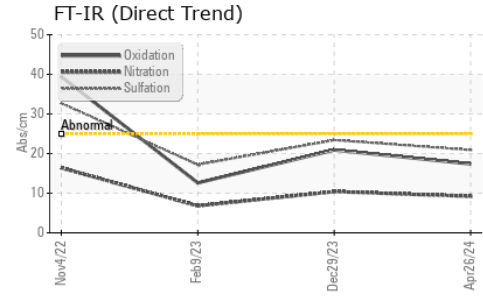

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.4

## GRAPHS

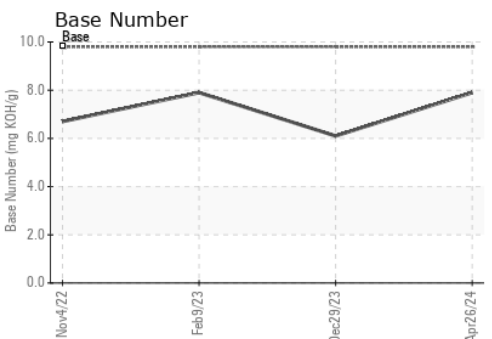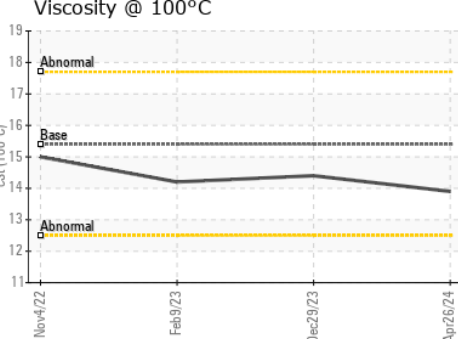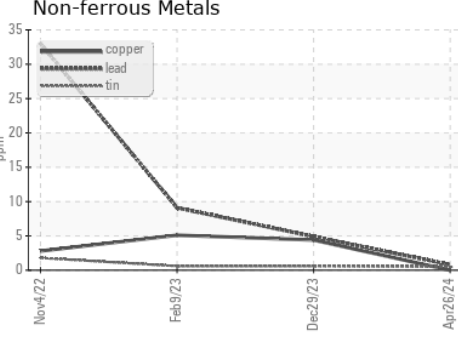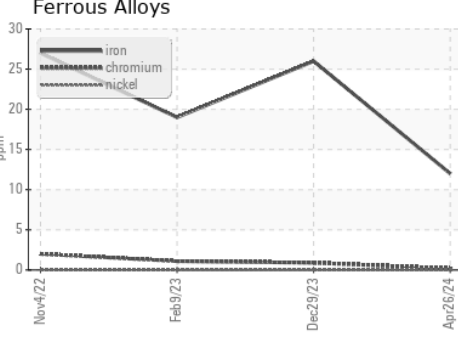

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0069957      **Received** : 23 May 2024  
**Lab Number** : 06188946      **Tested** : 24 May 2024  
**Unique Number** : 11045698      **Diagnosed** : 24 May 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 902 - Chilton HC**  
 428 High St  
 Chilton, WI  
 US 53014  
 Contact: Keith Mueller  
 keith.mueller@gflenv.com  
 T: (920)374-1404  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)