




# OIL ANALYSIS REPORT

Sample Rating Trend

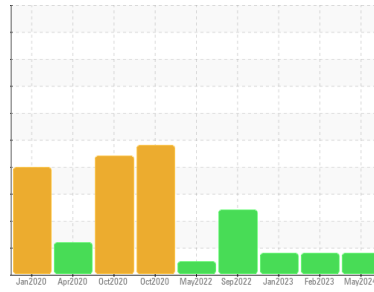

FUEL



Area  
**(80J2TW)**  
 Machine Id  
**722022-310030**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0120187</b>	GFL0070303	GFL0068598
Sample Date	Client Info	<b>21 May 2024</b>	13 Feb 2023	11 Jan 2023
Machine Age	hrs	<b>11661</b>	19131	18965
Oil Age	hrs	<b>0</b>	300	600
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	<b>33</b>	21	37
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	<1	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	2	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	1	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m	>330	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	<b>5</b>	<1	1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>56</b>	56	58
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>896</b>	838	873
Calcium	ppm	ASTM D5185m	1070	<b>1070</b>	1016	1009
Phosphorus	ppm	ASTM D5185m	1150	<b>933</b>	927	933
Zinc	ppm	ASTM D5185m	1270	<b>1178</b>	1120	1107
Sulfur	ppm	ASTM D5185m	2060	<b>3249</b>	2843	3236

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	<b>17</b>	4	6
Sodium	ppm	ASTM D5185m		<b>5</b>	10	16
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	2	1
Fuel	%	ASTM D3524	>5	<b>▲ 5.3</b>	▲ 5.0	▲ 5.2

## INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.7	1.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.6</b>	8.1	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.7</b>	19.8	21.5


## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.1</b>	15.4	18.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.0</b>	9.0	8.2




# OIL ANALYSIS REPORT


## Fuel Dilution

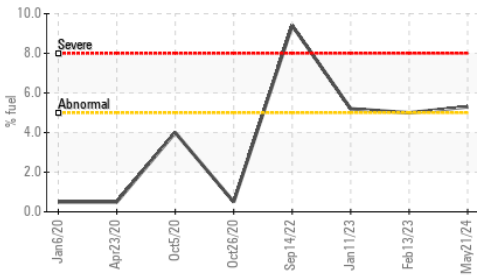


## FT-IR (Direct Trend)

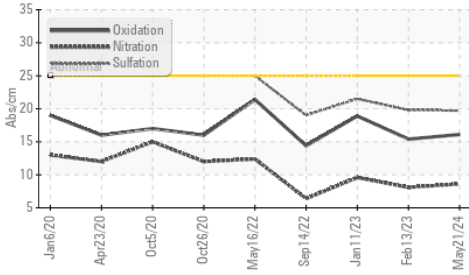

## Base Number

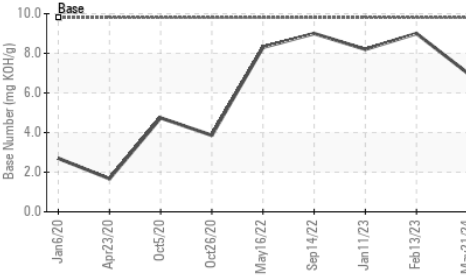

## Viscosity @ 100°C

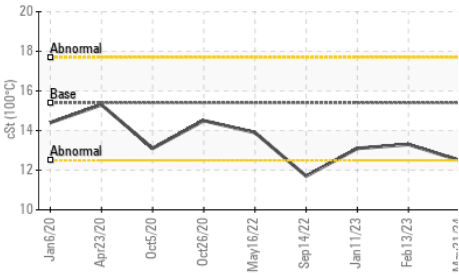


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.5	13.3

## GRAPHS


### Ferrous Alloys

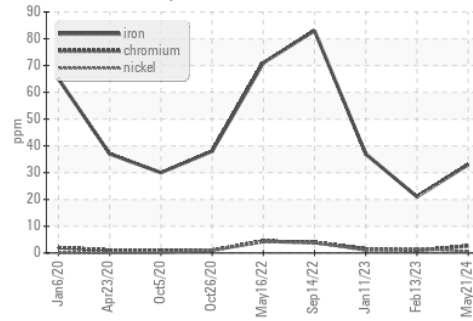


### Non-ferrous Metals

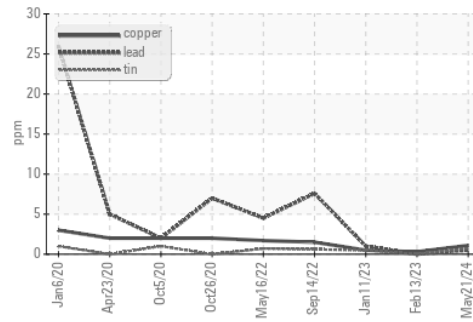

### Viscosity @ 100°C

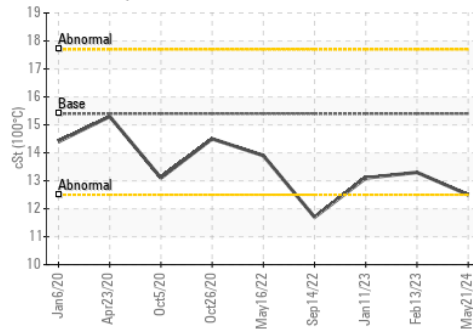

### Base Number

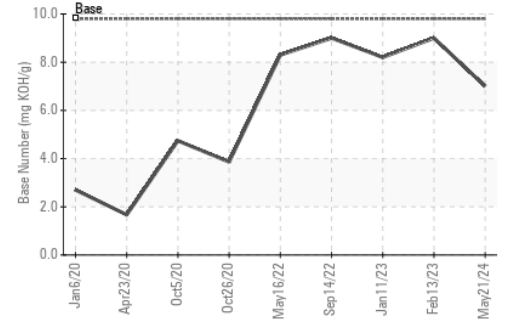

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0120187

Lab Number : 06188961

Unique Number : 11045713

Test Package : FLEET ( Additional Tests: PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 23 May 2024

Tested : 28 May 2024

Diagnosed : 28 May 2024 - Wes Davis

GFL Environmental - 836 - Kansas City Hauling

7801 East Truman Road

Kansas City, MO

US 64126

Contact: Loyce Stewart

loyce.stewart@gflen.com

T:

F: