



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id

**732007**

Component

**Transmission (Auto)**

Fluid

**PETRO CANADA DuraDrive HD Synthetic 668 (32 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0106828</b>	---	---
Sample Date	Client Info	<b>15 May 2024</b>	---	---
Machine Age	hrs Client Info	<b>6629</b>	---	---
Oil Age	hrs Client Info	<b>6629</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >230	<b>44</b>	---	---
Chromium	ppm ASTM D5185m >2	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm ASTM D5185m >5	<b>&lt;1</b>	---	---
Aluminum	ppm ASTM D5185m >65	<b>16</b>	---	---
Lead	ppm ASTM D5185m >55	<b>3</b>	---	---
Copper	ppm ASTM D5185m >85	<b>9</b>	---	---
Tin	ppm ASTM D5185m >5	<b>3</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>76</b>	---	---
Barium	ppm ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Manganese	ppm ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm ASTM D5185m	<b>2</b>	---	---
Calcium	ppm ASTM D5185m	<b>112</b>	---	---
Phosphorus	ppm ASTM D5185m	<b>209</b>	---	---
Zinc	ppm ASTM D5185m	<b>6</b>	---	---
Sulfur	ppm ASTM D5185m	<b>1606</b>	---	---

## CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>4</b>	---	---
Sodium	ppm ASTM D5185m	<b>7</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>3</b>	---	---

## VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar *Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar *Visual NONE	<b>NONE</b>	---	---
Silt	scalar *Visual NONE	<b>NONE</b>	---	---
Debris	scalar *Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar *Visual NONE	<b>NONE</b>	---	---
Appearance	scalar *Visual NORML	<b>NORML</b>	---	---
Odor	scalar *Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar *Visual >0.1	<b>NEG</b>	---	---
Free Water	scalar *Visual	<b>NEG</b>	---	---



# OIL ANALYSIS REPORT



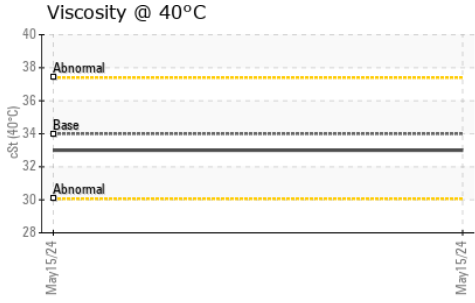


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 34	<b>33.0</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

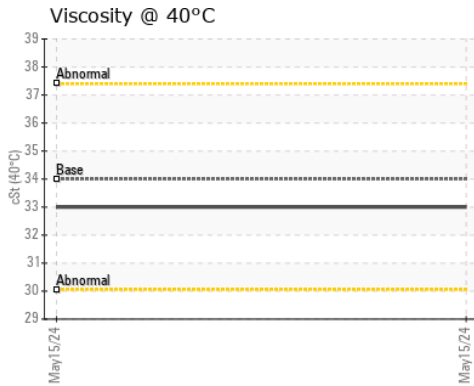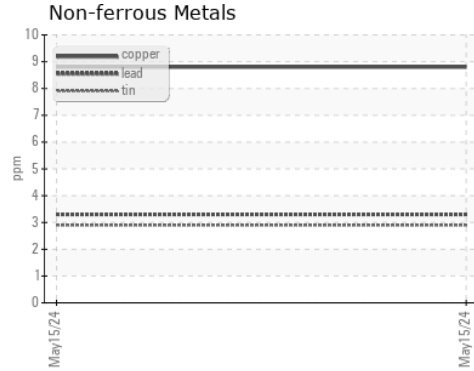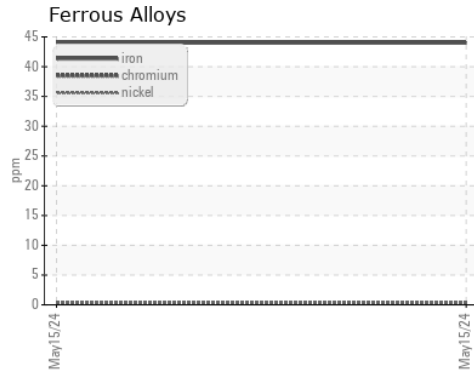

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0106828  
**Lab Number** : **06189646**  
**Unique Number** : 11046398  
**Test Package** : FLEET

**Received** : 23 May 2024  
**Tested** : 24 May 2024  
**Diagnosed** : 24 May 2024 - Wes Davis

**GFL Environmental - 856 - Houston South**  
 8515 Highway 6 South  
 Houston, TX  
 US 77083  
 Contact: Apolinar Zacarias  
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: