



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
834005
 Component
Transmission (Auto)
 Fluid
DEXRON III (2418 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0121933	---	---
Sample Date	Client Info	15 May 2024	---	---
Machine Age	hrs Client Info	2418	---	---
Oil Age	hrs Client Info	1844	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >325	131	---	---
Chromium	ppm ASTM D5185m >2	<1	---	---
Nickel	ppm ASTM D5185m >2	1	---	---
Titanium	ppm ASTM D5185m >3	<1	---	---
Silver	ppm ASTM D5185m >5	<1	---	---
Aluminum	ppm ASTM D5185m >75	40	---	---
Lead	ppm ASTM D5185m >40	8	---	---
Copper	ppm ASTM D5185m >50	13	---	---
Tin	ppm ASTM D5185m >10	6	---	---
Vanadium	ppm ASTM D5185m	<1	---	---
Cadmium	ppm ASTM D5185m	<1	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	106	---	---
Barium	ppm ASTM D5185m	<1	---	---
Molybdenum	ppm ASTM D5185m	<1	---	---
Manganese	ppm ASTM D5185m	3	---	---
Magnesium	ppm ASTM D5185m	3	---	---
Calcium	ppm ASTM D5185m	119	---	---
Phosphorus	ppm ASTM D5185m	306	---	---
Zinc	ppm ASTM D5185m	8	---	---
Sulfur	ppm ASTM D5185m	1956	---	---

CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	9	---	---
Sodium	ppm ASTM D5185m	9	---	---
Potassium	ppm ASTM D5185m >20	5	---	---

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	NONE	---	---
Yellow Metal	scalar *Visual NONE	NONE	---	---
Precipitate	scalar *Visual NONE	NONE	---	---
Silt	scalar *Visual NONE	NONE	---	---
Debris	scalar *Visual NONE	LIGHT	---	---
Sand/Dirt	scalar *Visual NONE	NONE	---	---
Appearance	scalar *Visual NORML	NORML	---	---
Odor	scalar *Visual NORML	NORML	---	---
Emulsified Water	scalar *Visual >0.1	NEG	---	---
Free Water	scalar *Visual	NEG	---	---



OIL ANALYSIS REPORT



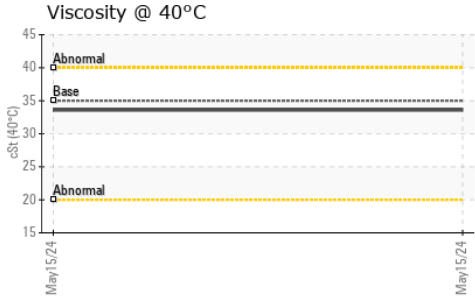


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	35.0	33.6	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

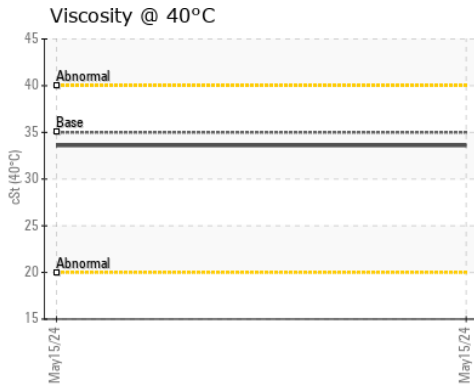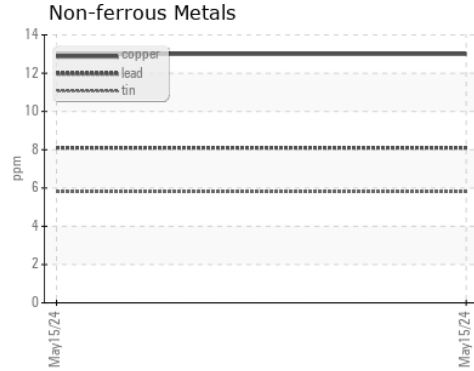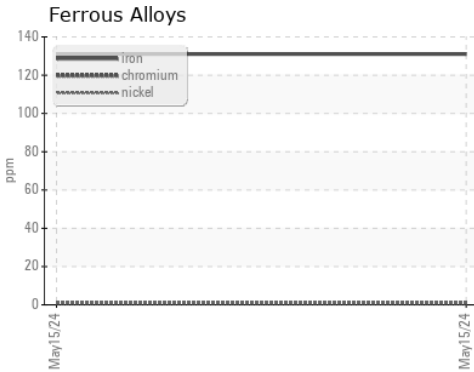

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0121933
Lab Number : **06189647**
Unique Number : 11046399
Test Package : FLEET

Received : 23 May 2024
Tested : 24 May 2024
Diagnosed : 24 May 2024 - Wes Davis

GFL Environmental - 856 - Houston South
 8515 Highway 6 South
 Houston, TX
 US 77083
 Contact: Apolinar Zacarias
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: