


OIL ANALYSIS REPORT

Area
Nickelson
 Machine Id
Sany SY365 SY036MCB00618 Nickelson
 Component
Hydraulic System
 Fluid
CITGO AW HYDRAULIC ISO 46 (--- GAL)

Sample Rating Trend

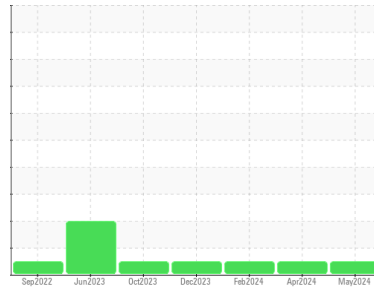

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0115566	PCA0115502	LW0008311
Sample Date	Client Info			20 May 2024	04 Apr 2024	28 Feb 2024
Machine Age	hrs	Client Info		3112	2845	2576
Oil Age	hrs	Client Info		3112	2845	2576
Oil Changed	Client Info			Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	5	5	3
Chromium	ppm	ASTM D5185m	>10	1	1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	1	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>10	2	2	<1
Lead	ppm	ASTM D5185m	>10	<1	<1	3
Copper	ppm	ASTM D5185m	>75	4	3	2
Tin	ppm	ASTM D5185m	>10	<1	1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		73	63	59
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		4	4	3
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		50	48	47
Calcium	ppm	ASTM D5185m		1985	1892	1841
Phosphorus	ppm	ASTM D5185m		753	856	788
Zinc	ppm	ASTM D5185m		1089	1047	909
Sulfur	ppm	ASTM D5185m		2585	2703	2222

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6	6	5
Sodium	ppm	ASTM D5185m		0	0	1
Potassium	ppm	ASTM D5185m	>20	2	2	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT








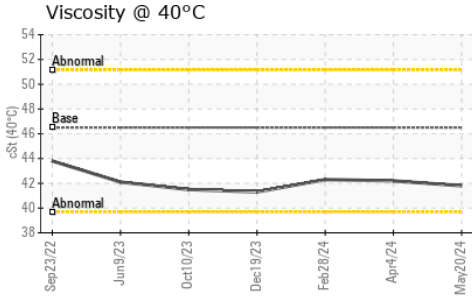


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.5	41.8	42.2	42.3

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS

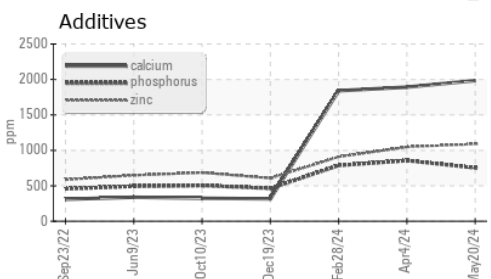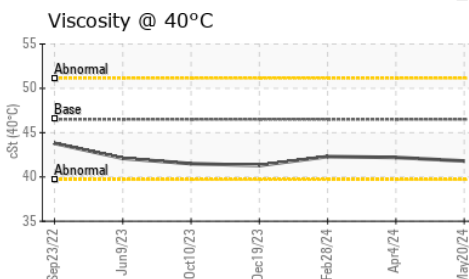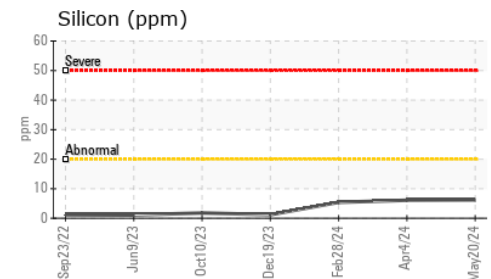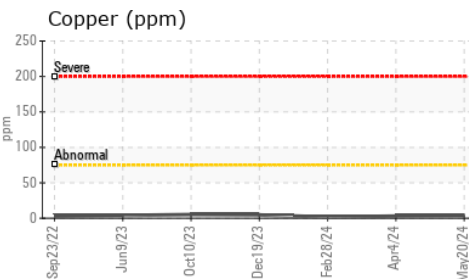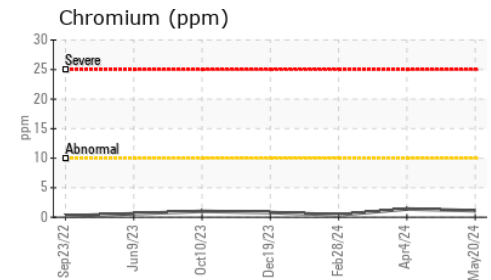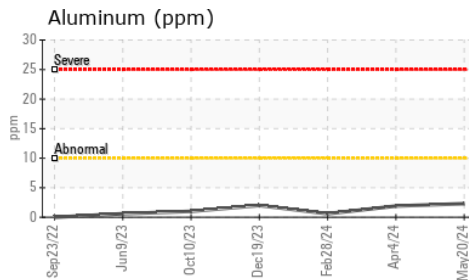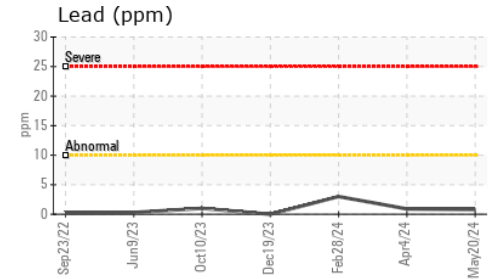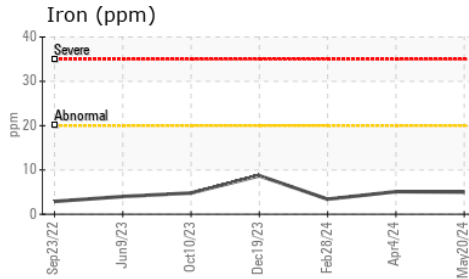

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0115566 **Received** : 23 May 2024
Lab Number : 06189661 **Tested** : 25 May 2024
Unique Number : 11046413 **Diagnosed** : 30 May 2024 - Jonathan Hester
Test Package : MOB 1

CHICAGO MACHINERY INC
 3142 EAST LINCOLN
 LYNWOOD, IL
 US 60411-7728
 Contact: Mike Korbelik
 mike@chicagomachineryinc.com
 T: (708)758-2060
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)