




# OIL ANALYSIS REPORT



Area  
**(24552UA)**  
Machine Id  
**811009**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

Sample Rating Trend

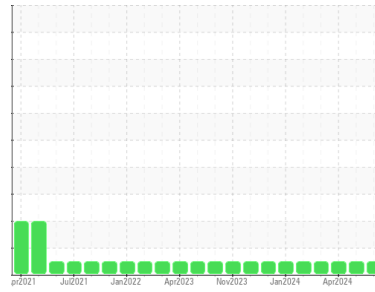

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0111910</b>	GFL0116608	GFL0116577
Sample Date	Client Info	<b>21 May 2024</b>	26 Apr 2024	04 Apr 2024
Machine Age	hrs Client Info	<b>8717</b>	8562	8401
Oil Age	hrs Client Info	<b>8376</b>	8382	180
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>9</b>	5	3
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >5	<b>1</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>1</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	<1
Lead	ppm ASTM D5185m >40	<b>1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>4</b>	2	1
Tin	ppm ASTM D5185m >15	<b>2</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>12</b>	13	16
Barium	ppm ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 100	<b>66</b>	58	62
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Magnesium	ppm ASTM D5185m 450	<b>990</b>	884	1043
Calcium	ppm ASTM D5185m 3000	<b>1268</b>	1086	1266
Phosphorus	ppm ASTM D5185m 1150	<b>1108</b>	1016	1138
Zinc	ppm ASTM D5185m 1350	<b>1346</b>	1204	1378
Sulfur	ppm ASTM D5185m 4250	<b>3648</b>	3167	4233

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	3	2
Sodium	ppm ASTM D5185m >216	<b>&lt;1</b>	<1	<1
Potassium	ppm ASTM D5185m >20	<b>2</b>	2	<1

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.5</b>	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>8.8</b>	6.5	5.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.1</b>	18.1	17.8


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.8</b>	13.1	13.2
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>7.4</b>	8.6	9.0




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

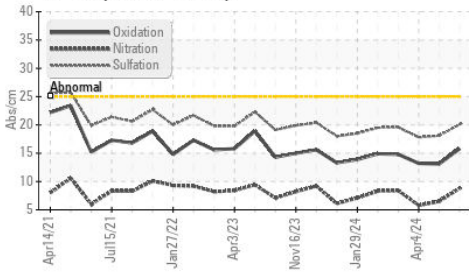

Base Number

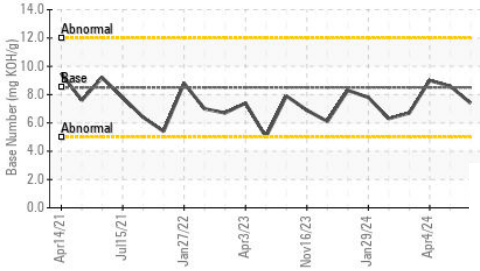

Viscosity @ 100°C

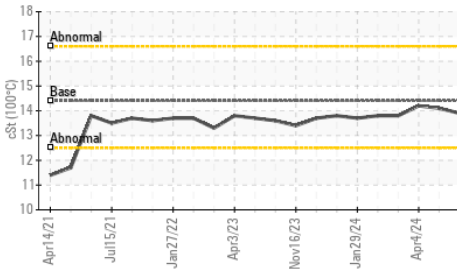


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	14.1

## GRAPHS


Ferrous Alloys

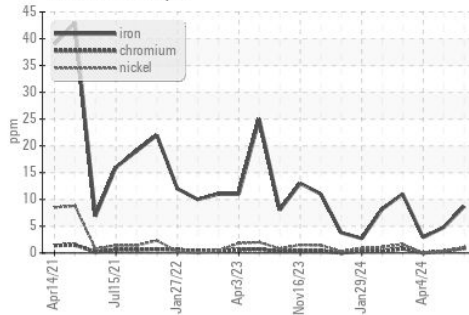


Non-ferrous Metals

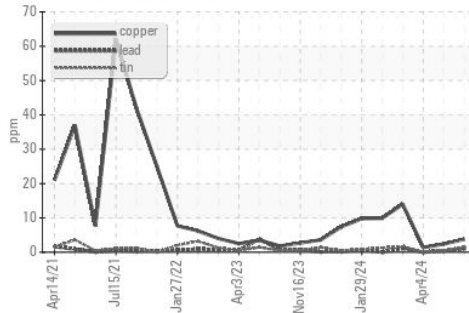

Viscosity @ 100°C

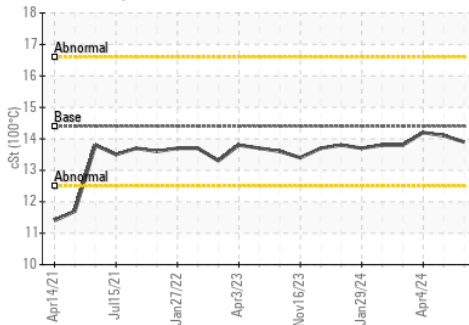

Base Number

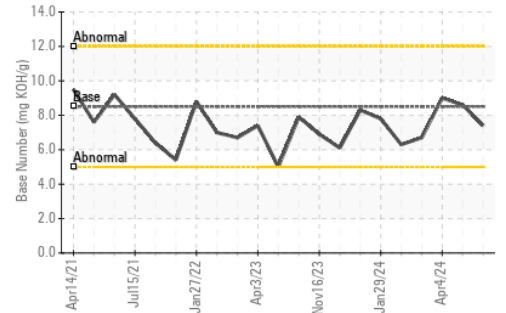

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111910  
**Lab Number** : 06189909  
**Unique Number** : 11046661  
**Test Package** : FLEET

**Received** : 23 May 2024  
**Tested** : 25 May 2024  
**Diagnosed** : 29 May 2024 - Sean Felton

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: