




# OIL ANALYSIS REPORT

Sample Rating Trend

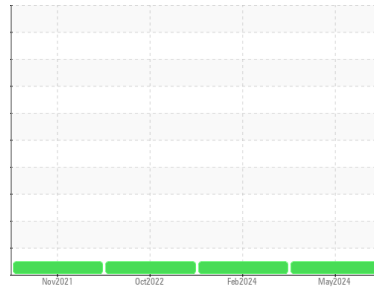

**NORMAL**



Machine Id  
**827040 MACK LR613**  
 Component  
**Diesel Engine**  
 Fluid  
**TIER ONE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115302</b>	GFL0102217	GFL0056984
Sample Date	Client Info		<b>20 May 2024</b>	26 Feb 2024	03 Oct 2022
Machine Age	hrs	Client Info	<b>14951</b>	14408	12484
Oil Age	hrs	Client Info	<b>2151</b>	300	600
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>23</b>	25	3
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	3	2
Lead	ppm	ASTM D5185m >40	<b>4</b>	9	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	5	<1
Tin	ppm	ASTM D5185m >15	<b>2</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	69	5
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Molybdenum	ppm	ASTM D5185m	<b>57</b>	73	59
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>855</b>	815	836
Calcium	ppm	ASTM D5185m	<b>1096</b>	1190	1076
Phosphorus	ppm	ASTM D5185m	<b>1056</b>	925	968
Zinc	ppm	ASTM D5185m	<b>1234</b>	1120	1162
Sulfur	ppm	ASTM D5185m	<b>3148</b>	2716	3102

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	12	3
Sodium	ppm	ASTM D5185m	<b>5</b>	3	4
Potassium	ppm	ASTM D5185m >20	<b>4</b>	1	2

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.7</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.1</b>	9.7	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.6</b>	21.9	21.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.0</b>	19.3	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.8</b>	7.0	7.8







# OIL ANALYSIS REPORT

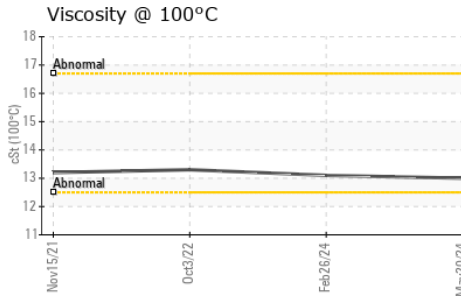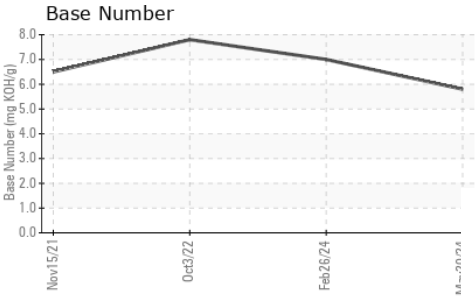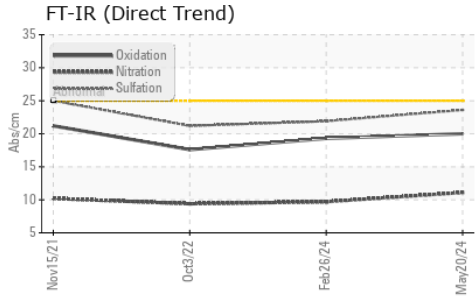

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.0	13.1	13.3

## GRAPHS

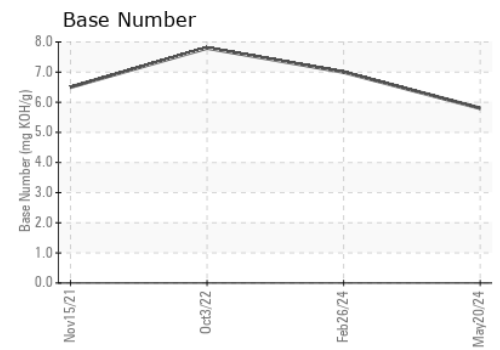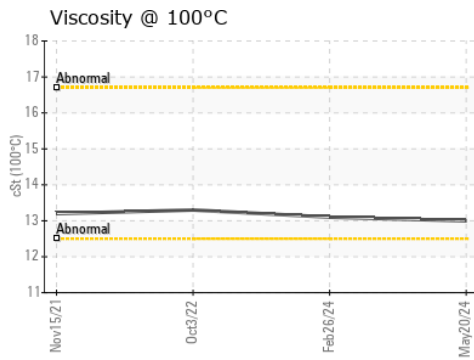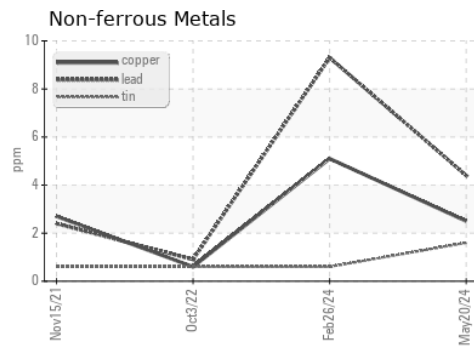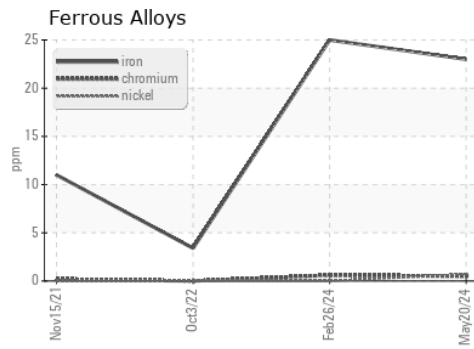

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115302      **Received** : 23 May 2024  
**Lab Number** : 06189989      **Tested** : 31 May 2024  
**Unique Number** : 11046741      **Diagnosed** : 31 May 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 642- Grand Rapids Hauling**  
 5826 Alden Nash Ave SE  
 Lowell, MI  
 US 49331

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)