




# OIL ANALYSIS REPORT

Sample Rating Trend

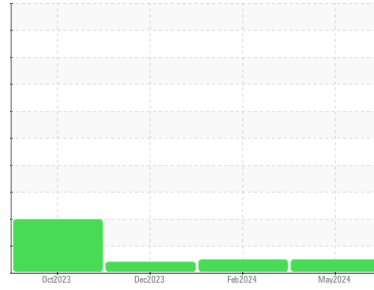

**NORMAL**



Machine Id

**414123**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Engine )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0112111</b>	GFL0112114	GFL0094062
Sample Date	Client Info			<b>21 May 2024</b>	17 Feb 2024	04 Dec 2023
Machine Age	mls	Client Info		<b>29609</b>	18889	9412
Oil Age	mls	Client Info		<b>29609</b>	18889	9412
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>16</b>	63	42
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	9
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>85	<b>&lt;1</b>	3	12
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	26
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185m	60	<b>46</b>	53	20
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	5
Magnesium	ppm	ASTM D5185m	1010	<b>12</b>	57	594
Calcium	ppm	ASTM D5185m	1070	<b>2310</b>	2259	1553
Phosphorus	ppm	ASTM D5185m	1150	<b>990</b>	1007	767
Zinc	ppm	ASTM D5185m	1270	<b>1221</b>	1149	945
Sulfur	ppm	ASTM D5185m	2060	<b>3325</b>	2974	2900

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>13</b>	8	18
Sodium	ppm	ASTM D5185m		<b>1</b>	0	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	9	30


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.7	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.3</b>	9.7	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.5</b>	19.0	21.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>8.7</b>	12.6	16.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.7</b>	5.3	6.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

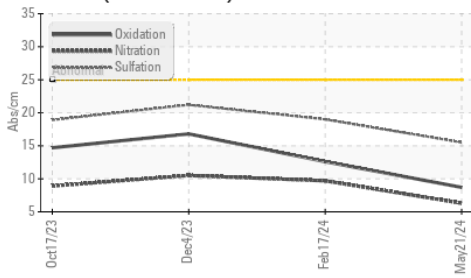

Base Number

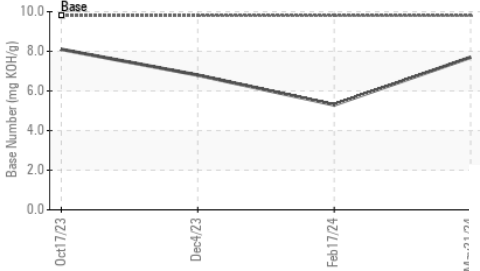

Viscosity @ 100°C

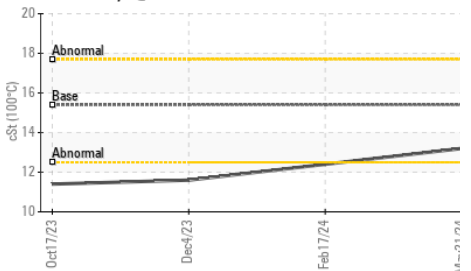


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	12.4

## GRAPHS


Ferrous Alloys

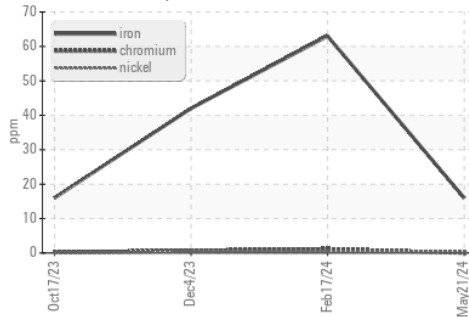


Non-ferrous Metals

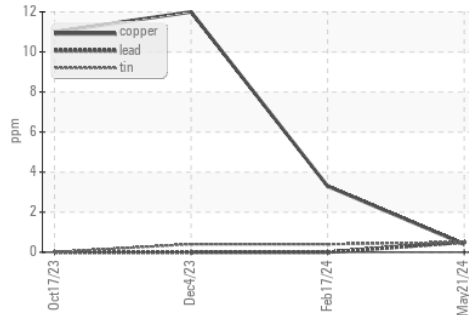

Viscosity @ 100°C

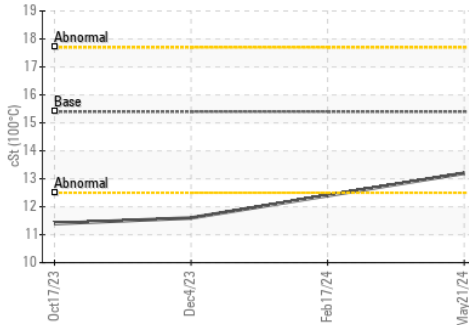

Base Number

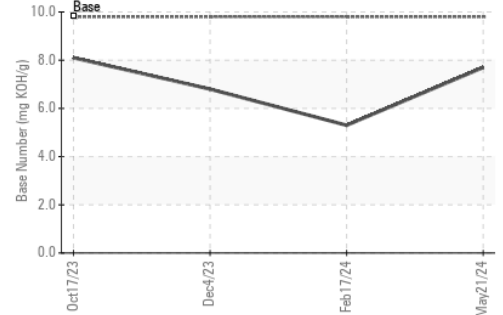

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0112111  
**Lab Number** : 06190227  
**Unique Number** : 11046979  
**Test Package** : FLEET

**Received** : 24 May 2024  
**Tested** : 29 May 2024  
**Diagnosed** : 29 May 2024 - Sean Felton

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498

Contact: Adrian Martinez  
 adrianmartinez@gflenv.com

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: