




# OIL ANALYSIS REPORT

### Sample Rating Trend

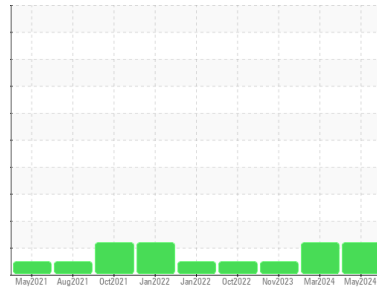

GLYCOL



Area  
**(BA85871)**  
Machine Id  
**4565M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (5 GAL)**

## DIAGNOSIS

### Recommendation

Check for low coolant level. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115059</b>	GFL0115022	GFL0089126
Sample Date	Client Info		<b>14 May 2024</b>	05 Mar 2024	25 Nov 2023
Machine Age	hrs	Client Info	<b>20315</b>	19724	19393
Oil Age	hrs	Client Info	<b>591</b>	421	17563
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>ATTENTION</b>	ATTENTION	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>75	<b>23</b>	15	2
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>4</b>	2	1
Lead	ppm	ASTM D5185m	>25	<b>1</b>	0	0
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>3</b>	<1	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	60	58
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>941</b>	822	907
Calcium	ppm	ASTM D5185m	1070	<b>999</b>	930	995
Phosphorus	ppm	ASTM D5185m	1150	<b>1009</b>	834	1005
Zinc	ppm	ASTM D5185m	1270	<b>1257</b>	1043	1223
Sulfur	ppm	ASTM D5185m	2060	<b>3384</b>	2589	3024

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	9	10
Sodium	ppm	ASTM D5185m		<b>90</b>	148	68
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	10
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	<b>0.5</b>	0.6	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	9.5	5.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.4</b>	19.5	18.1


## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>11.0</b>	16.4	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.2</b>	7.7	9.1




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

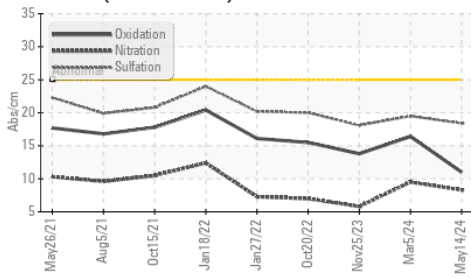


Glycol Contamination

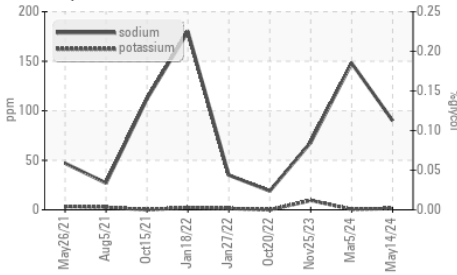

Viscosity @ 100°C

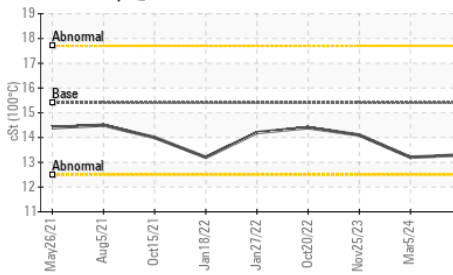

Glycol Contamination

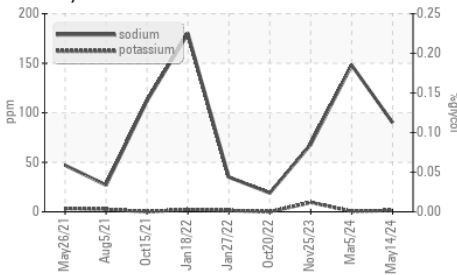

## VISUAL


method	limit/base	current	history1	history2
White Metal	*Visual	NONE	NONE	NONE
Yellow Metal	*Visual	NONE	NONE	NONE
Precipitate	*Visual	NONE	NONE	NONE
Silt	*Visual	NONE	NONE	NONE
Debris	*Visual	NONE	NONE	NONE
Sand/Dirt	*Visual	NONE	NONE	NONE
Appearance	*Visual	NORML	NORML	NORML
Odor	*Visual	NORML	NORML	NORML
Emulsified Water	*Visual	>0.2	NEG	NEG
Free Water	*Visual		NEG	NEG

## FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C	ASTM D445	15.4	13.3	13.2

## GRAPHS


Ferrous Alloys

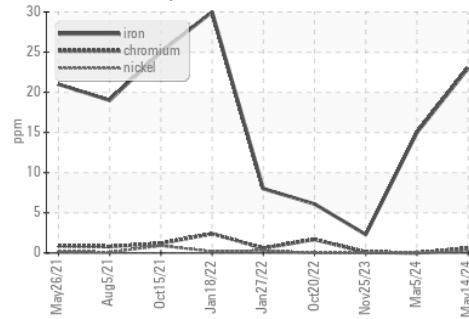


Non-ferrous Metals

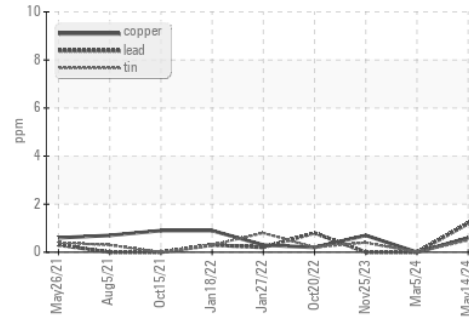

Viscosity @ 100°C

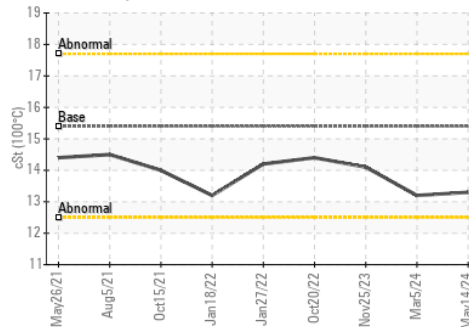

Base Number

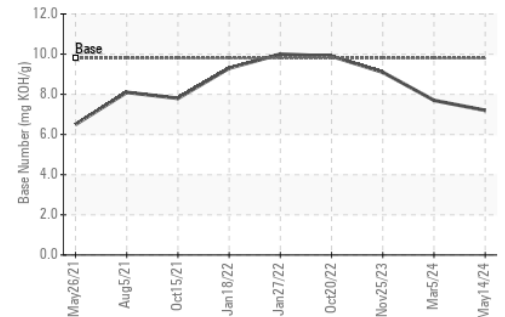

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0115059

Lab Number : 06190232

Unique Number : 11046984

Test Package : FLEET ( Additional Tests: Glycol )

Received : 24 May 2024

Tested : 31 May 2024

Diagnosed : 31 May 2024 - Sean Felton

GFL Environmental - 405 - Arbor Hills

7811 Chubb Rd

NORTHVILLE, MI

US 48168

Contact: Anthony Hopkins

ahopkins@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)