




OIL ANALYSIS REPORT

Area
(02KJOA)
 Machine Id
421027-402310
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

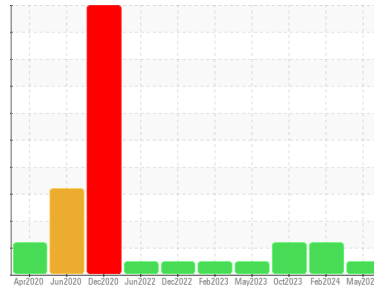

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0122792	GFL0109841	GFL0093695
Sample Date	Client Info	21 May 2024	16 Feb 2024	13 Oct 2023
Machine Age	hrs	11759	11712	11738
Oil Age	hrs	47	600	0
Oil Changed	Client Info	Not Changed	Changed	Not Changed
Sample Status		NORMAL	ATTENTION	ATTENTION

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >2.0	<1.0	0.7	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	0.0	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	5	17	12
Chromium	ppm ASTM D5185m >20	0	<1	<1
Nickel	ppm ASTM D5185m >4	<1	2	3
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	<1	0	<1
Aluminum	ppm ASTM D5185m >20	2	2	4
Lead	ppm ASTM D5185m >40	<1	0	<1
Copper	ppm ASTM D5185m >330	0	<1	0
Tin	ppm ASTM D5185m >15	<1	0	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	12	39	45
Barium	ppm ASTM D5185m 0	0	<1	0
Molybdenum	ppm ASTM D5185m 60	58	56	53
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	924	571	617
Calcium	ppm ASTM D5185m 1070	1134	1338	1477
Phosphorus	ppm ASTM D5185m 1150	980	763	834
Zinc	ppm ASTM D5185m 1270	1221	897	985
Sulfur	ppm ASTM D5185m 2060	3541	2469	2592

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	5	8	8
Sodium	ppm ASTM D5185m	43	172	97
Potassium	ppm ASTM D5185m >20	2	8	5

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	4.7	6.7	6.2
Sulfation	Abs/.1mm *ASTM D7415 >30	17.1	18.7	18.5


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	12.9	15.3	15.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.2	9.5	9.4




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

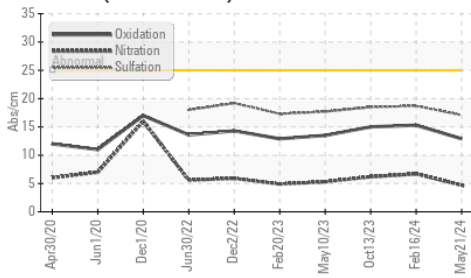

Base Number

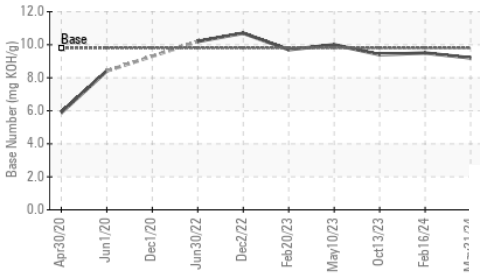

Viscosity @ 100°C

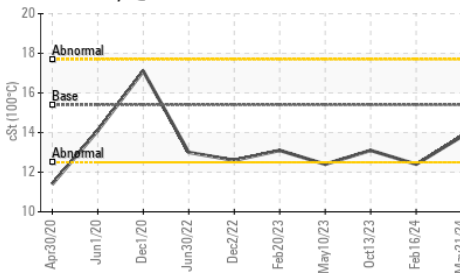


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	12.4

GRAPHS


Ferrous Alloys

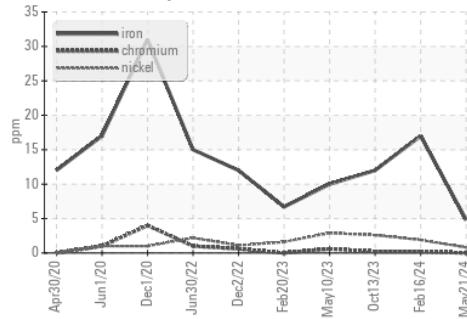


Non-ferrous Metals

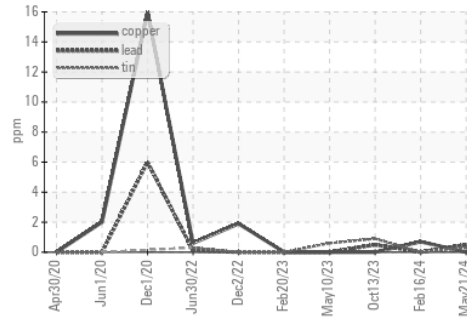

Viscosity @ 100°C

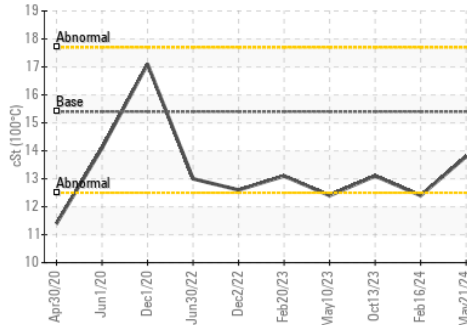

Base Number

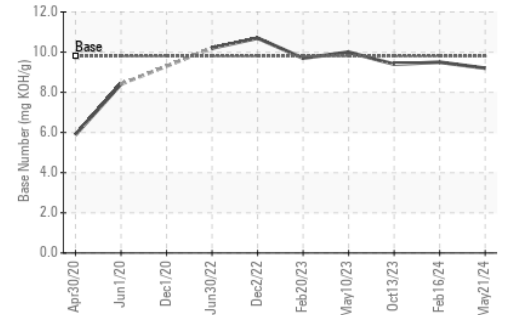

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0122792
 Lab Number : 06190243
 Unique Number : 11046995
 Test Package : FLEET

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: