


# PROBLEM SUMMARY

Area  
**(89683X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A69104**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**




Sample Rating Trend

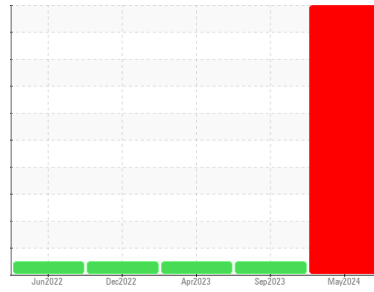

**GLYCOL**



## COMPONENT CONDITION SUMMARY

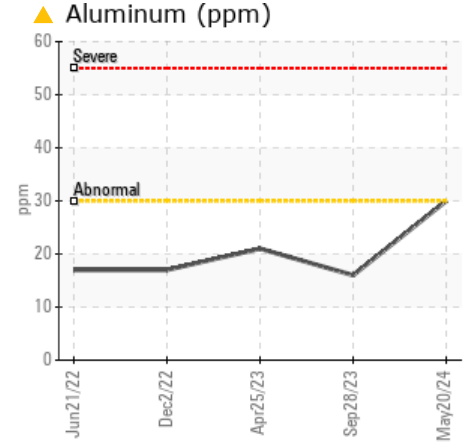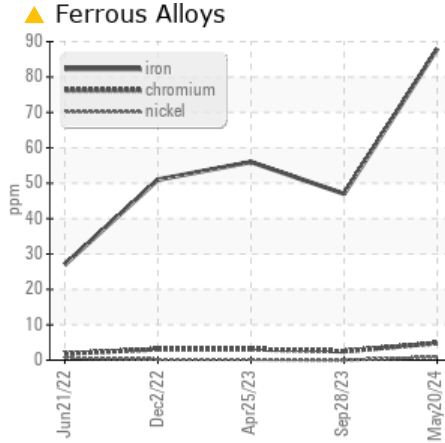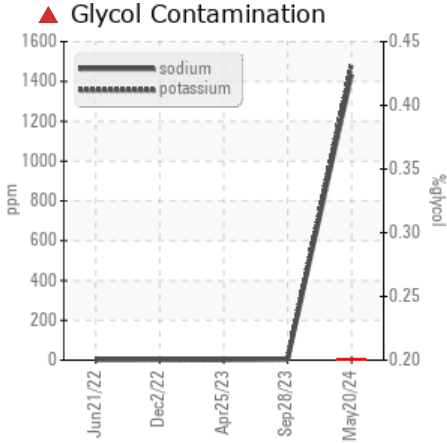

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Iron	ppm	ASTM D5185m	>80	▲ <b>88</b>	47	56
Aluminum	ppm	ASTM D5185m	>30	▲ <b>30</b>	16	21
Sodium	ppm	ASTM D5185m		▲ <b>1433</b>	4	1
Potassium	ppm	ASTM D5185m	>20	▲ <b>1488</b>	6	5
Glycol	%	*ASTM D2982		▲ <b>0.20</b>	NEG	NEG

**Customer Id:** TSV1373  
**Sample No.:** PCA0123360  
**Lab Number:** 06190318  
**Test Package:** FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

## HISTORICAL DIAGNOSIS

NORMAL



### 28 Sep 2023 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



NORMAL



### 25 Apr 2023 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



NORMAL



### 02 Dec 2022 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report



# OIL ANALYSIS REPORT

Area  
**(89683X) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A69104**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

Sample Rating Trend

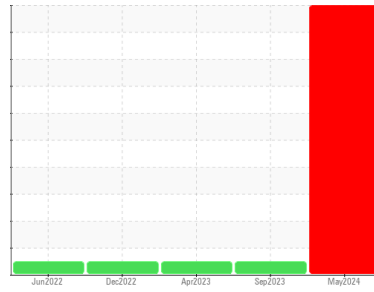

**GLYCOL**



## DIAGNOSIS

### ▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### ▲ Wear

Piston and cylinder wear is indicated.

### ▲ Contamination

Sodium and/or potassium levels are high. There is a high concentration of glycol present in the oil.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0123360</b>	PCA0106168	PCA0095128
Sample Date	Client Info			<b>20 May 2024</b>	28 Sep 2023	25 Apr 2023
Machine Age	mls	Client Info		<b>728191</b>	660694	604459
Oil Age	mls	Client Info		<b>67497</b>	56235	61616
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>SEVERE</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>▲ 88</b>	47	56
Chromium	ppm	ASTM D5185m	>5	<b>5</b>	2	3
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>30	<b>▲ 30</b>	16	21
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>11</b>	8	9
Tin	ppm	ASTM D5185m	>5	<b>2</b>	1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>4</b>	5	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	50	<b>131</b>	59	70
Manganese	ppm	ASTM D5185m	0	<b>3</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>815</b>	865	1081
Calcium	ppm	ASTM D5185m	1050	<b>1375</b>	1194	1246
Phosphorus	ppm	ASTM D5185m	995	<b>816</b>	1008	1084
Zinc	ppm	ASTM D5185m	1180	<b>1283</b>	1247	1358
Sulfur	ppm	ASTM D5185m	2600	<b>3150</b>	2516	3010


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>19</b>	12	11
Sodium	ppm	ASTM D5185m		<b>▲ 1433</b>	4	1
Potassium	ppm	ASTM D5185m	>20	<b>▲ 1488</b>	6	5
Glycol	%	*ASTM D2982		<b>▲ 0.20</b>	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.3</b>	1.4	1.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>15.8</b>	11.7	10.2
Sulfation	Abs.1mm	*ASTM D7415	>30	<b>29.8</b>	25.7	22.1


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs.1mm	*ASTM D7414	>25	<b>25.2</b>	21.2	18.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.9</b>	4.4	4.6

# OIL ANALYSIS REPORT


## ▲ Glycol Contamination

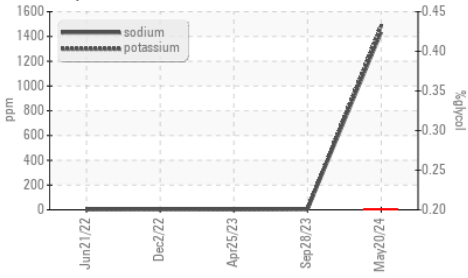


## ▲ Aluminum (ppm)

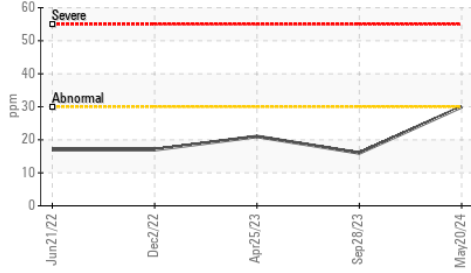


## ▲ FT-IR (Direct Trend)

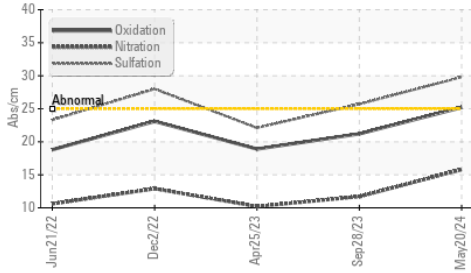

## ▲ FT-IR (Direct Trend)

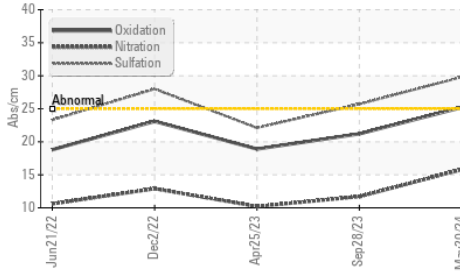

## ▲ Base Number

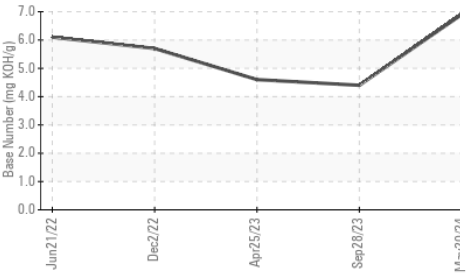

## VISUAL


method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG
Free Water	scalar *Visual		NEG	NEG

## FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	12.00	12.4	12.1

## GRAPHS


### ▲ Ferrous Alloys

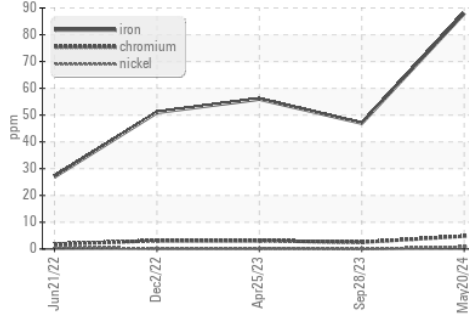


### ▲ Non-ferrous Metals

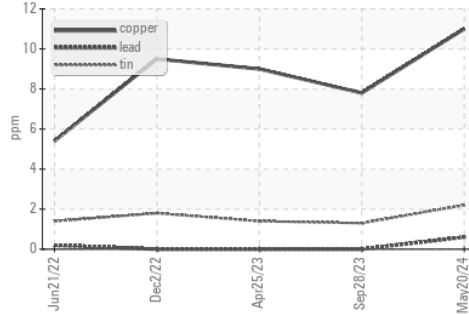

### ▲ Viscosity @ 100°C

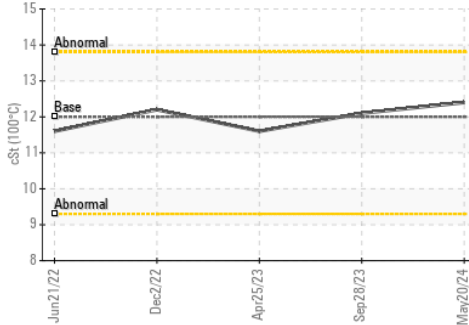

### ▲ Base Number

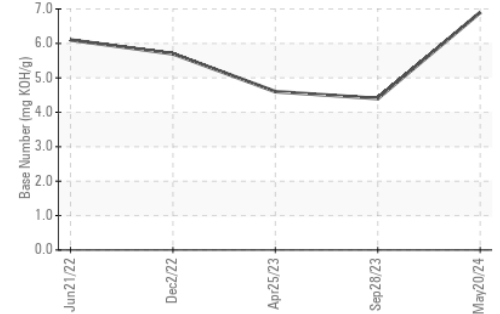

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : PCA0123360

**Lab Number** : 06190318

**Unique Number** : 11047070

**Test Package** : FLEET ( Additional Tests: Glycol )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**Received** : 24 May 2024

**Tested** : 30 May 2024

**Diagnosed** : 30 May 2024 - Jonathan Hester

Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass

101 Alliance Parkway

Williamston, SC

US 29697

Contact: Sonny Boucher

sboucher@transervice.com

T: (864)226-2304

F: (864)226-2329