




OIL ANALYSIS REPORT

Sample Rating Trend

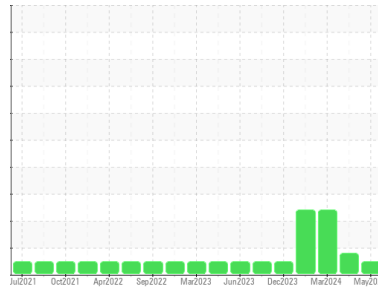

NORMAL



Machine Id
729071-30
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0058065	GFL0070949	GFL0058059
Sample Date	Client Info	22 May 2024	01 Apr 2024	25 Mar 2024
Machine Age	hrs	12061	11862	11796
Oil Age	hrs	600	30	600
Oil Changed	Client Info	Changed	Not Changd	Changed
Sample Status		NORMAL	MARGINAL	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	▲ 1.9	▲ 8.4
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	14	6	29
Chromium	ppm ASTM D5185m >20	<1	<1	1
Nickel	ppm ASTM D5185m >2	0	0	<1
Titanium	ppm ASTM D5185m >2	<1	0	<1
Silver	ppm ASTM D5185m >2	<1	0	0
Aluminum	ppm ASTM D5185m >20	10	3	13
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	<1	0	1
Tin	ppm ASTM D5185m >15	0	<1	2
Vanadium	ppm ASTM D5185m	<1	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	1	<1
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	58	59	54
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	980	1025	881
Calcium	ppm ASTM D5185m 1070	1067	1113	973
Phosphorus	ppm ASTM D5185m 1150	1055	1103	896
Zinc	ppm ASTM D5185m 1270	1239	1350	1122
Sulfur	ppm ASTM D5185m 2060	3610	4093	3259

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	2	5
Sodium	ppm ASTM D5185m	5	2	8
Potassium	ppm ASTM D5185m >20	21	5	26

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.4	0.1	0.6
Nitration	Abs/cm *ASTM D7624 >20	8.7	5.9	12.0
Sulfation	Abs/.1mm *ASTM D7415 >30	19.4	18.0	21.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.3	14.4	22.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.5	8.9	5.3







OIL ANALYSIS REPORT

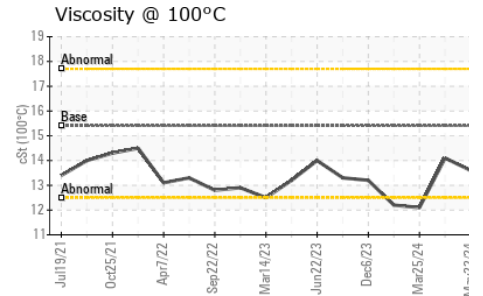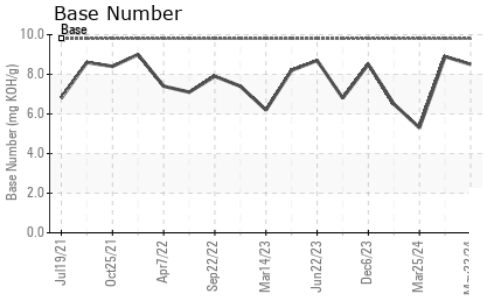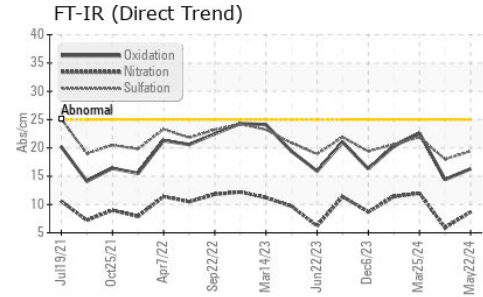

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	14.1 ▲ 12.1

GRAPHS

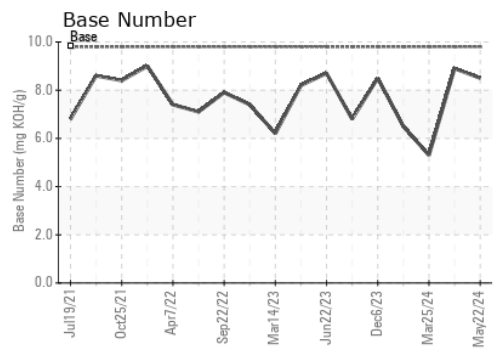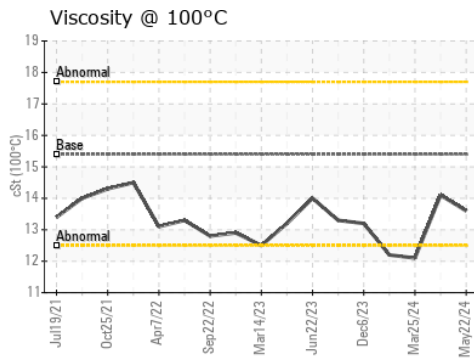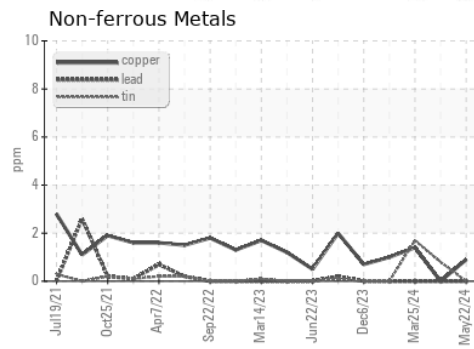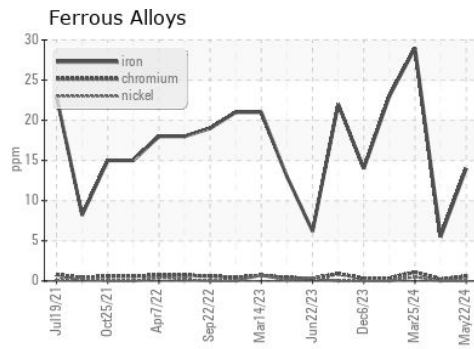

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0058065 **Received** : 24 May 2024
Lab Number : 06191433 **Tested** : 29 May 2024
Unique Number : 11048185 **Diagnosed** : 29 May 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 683 - Ruckersville Hauling
 261 INDUSTRIAL DR
 Ruckersville, VA
 US 22698
 Contact: Jaf Finney
 jfinney@gflenv.com
 T: (434)990-4972
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)