




# OIL ANALYSIS REPORT



Area  
**GFL035**  
 Machine Id  
**834036**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (42 QTS)**

Sample Rating Trend

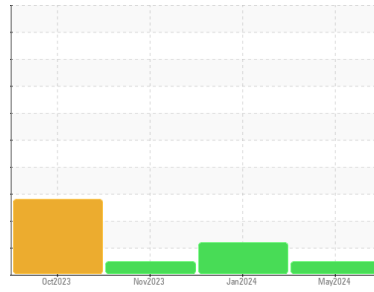

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0116489</b>	GFL0102339	GFL0102296
Sample Date	Client Info		<b>22 May 2024</b>	26 Jan 2024	17 Nov 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>600</b>	600	300
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>19</b>	32	23
Chromium	ppm	ASTM D5185m >20	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	5	3
Lead	ppm	ASTM D5185m >40	<b>2</b>	2	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	5	5
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	5	34
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	60	74
Manganese	ppm	ASTM D5185m 0	<b>1</b>	4	3
Magnesium	ppm	ASTM D5185m 1010	<b>641</b>	662	817
Calcium	ppm	ASTM D5185m 1070	<b>1921</b>	1670	2161
Phosphorus	ppm	ASTM D5185m 1150	<b>821</b>	815	1075
Zinc	ppm	ASTM D5185m 1270	<b>1064</b>	1031	1322
Sulfur	ppm	ASTM D5185m 2060	<b>2934</b>	2367	3509

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	10	11
Sodium	ppm	ASTM D5185m	<b>10</b>	11	9
Potassium	ppm	ASTM D5185m >20	<b>6</b>	8	4

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0</b>	0	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.2</b>	13.4	10.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.4</b>	27.2	21.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.3</b>	23.1	19.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>3.7</b>	▲ 2.7	5.5




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

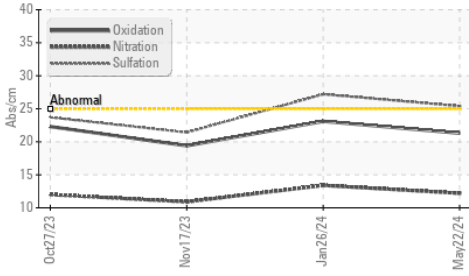

Base Number

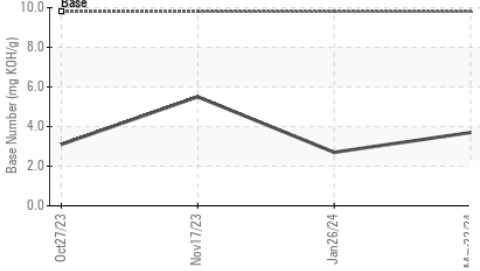

Viscosity @ 100°C

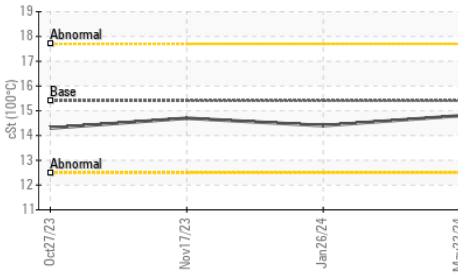


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.8	14.4

## GRAPHS


Ferrous Alloys

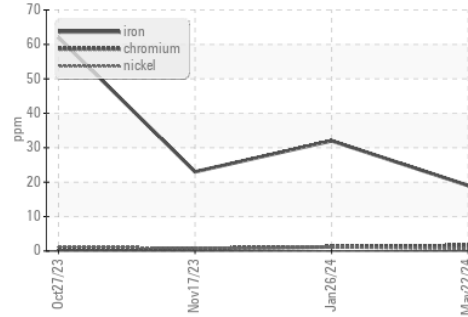


Non-ferrous Metals

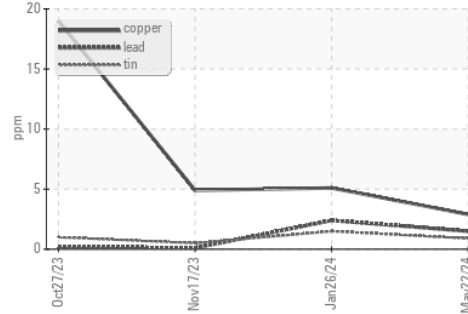

Viscosity @ 100°C

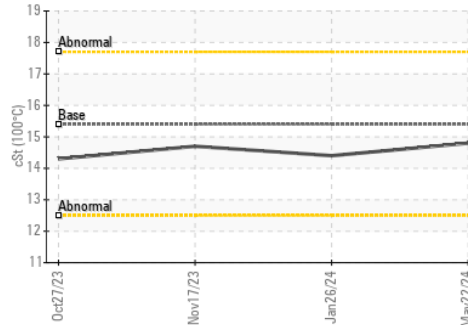

Base Number

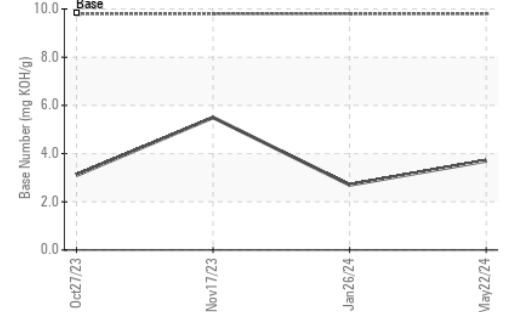

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116489  
**Lab Number** : 06191465  
**Unique Number** : 11048217  
**Test Package** : FLEET

**Received** : 24 May 2024  
**Tested** : 29 May 2024  
**Diagnosed** : 29 May 2024 - Angela Borella

**GFL Environmental - 035 - Greensboro**  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)