




# OIL ANALYSIS REPORT

Sample Rating Trend

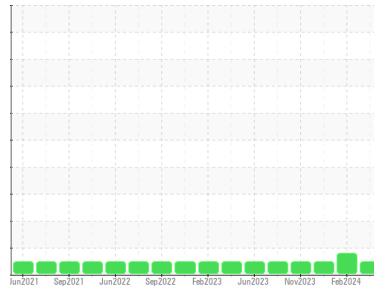

**NORMAL**



Machine Id  
**728054-10**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0070921</b>	GFL0058088	GFL0100166
Sample Date	Client Info		<b>23 May 2024</b>	20 Feb 2024	27 Nov 2023
Machine Age	hrs	Client Info	<b>13440</b>	12622	12622
Oil Age	hrs	Client Info	<b>276</b>	12622	44
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>26</b>	▲ 125	33
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>4</b>	4	2
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >150	<b>1</b>	4	2
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>58</b>	3	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 60	<b>72</b>	78	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>219</b>	1211	955
Calcium	ppm	ASTM D5185m 1070	<b>2078</b>	1254	1075
Phosphorus	ppm	ASTM D5185m 1150	<b>1044</b>	1148	1049
Zinc	ppm	ASTM D5185m 1270	<b>1240</b>	1574	1268
Sulfur	ppm	ASTM D5185m 2060	<b>4168</b>	3734	2835

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>12</b>	10	7
Sodium	ppm	ASTM D5185m	<b>6</b>	5	9
Potassium	ppm	ASTM D5185m >20	<b>4</b>	7	<1

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.7	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.4</b>	10.4	10.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.0</b>	20.7	21.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.7</b>	18.2	19.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.8</b>	7.2	6.8







# OIL ANALYSIS REPORT

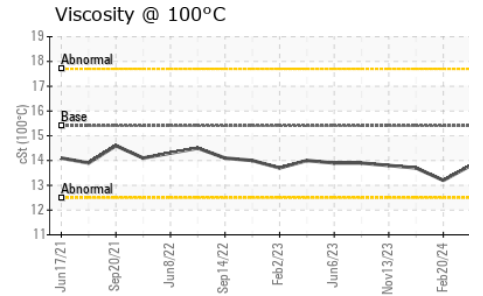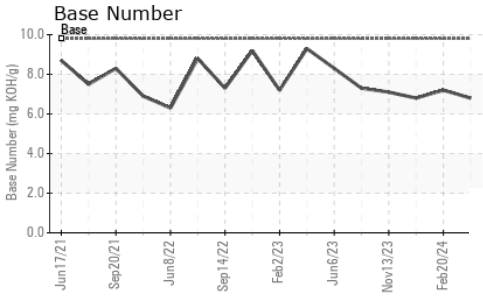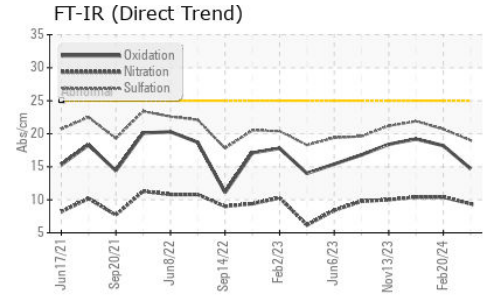

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.2	13.7

## GRAPHS

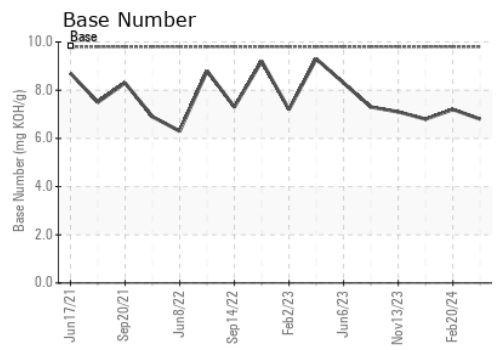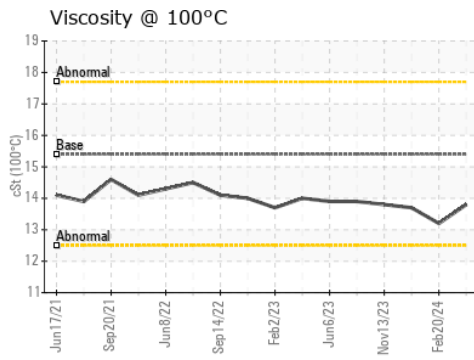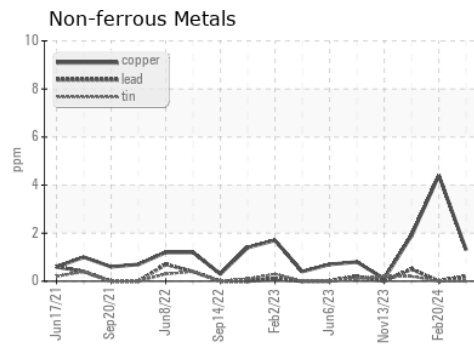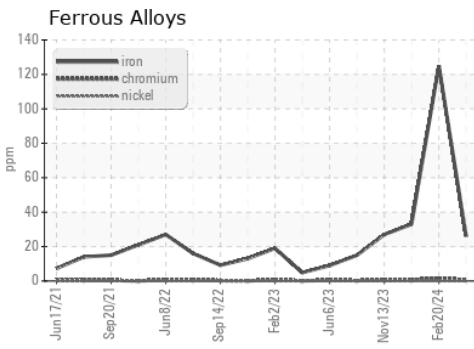

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0070921      **Received** : 24 May 2024  
**Lab Number** : **06191504**      **Tested** : 29 May 2024  
**Unique Number** : 11048256      **Diagnosed** : 29 May 2024 - Angela Borella  
**Test Package** : FLEET

**GFL Environmental - 657 - Charlottesville Hauling**  
 5498 Richmond Road  
 Troy, VA  
 US 22974  
 Contact: Brian Ulickas  
 bulickas@gflenv.com

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)