


OIL ANALYSIS REPORT

DODT







Machine Id 346674 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

QTS)			Nov2023	Apr2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0079271	PCA0110207	
Sample Date		Client Info		21 Apr 2024	30 Nov 2023	
Machine Age	mls	Client Info		50036	24622	
Oil Age	mls	Client Info		65000	24622	
Oil Changed		Client Info		N/A	Not Changd	
Sample Status				NORMAL	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	161	119	
Chromium	ppm	ASTM D5185m	>20	4	2	
Nickel	ppm	ASTM D5185m	>4	<1	<1	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>3	0	0	
Aluminum	ppm	ASTM D5185m	>20	51	33	
Lead	ppm	ASTM D5185m	>40	0	0	
Copper	ppm	ASTM D5185m	>330	46	49	
Tin	ppm	ASTM D5185m	>15	6	5	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	19	29	
Barium	ppm	ASTM D5185m	0	0	<1	
Molybdenum	ppm	ASTM D5185m	50	51	44	
Manganese	ppm	ASTM D5185m	0	9	9	
Magnesium	ppm	ASTM D5185m	950	679	535	
Calcium	ppm	ASTM D5185m	1050	1728	1727	
Phosphorus	ppm	ASTM D5185m	995	837	790	
Zinc	ppm	ASTM D5185m	1180	1072	969	
Sulfur	ppm	ASTM D5185m	2600	2534	2155	
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	42	13	
Sodium	ppm	ASTM D5185m		8	8	
Potassium	ppm	ASTM D5185m	>20	94	63	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.1	0.7	
Nitration	Abs/cm	*ASTM D7624	>20	14.0	11.2	
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.7	23.4	
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.4	23.8	
Base Number (BN)	mg KOH/g	ASTM D2896		7.1	8.7	



OIL ANALYSIS REPORT

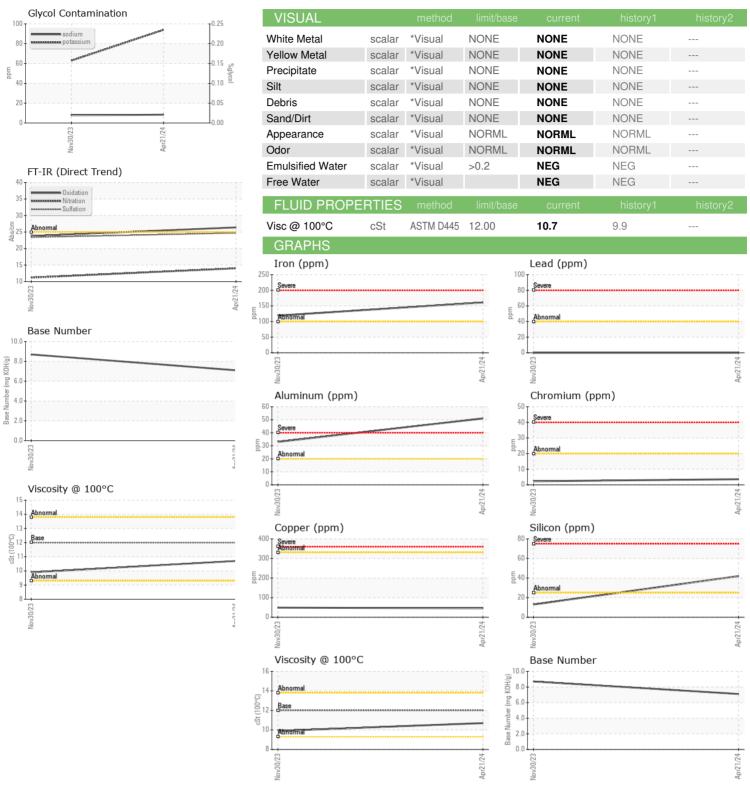





Certificate 12367

Laboratory Sample No.

Lab Number : 06191608

: PCA0079271 Unique Number : 11048360

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 24 May 2024 **Tested**

: 29 May 2024 Diagnosed : 29 May 2024 - Angela Borella

Test Package : MOB 1 (Additional Tests: TBN) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MILLER TRUCK LEASING #121

107 HOW LANE NEW BRUNSWICK, NJ US 08901

Contact: Anthony Cursi acursi@millertransgroup.com

T: (732)358-4027 F: (732)400-8475

Report Id: MILNEW [WUSCAR] 06191608 (Generated: 05/29/2024 19:22:22) Rev: 1

Contact/Location: Anthony Cursi - MILNEW