


OIL ANALYSIS REPORT



(P875192) YARD UNIT/STORAGE TRAILER 834042

Natural Gas Engine

PETRO CANADA DURON GEO LD 15W40 (28 QTS)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


| GEO LD 15W40 (28 | 0 Q13) | | | May2024 | | |
|--|--|--|--|---|--------------------------|--------------------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | GFL0109579 | | |
| Sample Date | | Client Info | | 23 May 2024 | | |
| Machine Age | hrs | Client Info | | 974 | | |
| Oil Age | hrs | Client Info | | 974 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATI | ON | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | 5 | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 50 | | |
| Chromium | ppm | ASTM D5185m | >4 | 1 | | |
| Nickel | ppm | ASTM D5185m | >2 | <1 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | >3 | <1 | | |
| Aluminum | ppm | ASTM D5185m | >9 | 5 | | |
| Lead | ppm | ASTM D5185m | >30 | 3 | | |
| Copper | ppm | ASTM D5185m | >35 | 15 | | |
| Tin | ppm | ASTM D5185m | >4 | 2 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 50 | 10 | | |
| Barium | | | | <1 | | |
| Danum | ppm | ASTM D5185m | 5 | < 1 | | |
| Molybdenum | ppm ppm | ASTM D5185m ASTM D5185m | 50 | 63 | | |
| | | | | | | |
| Molybdenum | ppm | ASTM D5185m | 50 | 63 | | |
| Molybdenum Manganese | ppm | ASTM D5185m ASTM D5185m | 50 | 63 10 | | |
| Molybdenum Manganese Magnesium | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | 50 0 560 | 63 10 827 | | |
| Molybdenum Manganese Magnesium Calcium | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 50 0 560 1510 | 63 10 827 1533 | | |
| Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 50 0 560 1510 780 | 63 10 827 1533 848 | | |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 50 0 560 1510 780 870 | 63 10 827 1533 848 1069 | | |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 50 0 560 1510 780 870 2040 | 63 10 827 1533 848 1069 2726 | | |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 50 0 560 1510 780 870 2040 | 63 10 827 1533 848 1069 2726 | | |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m | 50 0 560 1510 780 870 2040 limit/base >+100 | 63 10 827 1533 848 1069 2726 current | history1 | history2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 50 0 560 1510 780 870 2040 limit/base >+100 | 63 10 827 1533 848 1069 2726 current 17 | history1 | history2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 50 0 560 1510 780 870 2040 limit/base >+100 | 63 10 827 1533 848 1069 2726 current 17 10 | history1 | history2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 50 0 560 1510 780 870 2040 limit/base >+100 >20 | 63 10 827 1533 848 1069 2726 current 17 10 14 | history1 history1 | history2 history2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 50 0 560 1510 780 870 2040 limit/base >+100 >20 | 63 10 827 1533 848 1069 2726 current 17 10 14 current | history1 history1 | history2 history2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m | 50 0 560 1510 780 870 2040 limit/base >+100 >20 | 63 10 827 1533 848 1069 2726 current 17 10 14 current 0.1 | history1 history1 | history2 history2 |
| Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m Method ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7415 | 50 0 560 1510 780 870 2040 limit/base >+100 >20 limit/base | 63 10 827 1533 848 1069 2726 current 17 10 14 current 0.1 12.7 25.6 | history1 history1 | history2 history2 |

3.8

Base Number (BN) mg KOH/g ASTM D2896 10.2



OIL ANALYSIS REPORT

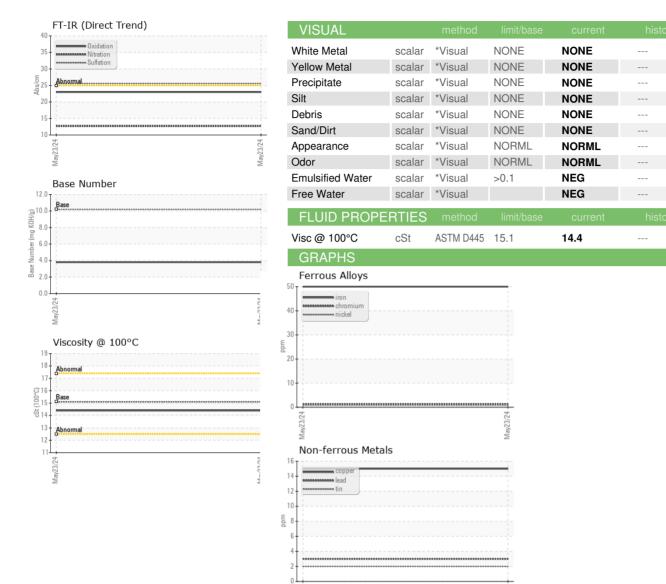





Laboratory Sample No. Lab Number : 06191646 Unique Number : 11048398

() () () () () () ₹ 14

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : GFL0109579 Received

Viscosity @ 100°C

Tested Diagnosed GFL Environmental - 031 - Greenville/Spartanburg

Base Number

(mg K0H/g)

0.0

: 24 May 2024

: 29 May 2024

: 29 May 2024 - Wes Davis

1635 Antioch Church Rd Piedmont, SC US 29673

Test Package : FLEET Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

catherine.anastasio@wearcheck.com T:

Contact: TECHNICIAN ACCOUNT

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: