




# OIL ANALYSIS REPORT

## Sample Rating Trend

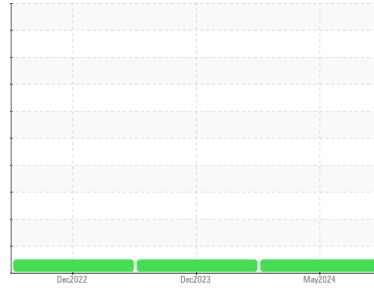

**NORMAL**



Machine Id

**727144**

Component

**Diesel Engine**

Fluid

**DISEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0123934</b>	GFL0098437	GFL0058704
Sample Date	Client Info		<b>20 May 2024</b>	20 Dec 2023	26 Dec 2022
Machine Age	hrs	Client Info	<b>28513</b>	27909	25205
Oil Age	hrs	Client Info	<b>28513</b>	27909	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	13	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	<1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>2</b>	2	95
Barium	ppm	ASTM D5185m 10	<b>0</b>	8	1
Molybdenum	ppm	ASTM D5185m 100	<b>63</b>	66	60
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>1041</b>	1027	923
Calcium	ppm	ASTM D5185m 3000	<b>1125</b>	1135	1073
Phosphorus	ppm	ASTM D5185m 1150	<b>1121</b>	996	1016
Zinc	ppm	ASTM D5185m 1350	<b>1342</b>	1275	1188
Sulfur	ppm	ASTM D5185m 4250	<b>3531</b>	3180	3908

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	6	9
Sodium	ppm	ASTM D5185m >158	<b>3</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	1

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	7.4	5.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	19.4	18.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.0</b>	16.2	14.1
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.6</b>	8.4	9.1







# OIL ANALYSIS REPORT

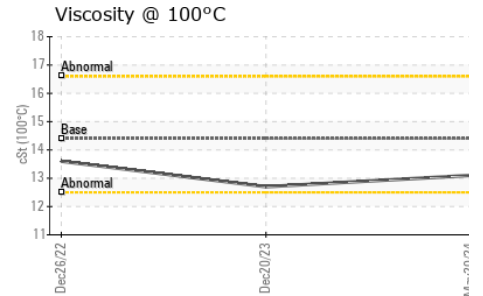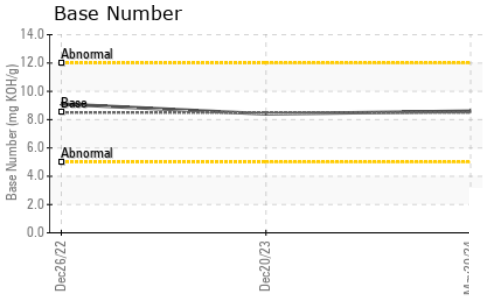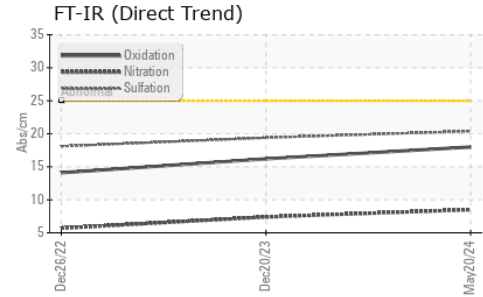

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.1</b>	12.7	13.6

## GRAPHS

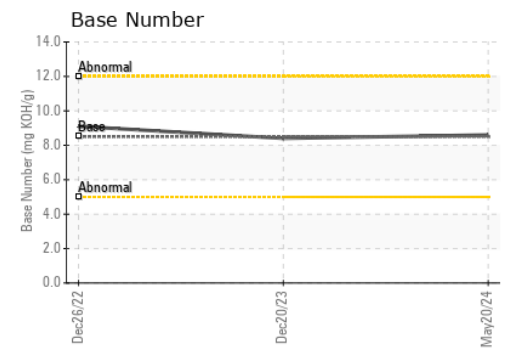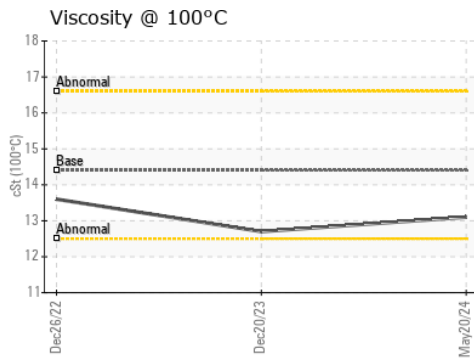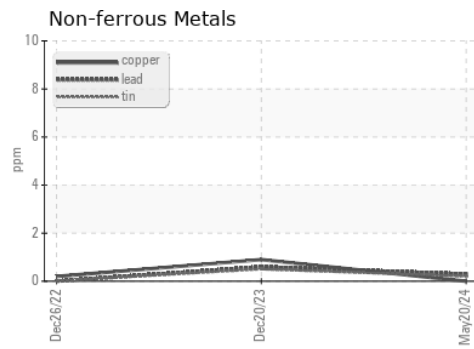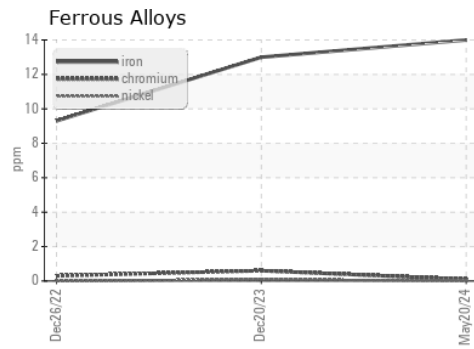

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123934      **Received** : 24 May 2024  
**Lab Number** : **06191653**      **Tested** : 29 May 2024  
**Unique Number** : 11048405      **Diagnosed** : 29 May 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 918 - Hartland WI**  
 630 E Industrial Drive  
 Hartland, WI  
 US 53029

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)