




# OIL ANALYSIS REPORT

Sample Rating Trend

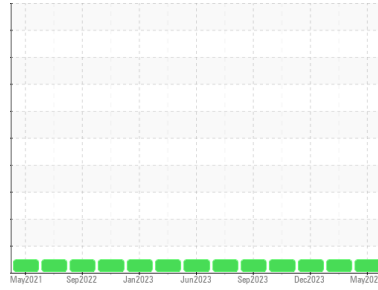

**NORMAL**



Machine Id  
**928030-1190**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Sample only )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0116299</b>	GFL0101612	GFL0094871
Sample Date	Client Info		<b>21 May 2024</b>	07 Mar 2024	28 Dec 2023
Machine Age	hrs	Client Info	<b>13066</b>	12736	12288
Oil Age	hrs	Client Info	<b>336</b>	448	580
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>4</b>	5	9
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	1	7
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	5
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>0</b>	<1	1
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>25</b>	6	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	60	58
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	1
Magnesium	ppm	ASTM D5185m 1010	<b>735</b>	976	891
Calcium	ppm	ASTM D5185m 1070	<b>1283</b>	1100	1023
Phosphorus	ppm	ASTM D5185m 1150	<b>1024</b>	1029	941
Zinc	ppm	ASTM D5185m 1270	<b>1204</b>	1266	1192
Sulfur	ppm	ASTM D5185m 2060	<b>3562</b>	3600	2613

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	5
Sodium	ppm	ASTM D5185m	<b>2</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	7

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.1</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.8</b>	5.8	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.0</b>	17.5	19.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.7</b>	13.4	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.6</b>	7.4	7.0







# OIL ANALYSIS REPORT

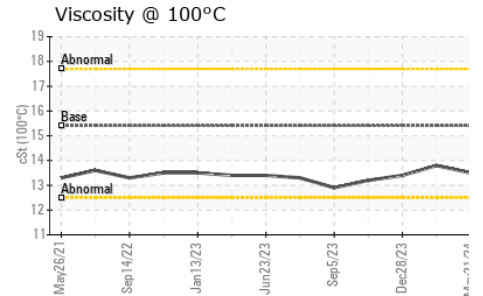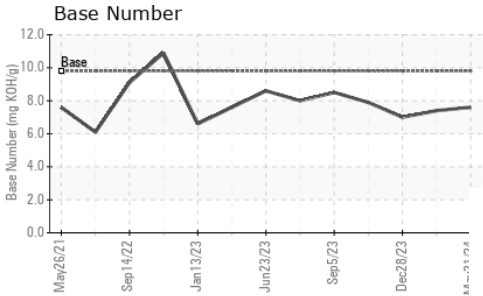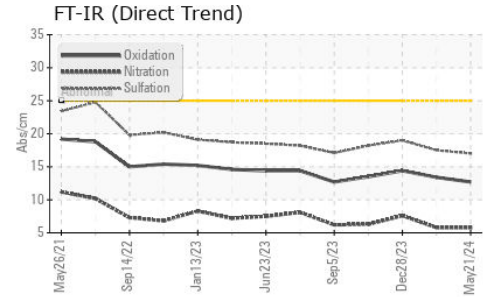

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.8

## GRAPHS

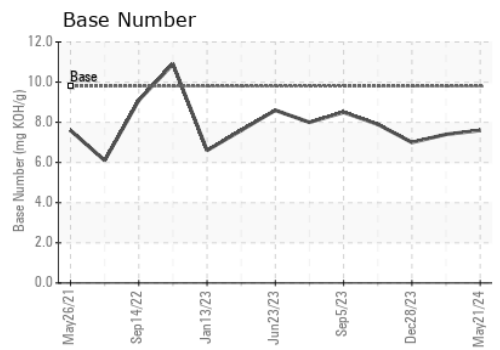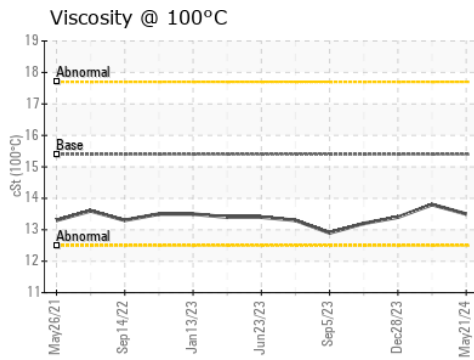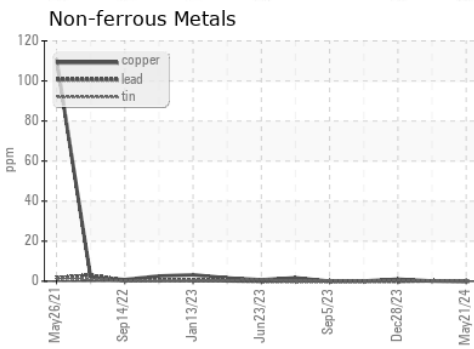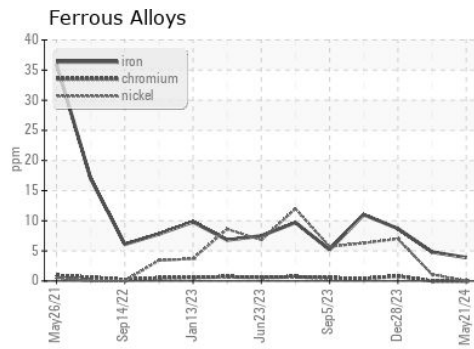

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116299      **Received** : 24 May 2024  
**Lab Number** : 06191701      **Tested** : 29 May 2024  
**Unique Number** : 11048453      **Diagnosed** : 29 May 2024 - Angela Borella  
**Test Package** : FLEET

**GFL Environmental - 625 - Harrison Hauling**  
 2480 S Clare Ave  
 Clare, MI  
 US 48617  
 Contact: RON TROJANEK  
 ront@northern1.com  
 T: (231)624-0372  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)