




# OIL ANALYSIS REPORT

Sample Rating Trend

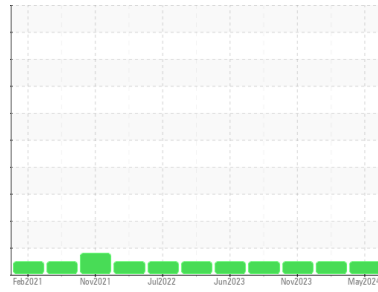

**NORMAL**



Area  
**(BB27195)**  
 Machine Id  
**528008-1107**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Sample only )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0116215</b>	GFL0094876	GFL0094847
Sample Date	Client Info		<b>21 May 2024</b>	04 Jan 2024	01 Nov 2023
Machine Age	hrs	Client Info	<b>15625</b>	14900	14551
Oil Age	hrs	Client Info	<b>727</b>	14420	483
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>49</b>	76	42
Chromium	ppm	ASTM D5185m >20	<b>1</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	15	10
Lead	ppm	ASTM D5185m >40	<b>2</b>	5	1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	4	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	5
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	66	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>992</b>	1016	869
Calcium	ppm	ASTM D5185m 1070	<b>1150</b>	1157	1042
Phosphorus	ppm	ASTM D5185m 1150	<b>1123</b>	1175	1014
Zinc	ppm	ASTM D5185m 1270	<b>1332</b>	1399	1163
Sulfur	ppm	ASTM D5185m 2060	<b>3138</b>	2911	3139

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	11	7
Sodium	ppm	ASTM D5185m	<b>5</b>	7	2
Potassium	ppm	ASTM D5185m >20	<b>4</b>	24	22

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	1	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.6</b>	11.5	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.8</b>	24.6	21.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.2</b>	20.6	17.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>4.9</b>	5.4	6.8







# OIL ANALYSIS REPORT

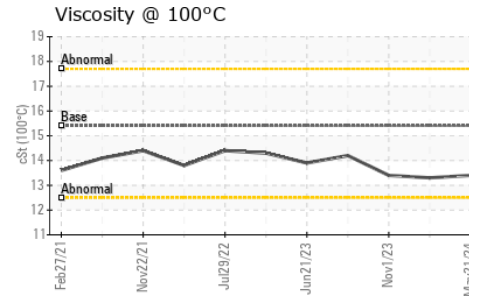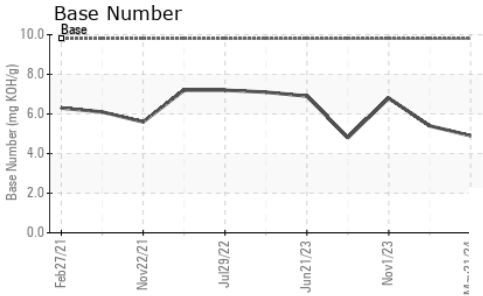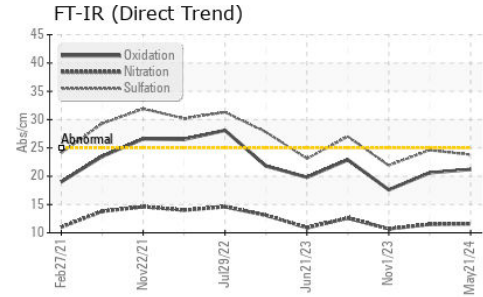

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.3	13.4

## GRAPHS

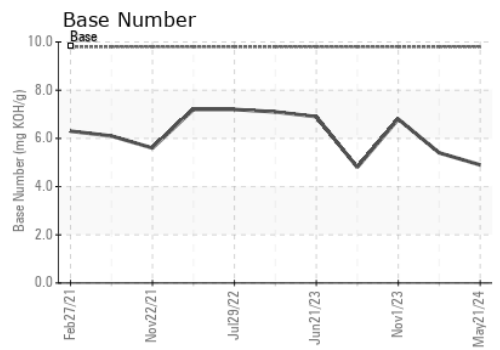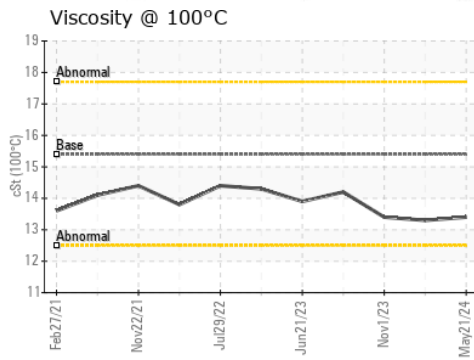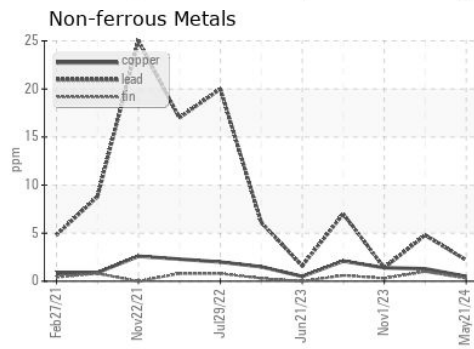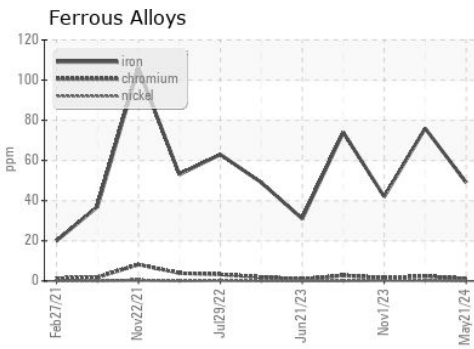

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116215      **Received** : 24 May 2024  
**Lab Number** : **06191722**      **Tested** : 29 May 2024  
**Unique Number** : 11048474      **Diagnosed** : 29 May 2024 - Angela Borella  
**Test Package** : FLEET

**GFL Environmental - 625 - Harrison Hauling**  
 2480 S Clare Ave  
 Clare, MI  
 US 48617  
 Contact: Glenda Standen  
 gstanden@gflenv.com

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)