




# OIL ANALYSIS REPORT

## Sample Rating Trend

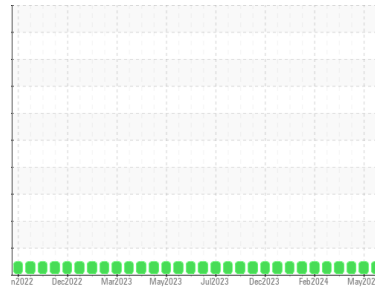

**NORMAL**



Area  
**MONTGOMERY**  
Machine Id  
**MACK 925034-152592**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0088022</b>	GFL0118433	GFL0118446
Sample Date	Client Info		<b>23 May 2024</b>	06 May 2024	17 Apr 2024
Machine Age	mls	Client Info	<b>24498</b>	24361	24221
Oil Age	mls	Client Info	<b>24498</b>	24361	2699
Oil Changed	Client Info		<b>Not Changed</b>	N/A	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>6</b>	5	2
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	<1
Lead	ppm	ASTM D5185m >40	<b>1</b>	1	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>1</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	54	54
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>963</b>	883	884
Calcium	ppm	ASTM D5185m 1070	<b>1082</b>	1007	1002
Phosphorus	ppm	ASTM D5185m 1150	<b>1038</b>	970	918
Zinc	ppm	ASTM D5185m 1270	<b>1250</b>	1166	1098
Sulfur	ppm	ASTM D5185m 2060	<b>3292</b>	3260	3294

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	5	3
Sodium	ppm	ASTM D5185m	<b>6</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3	0

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	6.7	5.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.1</b>	18.2	17.7


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.8</b>	14.4	13.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.0</b>	8.5	8.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

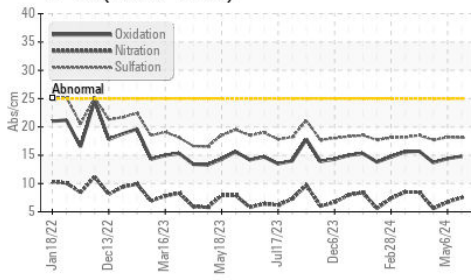

Base Number

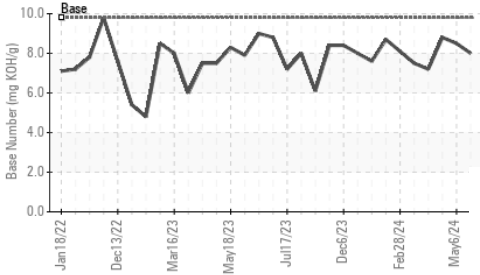

Viscosity @ 100°C

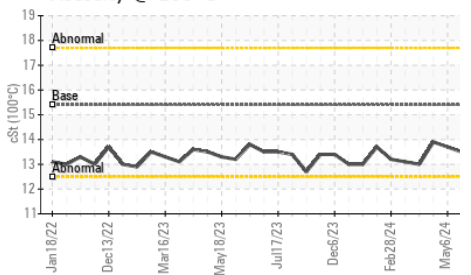


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.7

## GRAPHS


Ferrous Alloys

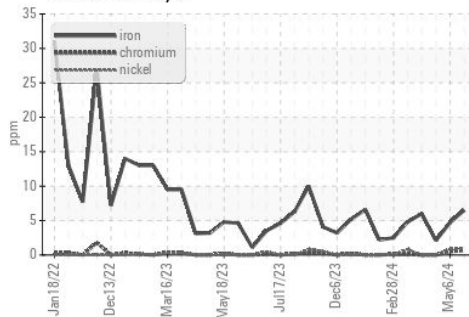


Non-ferrous Metals

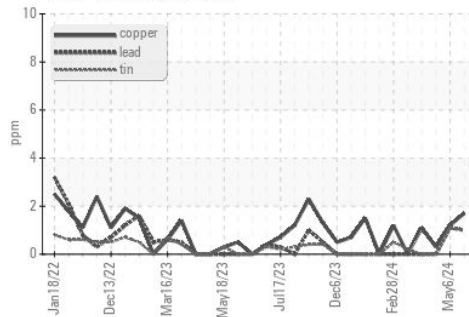

Viscosity @ 100°C

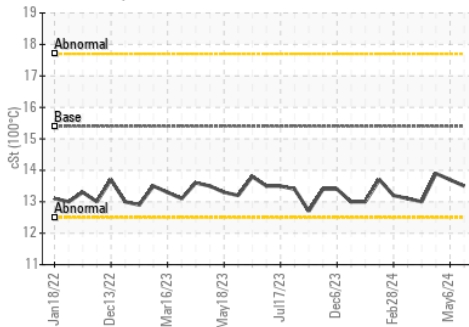

Base Number

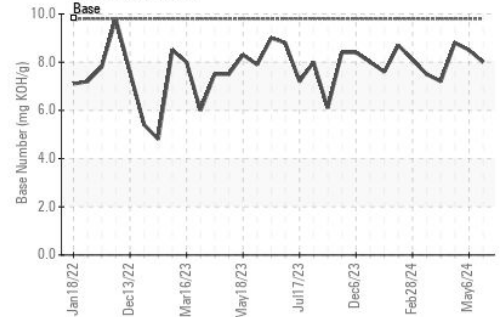

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0088022  
 Lab Number : 06191855  
 Unique Number : 11048607  
 Test Package : FLEET

Received : 28 May 2024  
 Tested : 29 May 2024  
 Diagnosed : 29 May 2024 - Wes Davis

GFL Environmental - 955 - Montgomery  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: