




# OIL ANALYSIS REPORT

Sample Rating Trend

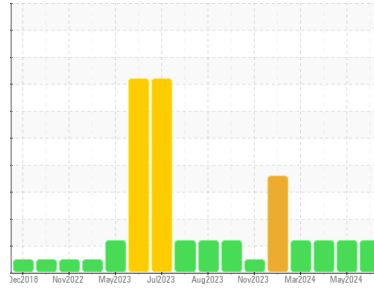

GLYCOL



Machine Id  
**727103-361675**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>GFL0104813</b>  | GFL0104804  | GFL0104976  |
| Sample Date        | Client Info |             |            | <b>17 May 2024</b> | 07 May 2024 | 12 Apr 2024 |
| Machine Age        | hrs         | Client Info |            | <b>9844</b>        | 10606       | 9844        |
| Oil Age            | hrs         | Client Info |            | <b>10076</b>       | 9728        | 9103        |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>ATTENTION</b>   | ATTENTION   | ATTENTION   |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>18</b>    | 15       | 6        |
| Chromium    | ppm | ASTM D5185m | >20        | <b>2</b>     | 1        | <1       |
| Nickel      | ppm | ASTM D5185m | >4         | <b>&lt;1</b> | 0        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >3         | <b>1</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>4</b>     | 2        | 1        |
| Lead        | ppm | ASTM D5185m | >40        | <b>&lt;1</b> | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >330       | <b>2</b>     | <1       | <1       |
| Tin         | ppm | ASTM D5185m | >15        | <b>&lt;1</b> | 0        | <1       |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 0          | <b>1</b>     | <1       | 0        |
| Barium     | ppm | ASTM D5185m | 0          | <b>1</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 60         | <b>83</b>    | 79       | 74       |
| Manganese  | ppm | ASTM D5185m | 0          | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m | 1010       | <b>967</b>   | 895      | 984      |
| Calcium    | ppm | ASTM D5185m | 1070       | <b>1088</b>  | 1003     | 1086     |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>1001</b>  | 967      | 1060     |
| Zinc       | ppm | ASTM D5185m | 1270       | <b>1237</b>  | 1192     | 1228     |
| Sulfur     | ppm | ASTM D5185m | 2060       | <b>3059</b>  | 3269     | 3705     |

| CONTAMINANTS |     | method      | limit/base | current    | history1 | history2 |
|--------------|-----|-------------|------------|------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>7</b>   | 5        | 3        |
| Sodium       | ppm | ASTM D5185m |            | <b>216</b> | 234      | 132      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>5</b>   | 2        | <1       |
| Glycol       | %   | *ASTM D2982 |            | <b>NEG</b> | NEG      | NEG      |


| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.4</b>  | 0.5      | 0.2      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>9.0</b>  | 9.4      | 6.2      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>20.3</b> | 20.7     | 18.2     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>16.4</b> | 16.9     | 13.9     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 9.8        | <b>8.2</b>  | 8.3      | 8.8      |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

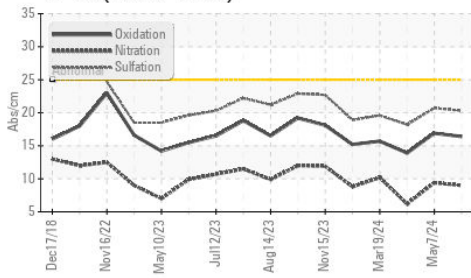


Glycol Contamination

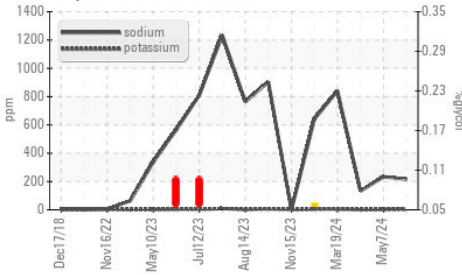

Viscosity @ 100°C

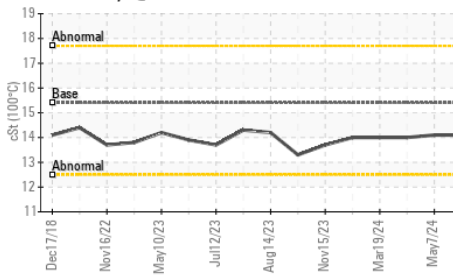

Glycol Contamination

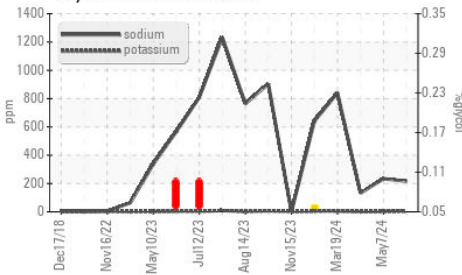


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 14.1     | 14.0     |

## GRAPHS


Ferrous Alloys

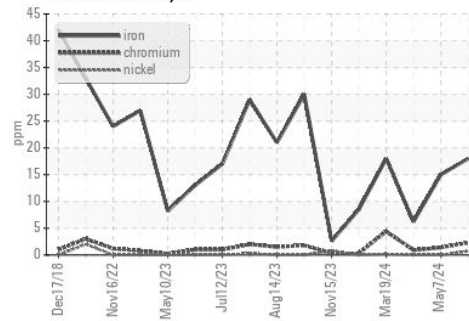


Non-ferrous Metals

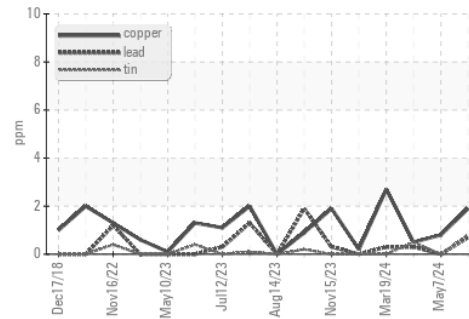

Viscosity @ 100°C

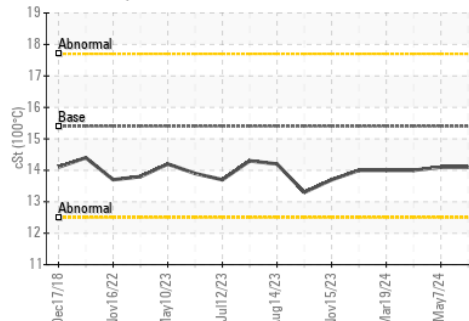

Base Number

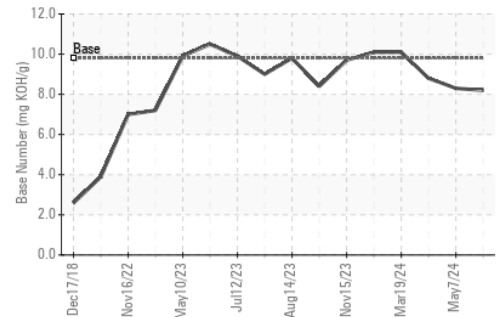

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104813  
**Lab Number** : 06191859  
**Unique Number** : 11048611  
**Test Package** : FLEET ( Additional Tests: Glycol )

**Received** : 28 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Sean Felton

**GFL Environmental - 820 - Joplin Hauling**  
 3700 West 7th Street  
 Joplin, MO  
 US 64801

Contact: James Jarrett  
 jjarrett@gflenv.com  
 T: (417)310-2802

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)