




OIL ANALYSIS REPORT

Sample Rating Trend

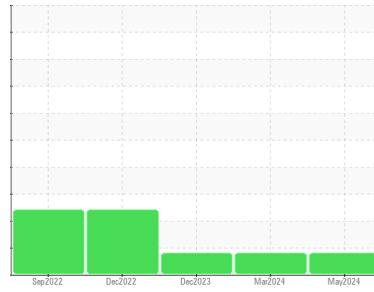

FUEL



Machine Id
923016
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0113970	GFL0113989	GFL0080364
Sample Date	Client Info	22 May 2024	12 Mar 2024	07 Dec 2023
Machine Age	hrs	22351	21974	21435
Oil Age	hrs	377	539	21435
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		MARGINAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>120	8	18	12
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	1	0	0
Aluminum	ppm	ASTM D5185m	>20	9	13	9
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	4	1	2
Tin	ppm	ASTM D5185m	>15	1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	1	0	1
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	60	58	55	60
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	1010	950	947	951
Calcium	ppm	ASTM D5185m	1070	1037	1056	1031
Phosphorus	ppm	ASTM D5185m	1150	1004	975	979
Zinc	ppm	ASTM D5185m	1270	1225	1217	1213
Sulfur	ppm	ASTM D5185m	2060	3264	3512	3101

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	5	4	6
Sodium	ppm	ASTM D5185m		3	3	35
Potassium	ppm	ASTM D5185m	>20	2	0	7
Fuel	%	ASTM D3524	>3.0	▲ 2.5	▲ 4.2	▲ 4.3

INFRA-RED





method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>4	0.2	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.3	10.2	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.9	18.7	19.7

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.6	15.8	17.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.3	6.6	6.3







OIL ANALYSIS REPORT

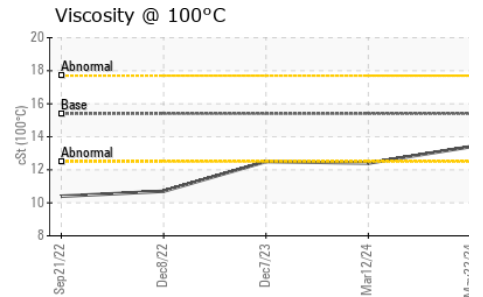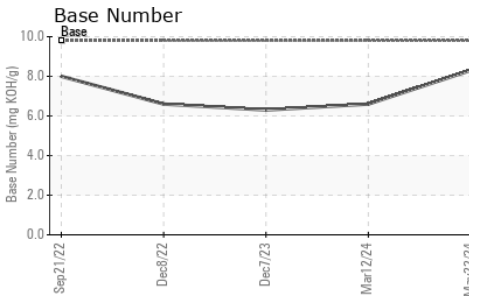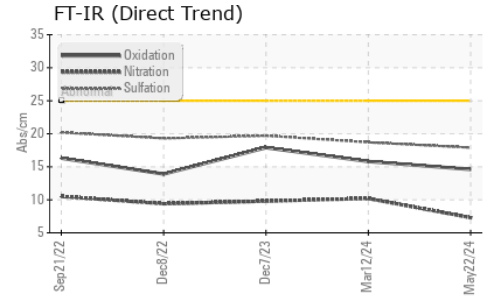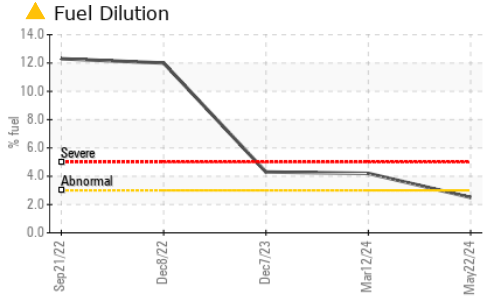

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	12.4	12.5

GRAPHS

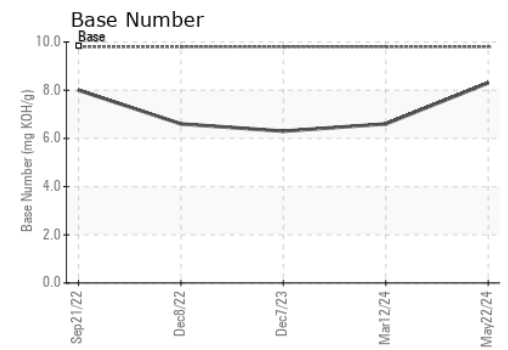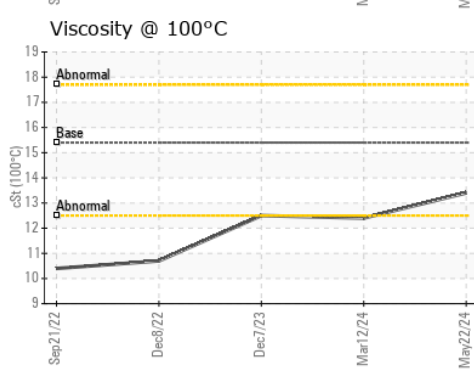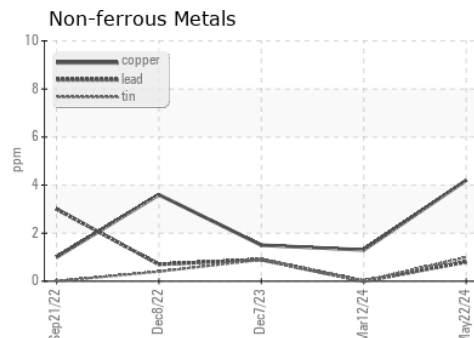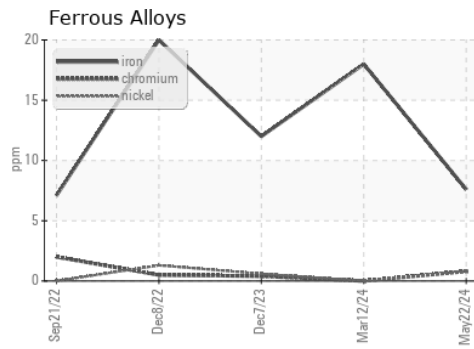

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0113970 **Received** : 28 May 2024
Lab Number : **06191870** **Tested** : 29 May 2024
Unique Number : 11048622 **Diagnosed** : 30 May 2024 - Sean Felton
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 932 - Muskego HC
 W144 S6400 College Ct.
 Muskego, WI
 US 53150
 Contact: Brian Schломann
 brian.schlomann@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)