




OIL ANALYSIS REPORT

Sample Rating Trend

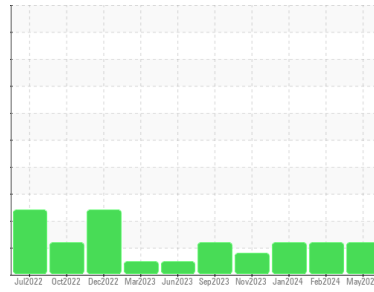

FUEL



Machine Id

722033

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0116023 | GFL0097505 | GFL0097481 |
| Sample Date | Client Info | | 22 May 2024 | 22 Feb 2024 | 03 Jan 2024 |
| Machine Age | hrs | Client Info | 17158 | 16594 | 16235 |
| Oil Age | hrs | Client Info | 13691 | 13691 | 13691 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ABNORMAL | ABNORMAL | ABNORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 32 | 25 | 30 |
| Chromium | ppm | ASTM D5185m >20 | 2 | 2 | 2 |
| Nickel | ppm | ASTM D5185m >4 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | <1 | <1 | 0 |
| Silver | ppm | ASTM D5185m >3 | 1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | 4 | <1 | <1 |
| Lead | ppm | ASTM D5185m >40 | 2 | 1 | 2 |
| Copper | ppm | ASTM D5185m >330 | 3 | 2 | 8 |
| Tin | ppm | ASTM D5185m >15 | 1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | <1 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | <1 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 6 | 6 | 7 |
| Barium | ppm | ASTM D5185m 0 | 1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 60 | 71 | 69 | 67 |
| Manganese | ppm | ASTM D5185m 0 | <1 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m 1010 | 1063 | 1038 | 1092 |
| Calcium | ppm | ASTM D5185m 1070 | 1209 | 1261 | 1340 |
| Phosphorus | ppm | ASTM D5185m 1150 | 1143 | 1098 | 1129 |
| Zinc | ppm | ASTM D5185m 1270 | 1384 | 1300 | 1500 |
| Sulfur | ppm | ASTM D5185m 2060 | 3222 | 3041 | 3019 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 6 | 3 | 6 |
| Sodium | ppm | ASTM D5185m | 7 | 7 | 6 |
| Potassium | ppm | ASTM D5185m >20 | 3 | 0 | <1 |
| Fuel | % | ASTM D3524 >2.0 | ▲ 3.8 | ▲ 4.1 | ▲ 4.2 |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.2 | 0.2 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 10.3 | 10.6 | 10.0 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 21.2 | 21.1 | 21.3 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 17.5 | 17.7 | 16.3 |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8 | 6.8 | 6.7 | 7.7 |




OIL ANALYSIS REPORT


Fuel Dilution

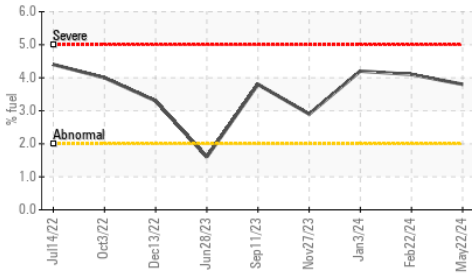


FT-IR (Direct Trend)

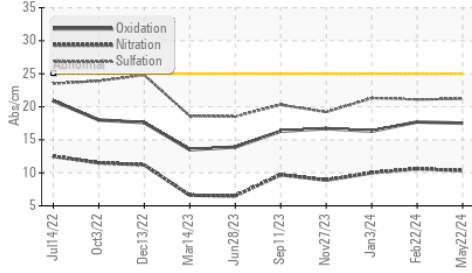

FT-IR (Direct Trend)

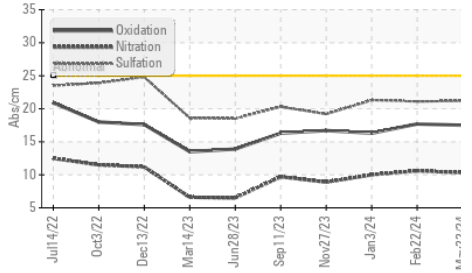

Base Number

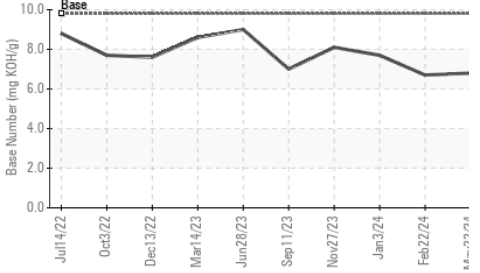


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ▲ 11.9 | ▲ 11.6 |

GRAPHS


Ferrous Alloys

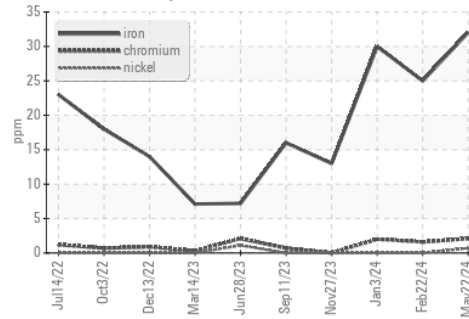


Non-ferrous Metals

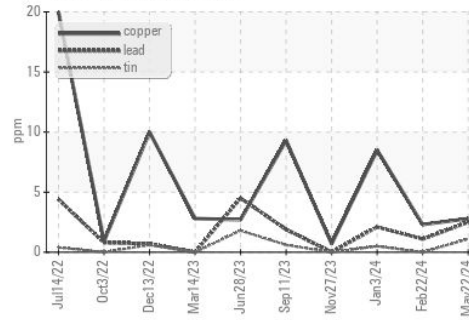

Viscosity @ 100°C

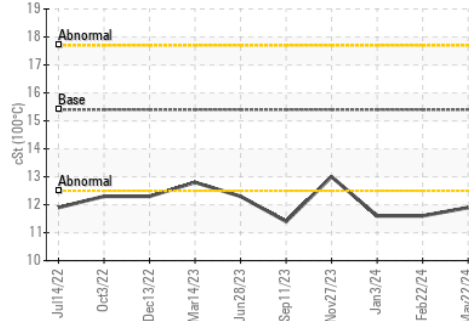

Base Number

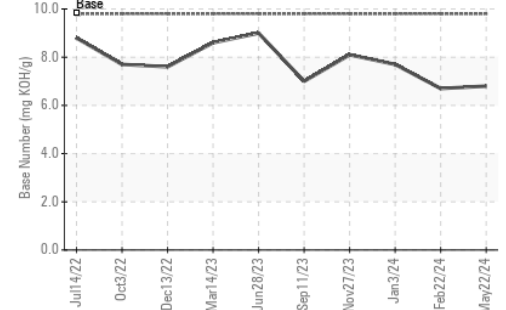

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0116023

Lab Number : 06191875

Unique Number : 11048627

Test Package : FLEET (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 28 May 2024

Tested : 29 May 2024

Diagnosed : 29 May 2024 - Wes Davis

GFL Environmental - 641 - Alpena

1241 KING SETTLEMENT RD

ALPENA, MI

US 49707

Contact: DYLAN TOLAN

dylan.tolan@gflenv.com

T: (989)854-7203

F: