




# OIL ANALYSIS REPORT

Sample Rating Trend

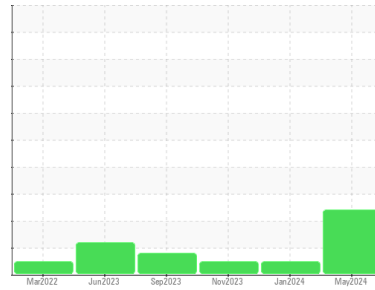

GLYCOL



Machine Id

**75M**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Check for low coolant level. We advise that you check the fuel injection system. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. There is a moderate amount of fuel present in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1     | history2    |      |
|---------------|-------------|--------------------|--------------|-------------|------|
| Sample Number | Client Info | <b>GFL0116071</b>  | GFL0092973   | GFL0092955  |      |
| Sample Date   | Client Info | <b>22 May 2024</b> | 05 Jan 2024  | 27 Nov 2023 |      |
| Machine Age   | hrs         | Client Info        | <b>10064</b> | 9854        | 9844 |
| Oil Age       | hrs         | Client Info        | <b>9535</b>  | 9535        | 9535 |
| Oil Changed   | Client Info | <b>N/A</b>         | N/A          | N/A         |      |
| Sample Status |             | <b>ABNORMAL</b>    | NORMAL       | NORMAL      |      |

## CONTAMINATION

| method | limit/base | current | history1   | history2 |     |
|--------|------------|---------|------------|----------|-----|
| Water  | WC Method  | >0.2    | <b>NEG</b> | NEG      | NEG |

## WEAR METALS

| method   | limit/base | current     | history1 | history2     |    |    |
|----------|------------|-------------|----------|--------------|----|----|
| Iron     | ppm        | ASTM D5185m | >100     | <b>36</b>    | 36 | 39 |
| Chromium | ppm        | ASTM D5185m | >20      | <b>1</b>     | <1 | <1 |
| Nickel   | ppm        | ASTM D5185m | >2       | <b>&lt;1</b> | 0  | 0  |
| Titanium | ppm        | ASTM D5185m | >2       | <b>&lt;1</b> | 0  | 0  |
| Silver   | ppm        | ASTM D5185m | >2       | <b>1</b>     | 0  | 0  |
| Aluminum | ppm        | ASTM D5185m | >25      | <b>11</b>    | 12 | 14 |
| Lead     | ppm        | ASTM D5185m | >40      | <b>&lt;1</b> | 0  | 0  |
| Copper   | ppm        | ASTM D5185m | >330     | <b>2</b>     | <1 | 1  |
| Tin      | ppm        | ASTM D5185m | >15      | <b>&lt;1</b> | 0  | 0  |
| Vanadium | ppm        | ASTM D5185m |          | <b>&lt;1</b> | 0  | 0  |
| Cadmium  | ppm        | ASTM D5185m |          | <b>&lt;1</b> | 0  | 0  |

## ADDITIVES

| method     | limit/base | current     | history1 | history2     |      |      |
|------------|------------|-------------|----------|--------------|------|------|
| Boron      | ppm        | ASTM D5185m | 0        | <b>5</b>     | 0    | 0    |
| Barium     | ppm        | ASTM D5185m | 0        | <b>&lt;1</b> | 0    | 0    |
| Molybdenum | ppm        | ASTM D5185m | 60       | <b>66</b>    | 57   | 63   |
| Manganese  | ppm        | ASTM D5185m | 0        | <b>&lt;1</b> | 0    | <1   |
| Magnesium  | ppm        | ASTM D5185m | 1010     | <b>910</b>   | 922  | 991  |
| Calcium    | ppm        | ASTM D5185m | 1070     | <b>1030</b>  | 990  | 1054 |
| Phosphorus | ppm        | ASTM D5185m | 1150     | <b>941</b>   | 924  | 1048 |
| Zinc       | ppm        | ASTM D5185m | 1270     | <b>1166</b>  | 1240 | 1265 |
| Sulfur     | ppm        | ASTM D5185m | 2060     | <b>2901</b>  | 2765 | 2956 |

## CONTAMINANTS

| method    | limit/base | current     | history1 | history2   |      |      |
|-----------|------------|-------------|----------|------------|------|------|
| Silicon   | ppm        | ASTM D5185m | >25      | <b>6</b>   | 3    | 4    |
| Sodium    | ppm        | ASTM D5185m |          | <b>84</b>  | 38   | 39   |
| Potassium | ppm        | ASTM D5185m | >20      | <b>26</b>  | 15   | 14   |
| Fuel      | %          | ASTM D3524  | >5       | <b>7.5</b> | <1.0 | <1.0 |
| Glycol    | %          | *ASTM D2982 |          | <b>NEG</b> | NEG  | NEG  |

## INFRA-RED






| method    | limit/base | current     | history1 | history2    |      |      |
|-----------|------------|-------------|----------|-------------|------|------|
| Soot %    | %          | *ASTM D7844 | >3       | <b>0.7</b>  | 0.9  | 0.9  |
| Nitration | Abs/cm     | *ASTM D7624 | >20      | <b>9.9</b>  | 11.1 | 10.8 |
| Sulfation | Abs/.1mm   | *ASTM D7415 | >30      | <b>18.8</b> | 20.3 | 20.2 |

## FLUID DEGRADATION

| method           | limit/base | current     | history1 | history2    |      |      |
|------------------|------------|-------------|----------|-------------|------|------|
| Oxidation        | Abs/.1mm   | *ASTM D7414 | >25      | <b>15.9</b> | 18.1 | 17.8 |
| Base Number (BN) | mg KOH/g   | ASTM D2896  | 9.8      | <b>8.5</b>  | 8.5  | 8.6  |







# OIL ANALYSIS REPORT

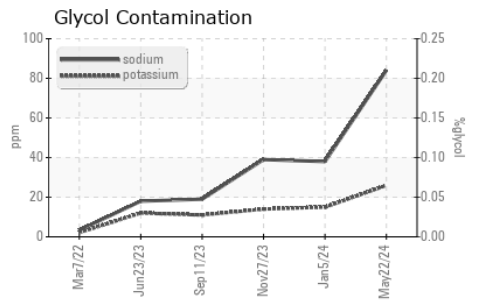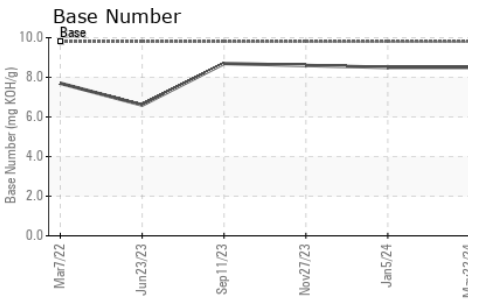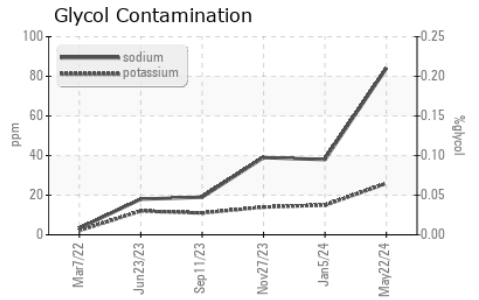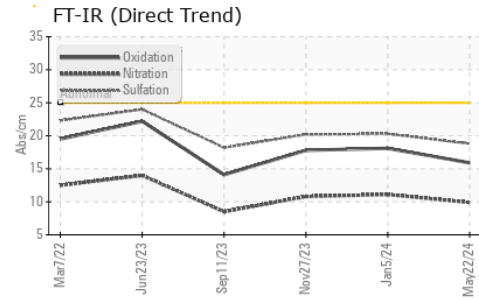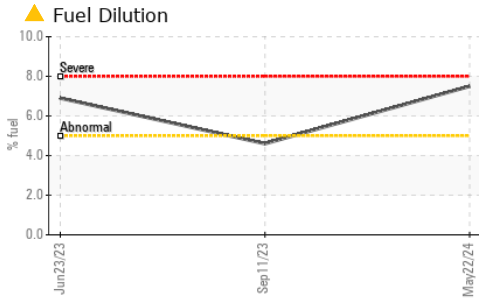

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | ▲ 12.4   | 13.2     |

## GRAPHS

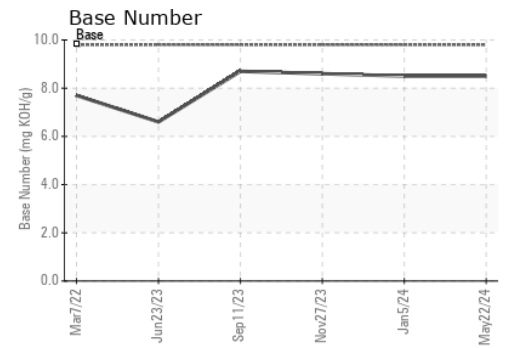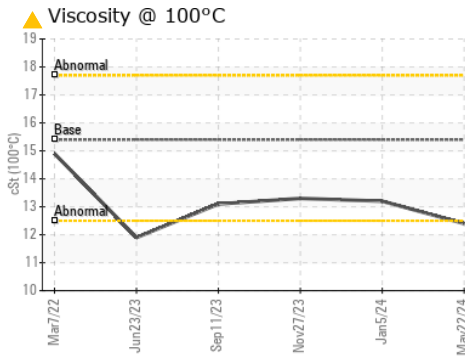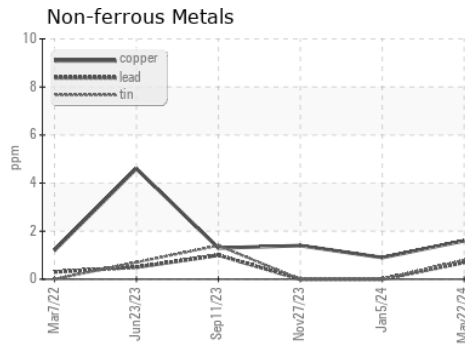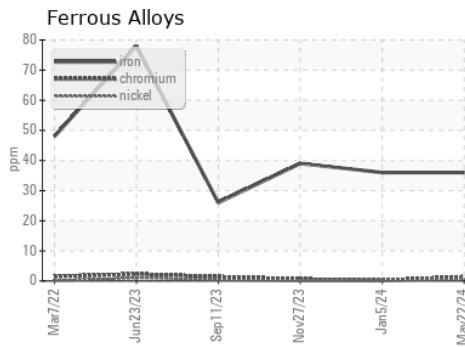

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116071 **Received** : 28 May 2024  
**Lab Number** : 06191878 **Tested** : 30 May 2024  
**Unique Number** : 11048630 **Diagnosed** : 30 May 2024 - Sean Felton  
**Test Package** : FLEET ( Additional Tests: FuelDilution, Glycol, PercentFuel )

**GFL Environmental - 463 - Cheboygan**  
 501 N. Western Ave  
 Cheboygan, MI  
 US 49721  
 Contact: Chris Gee  
 cgee@gflenv.com  
 T: (231)597-8553  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)