




# OIL ANALYSIS REPORT

## Sample Rating Trend

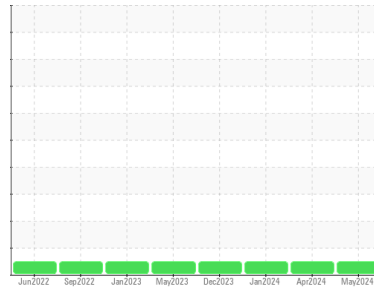

**NORMAL**



Machine Id

**352035**

Component

**Gasoline Engine**

Fluid

**PETRO CANADA DURON UHP 5W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0116016</b>  | GFL0116033  | GFL0092885  |
| Sample Date   | Client Info |             | <b>16 May 2024</b> | 04 Apr 2024 | 25 Jan 2024 |
| Machine Age   | mls         | Client Info | <b>204704</b>      | 201953      | 197637      |
| Oil Age       | mls         | Client Info | <b>186430</b>      | 186430      | 186430      |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >4.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >150 | <b>21</b>    | 14       | 14       |
| Chromium | ppm    | ASTM D5185m >20  | <b>2</b>     | 0        | 1        |
| Nickel   | ppm    | ASTM D5185m >5   | <b>1</b>     | 0        | <1       |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | <1       |
| Silver   | ppm    | ASTM D5185m >2   | <b>1</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >40  | <b>4</b>     | <1       | 3        |
| Lead     | ppm    | ASTM D5185m >50  | <b>&lt;1</b> | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >155 | <b>6</b>     | 3        | <1       |
| Tin      | ppm    | ASTM D5185m >10  | <b>&lt;1</b> | 0        | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | <1       |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>11</b>    | 11       | 15       |
| Barium     | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 64   | <b>67</b>    | 67       | 69       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | <1       |
| Magnesium  | ppm    | ASTM D5185m 1160 | <b>424</b>   | 499      | 435      |
| Calcium    | ppm    | ASTM D5185m 820  | <b>1055</b>  | 1143     | 979      |
| Phosphorus | ppm    | ASTM D5185m 1160 | <b>576</b>   | 709      | 662      |
| Zinc       | ppm    | ASTM D5185m 1260 | <b>700</b>   | 766      | 731      |
| Sulfur     | ppm    | ASTM D5185m 3000 | <b>1963</b>  | 2631     | 2168     |

## CONTAMINANTS

|           | method | limit/base       | current  | history1 | history2 |
|-----------|--------|------------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >30  | <b>8</b> | 6        | 10       |
| Sodium    | ppm    | ASTM D5185m >400 | <b>3</b> | <1       | 2        |
| Potassium | ppm    | ASTM D5185m >20  | <b>2</b> | 0        | 1        |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844     | <b>0.1</b>  | 0.1      | 0        |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>12.0</b> | 11.8     | 11.2     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>23.0</b> | 21.7     | 21.6     |


## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>17.3</b> | 14.9     | 15.5     |
| Base Number (BN) | mg KOH/g | ASTM D2896 11.0 | <b>3.3</b>  | 4.2      | 3.0      |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

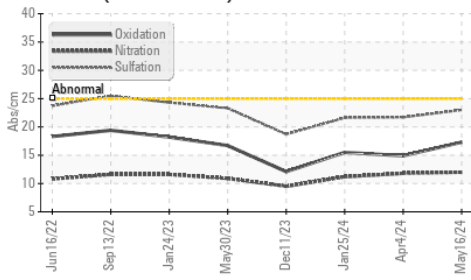

Base Number

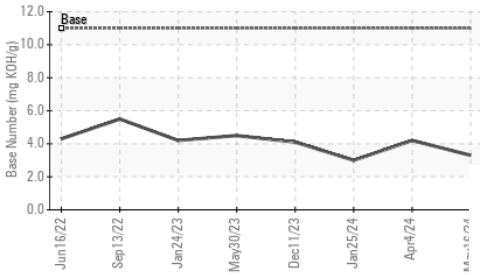

Viscosity @ 100°C

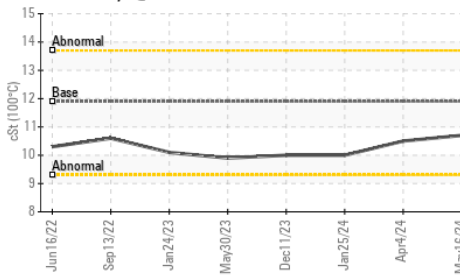


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 11.9    | 10.5     | 10.0     |

## GRAPHS


Ferrous Alloys

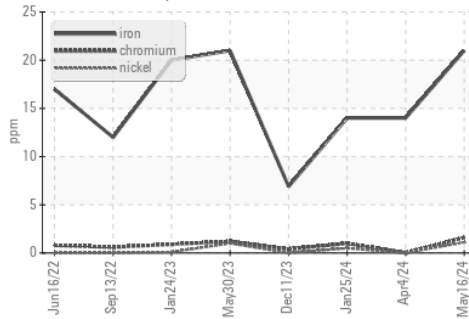


Non-ferrous Metals

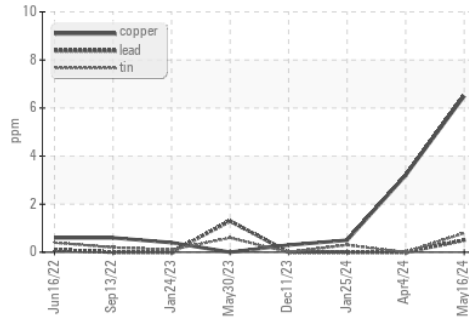

Viscosity @ 100°C

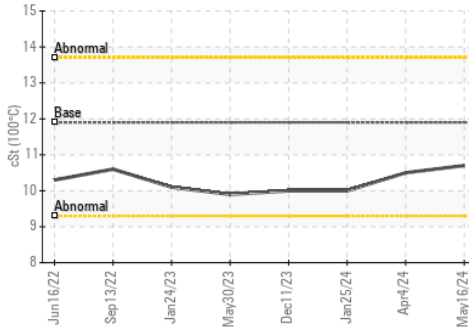

Base Number

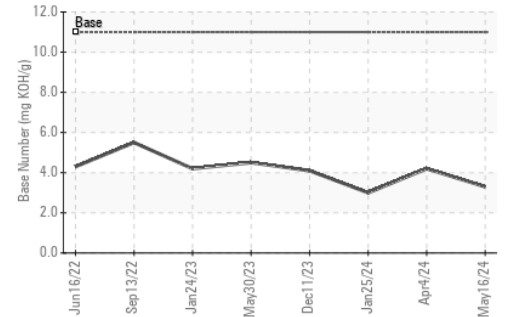

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116016  
**Lab Number** : 06191881  
**Unique Number** : 11048633  
**Test Package** : FLEET

**Received** : 28 May 2024  
**Tested** : 29 May 2024  
**Diagnosed** : 30 May 2024 - Sean Felton

**GFL Environmental - 641 - Alpena**  
 1241 KING SETTLEMENT RD  
 ALPENA, MI  
 US 49707

Contact: DYLAN TOLAN  
 dylan.tolan@gflenv.com  
 T: (989)854-7203

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)