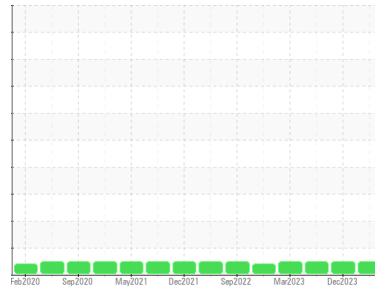


OIL ANALYSIS REPORT

Area
600HP
 Machine Id
217419 [600HP]
 Component
Diesel Engine
 Fluid
 DIESEL ENGINE OIL SAE 10W30 (38 QTS)

Sample Rating Trend



DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.
 Please specify the brand, type, and viscosity of the oil on your next sample.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0101227	PCA0101191	PCA0073139
Sample Date	Client Info			20 May 2024	21 Dec 2023	13 Jun 2023
Machine Age	mls Client Info			0	0	608708
Oil Age	mls Client Info			0	0	30000
Oil Changed	Client Info			Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	19	12	12
Chromium	ppm	ASTM D5185m	>20	2	<1	1
Nickel	ppm	ASTM D5185m	>2	1	0	0
Titanium	ppm	ASTM D5185m	>2	2	0	0
Silver	ppm	ASTM D5185m	>2	1	0	0
Aluminum	ppm	ASTM D5185m	>30	6	4	2
Lead	ppm	ASTM D5185m	>30	<1	0	0
Copper	ppm	ASTM D5185m	>30	9	3	3
Tin	ppm	ASTM D5185m	>15	2	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

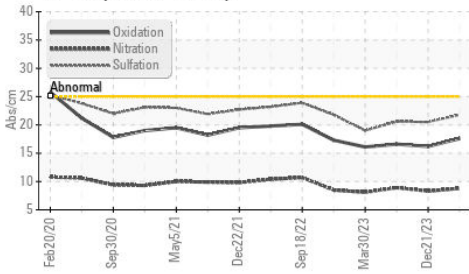
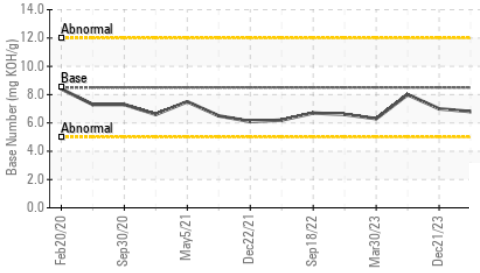
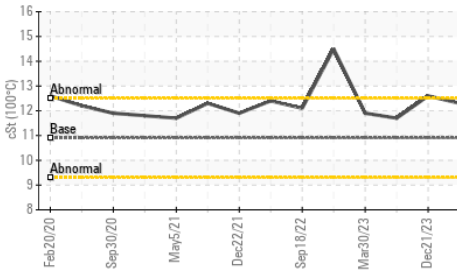
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	6	15	0
Barium	ppm	ASTM D5185m	10	1	0	0
Molybdenum	ppm	ASTM D5185m	100	64	61	63
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	450	991	914	1040
Calcium	ppm	ASTM D5185m	3000	1151	1043	1167
Phosphorus	ppm	ASTM D5185m	1150	1113	1029	1048
Zinc	ppm	ASTM D5185m	1350	1327	1270	1317
Sulfur	ppm	ASTM D5185m	4250	2920	2715	3408

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	5	4	3
Sodium	ppm	ASTM D5185m		0	1	<1
Potassium	ppm	ASTM D5185m	>20	4	0	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	0.7	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.8	8.3	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.8	20.5	20.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	16.2	16.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.8	7.0	8.0

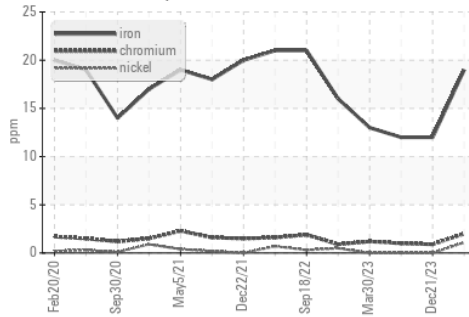
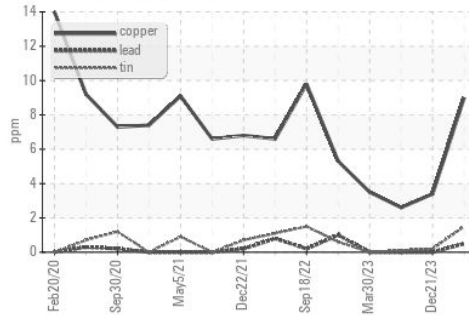
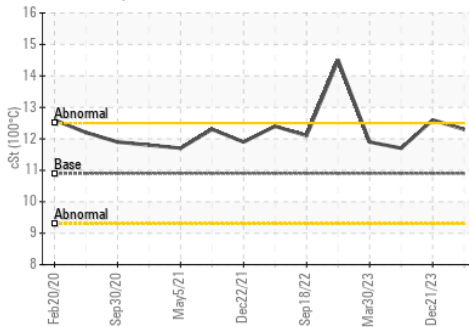
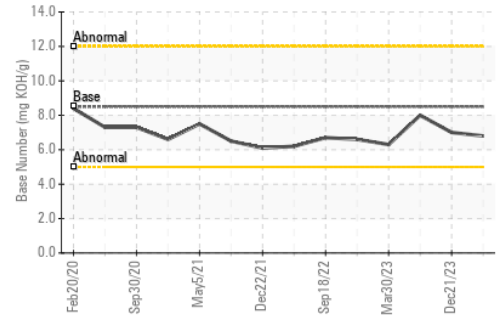
OIL ANALYSIS REPORT

FT-IR (Direct Trend)

Base Number

Viscosity @ 100°C


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	12.3	12.6	11.7

GRAPHS

Ferrous Alloys

Non-ferrous Metals

Viscosity @ 100°C

Base Number


Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0101227
Lab Number : **06192050**
Unique Number : 11048802
Test Package : FLEET

Received : 28 May 2024
Tested : 29 May 2024
Diagnosed : 29 May 2024 - Wes Davis

McLane Company - High Plains - 600HP
 1717 East Loop 289
 LUBBOCK, TX
 US 79403
 Contact: RITA GARCIA
 rita.garcia@mcclaneco.com
 T: (806)766-2902
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)