



# OIL ANALYSIS REPORT

Machine Id  
**714016**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## Sample Rating Trend



**DIRT**



## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### ▲ Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material. Tests indicate that there is no fuel present in the oil.

### ● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0116707</b>	---	---
Sample Date	Client Info		<b>23 May 2024</b>	---	---
Machine Age	mls	Client Info	<b>7828</b>	---	---
Oil Age	mls	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	<b>46</b>	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	---
Nickel	ppm	ASTM D5185m	>5	<b>6</b>	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---
Silver	ppm	ASTM D5185m	>2	<b>2</b>	---
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---
Copper	ppm	ASTM D5185m	>330	<b>176</b>	---
Tin	ppm	ASTM D5185m	>15	<b>3</b>	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>243</b>	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	---
Molybdenum	ppm	ASTM D5185m	60	<b>120</b>	---
Manganese	ppm	ASTM D5185m	0	<b>4</b>	---
Magnesium	ppm	ASTM D5185m	1010	<b>695</b>	---
Calcium	ppm	ASTM D5185m	1070	<b>1388</b>	---
Phosphorus	ppm	ASTM D5185m	1150	<b>752</b>	---
Zinc	ppm	ASTM D5185m	1270	<b>873</b>	---
Sulfur	ppm	ASTM D5185m	2060	<b>2462</b>	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>▲ 89</b>	---
Sodium	ppm	ASTM D5185m		<b>3</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>25</b>	---
Fuel	%	ASTM D3524	>3.0	<b>0.3</b>	---

## INFRA-RED






	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	<b>0.4</b>	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.5</b>	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.7</b>	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.8</b>	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.7</b>	---







# OIL ANALYSIS REPORT

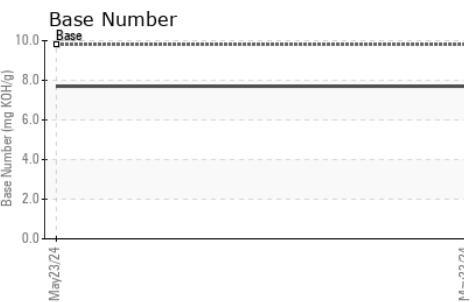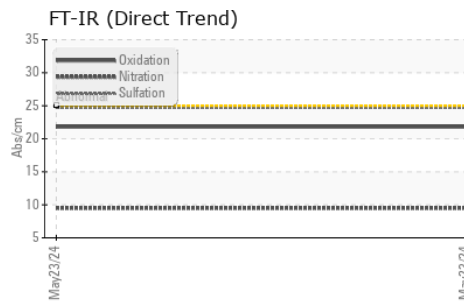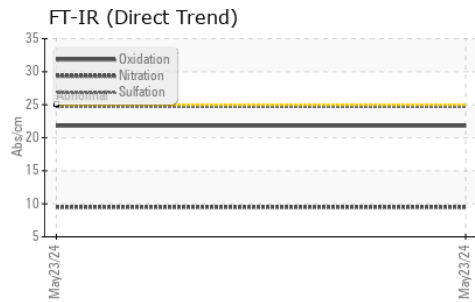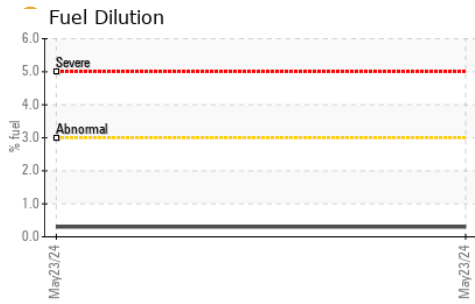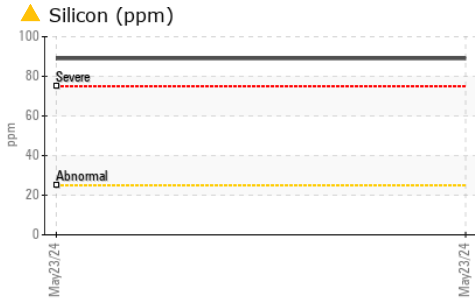

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	10.1	---

## GRAPHS

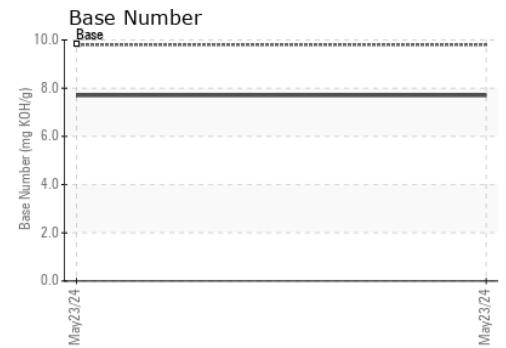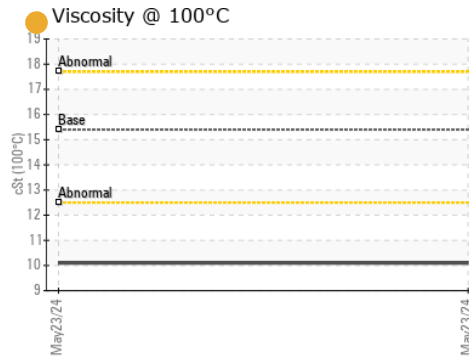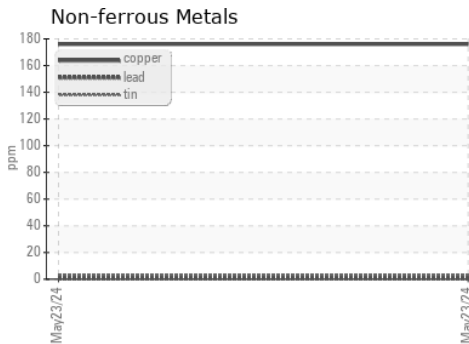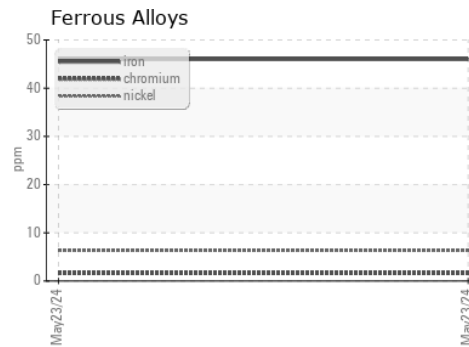

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116707  
**Lab Number** : 06192062  
**Unique Number** : 11048814  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**Received** : 28 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Sean Felton

**GFL Environmental - 419 - Metro Saginaw**  
 6950 N Michigan  
 Saginaw, MI  
 US 48604

Contact: Jeremy Hines  
 jhines@gflenv.com  
 T: (800)684-1277

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)