




OIL ANALYSIS REPORT

Sample Rating Trend

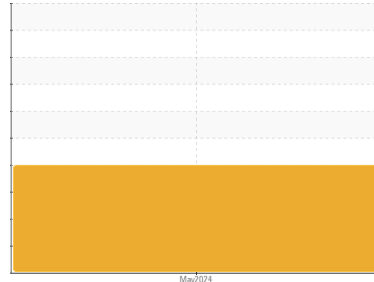

DIRT



Machine Id

427186

Component

1 Differential

Fluid

GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: 1st Axle / Pusher)

▲ Wear

Gear wear is indicated.

▲ Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number | Client Info | | | GFL0123560 | --- | --- |
| Sample Date | Client Info | | | 22 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 346360 | --- | --- |
| Oil Age | hrs | Client Info | | 346360 | --- | --- |
| Oil Changed | Client Info | | | Changed | --- | --- |
| Sample Status | | | | ABNORMAL | --- | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >.2 | NEG | --- | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >500 | ▲ 514 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | 5 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | ▲ 16 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25 | ● 13 | --- | --- |
| Lead | ppm | ASTM D5185m | >25 | 3 | --- | --- |
| Copper | ppm | ASTM D5185m | >100 | 28 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 19 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| Cadmium | ppm | ASTM D5185m | | <1 | --- | --- |





| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 400 | 203 | --- | --- |
| Barium | ppm | ASTM D5185m | 200 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 12 | 1 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 14 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 12 | 2 | --- | --- |
| Calcium | ppm | ASTM D5185m | 150 | 29 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1650 | 1371 | --- | --- |
| Zinc | ppm | ASTM D5185m | 125 | 60 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 22500 | 25011 | --- | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >75 | ▲ 129 | --- | --- |
| Sodium | ppm | ASTM D5185m | | 8 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 16 | --- | --- |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |






OIL ANALYSIS REPORT

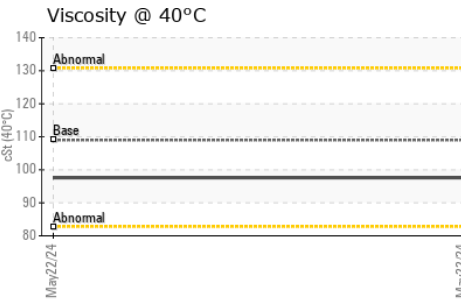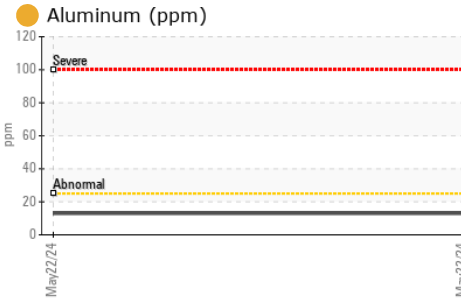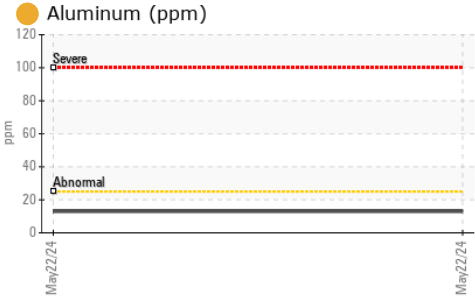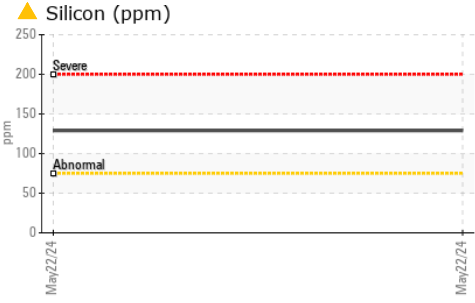

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|-----------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 109 | 97.6 | --- | --- |

| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
| Color | | | | | no image | no image |
| Bottom | | | | | no image | no image |

GRAPHS

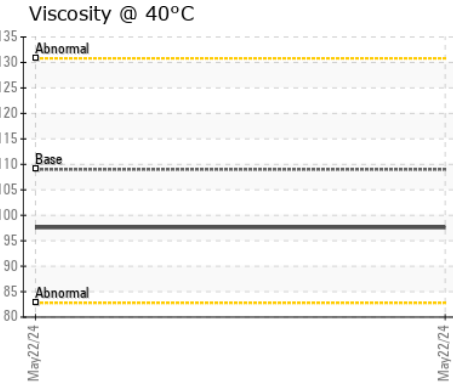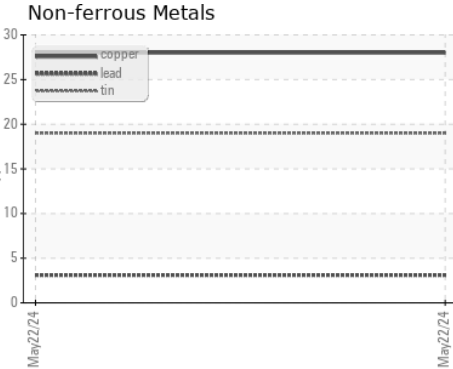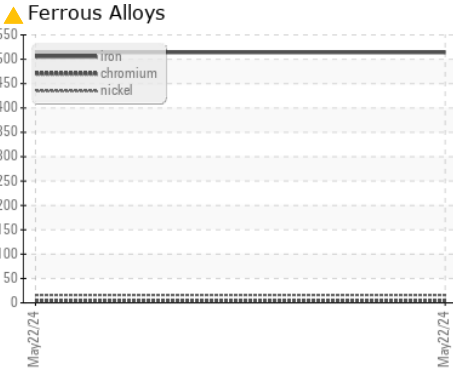

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0123560
Lab Number : **06192587**
Unique Number : 11049339
Test Package : FLEET

Received : 28 May 2024
Tested : 29 May 2024
Diagnosed : 30 May 2024 - Don Baldrige

GFL Environmental - 983 - Sugar Land Hauling
 16011 West Belfort Street
 Sugar Land, TX
 US 77498
 Contact: TECHNICIAN ACCOUNT
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: