


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / RIVER VALLEY BACKBONE**  
 Machine Id  
**WL088**  
 Component  
**Transmission (Manual)**  
 Fluid  
**MOBIL MOBILTRANS HD 30 (--- GAL)**

### Sample Rating Trend

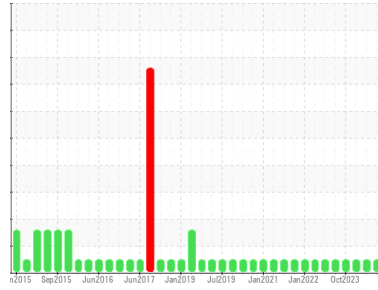

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0108600</b>	PCA0069717	PCA0084830
Sample Date	Client Info		<b>23 May 2024</b>	30 Jan 2024	10 Nov 2023
Machine Age	hrs	Client Info	<b>43799</b>	43499	6716
Oil Age	hrs	Client Info	<b>900</b>	1200	900
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>12</b>	15	14
Chromium	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >7	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	3	2
Lead	ppm	ASTM D5185m >45	<b>1</b>	2	<1
Copper	ppm	ASTM D5185m >225	<b>7</b>	11	7
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	<1	1
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	3	2
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>17</b>	16	24
Calcium	ppm	ASTM D5185m	<b>3013</b>	2904	2952
Phosphorus	ppm	ASTM D5185m	<b>935</b>	957	959
Zinc	ppm	ASTM D5185m	<b>1113</b>	1141	1154
Sulfur	ppm	ASTM D5185m	<b>4066</b>	3569	4011


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	<b>6</b>	8	9
Sodium	ppm	ASTM D5185m	<b>1</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	1	2

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








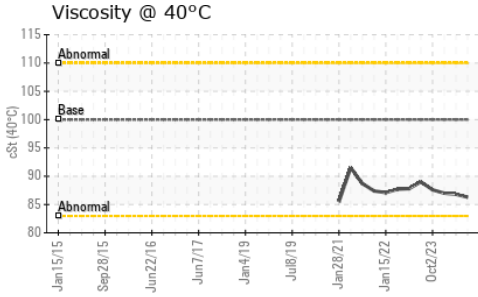


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	100	<b>86.3</b>	86.8	87.0

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

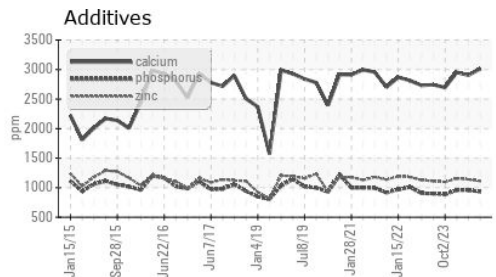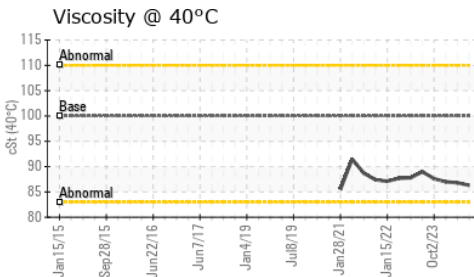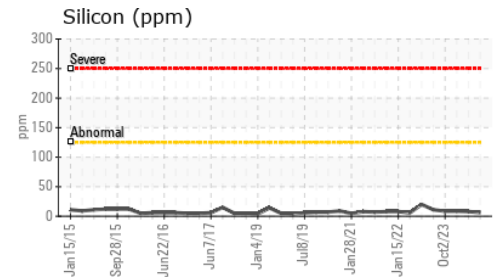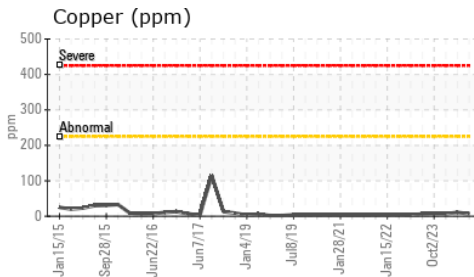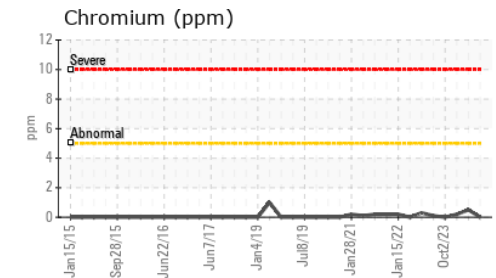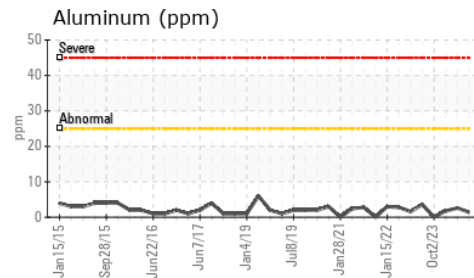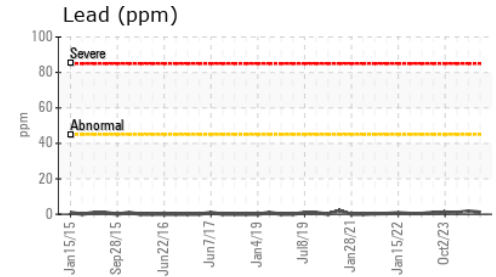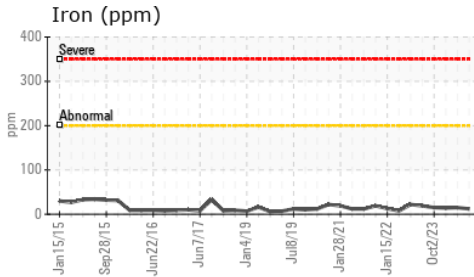

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108600  
**Lab Number** : **06193166**  
**Unique Number** : 11049918  
**Test Package** : MOB 1

**Received** : 28 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Wes Davis

**Kemp Quarries - River Valley - Backbone**  
 5600 S Hwy 253  
 Huntington, AR  
 US 72940  
 Contact:  
 backbone@rivervalleyquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: