




# OIL ANALYSIS REPORT

Sample Rating Trend

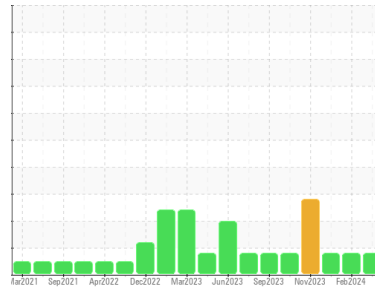

FUEL



Machine Id  
**827034-755**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (22 QTS)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0103060</b>	GFL0110281	GFL0102764
Sample Date	Client Info	<b>23 May 2024</b>	29 Feb 2024	15 Dec 2023
Machine Age	hrs	<b>16803</b>	16187	15714
Oil Age	hrs	<b>600</b>	582	602
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>MARGINAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>80	<b>38</b>	32	51
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	2	3
Lead	ppm	ASTM D5185m	>30	<b>2</b>	<1	2
Copper	ppm	ASTM D5185m	>150	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	<b>3</b>	2	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	9
Molybdenum	ppm	ASTM D5185m	60	<b>65</b>	57	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1030</b>	849	869
Calcium	ppm	ASTM D5185m	1070	<b>1258</b>	972	1045
Phosphorus	ppm	ASTM D5185m	1150	<b>1132</b>	952	972
Zinc	ppm	ASTM D5185m	1270	<b>1437</b>	1143	1154
Sulfur	ppm	ASTM D5185m	2060	<b>3604</b>	2852	2729

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	4	6
Sodium	ppm	ASTM D5185m		<b>19</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	4
Fuel	%	ASTM D3524	>5	<b>▲ 3.4</b>	▲ 5.8	▲ 5.6

## INFRA-RED





method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.6	0.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>13.3</b>	13.3	15.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.9</b>	24.4	26.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.6</b>	22.8	29.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>5.3</b>	4.6	4.6







# OIL ANALYSIS REPORT

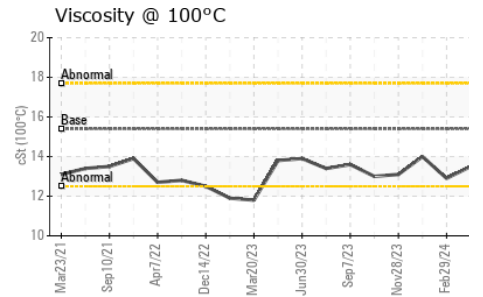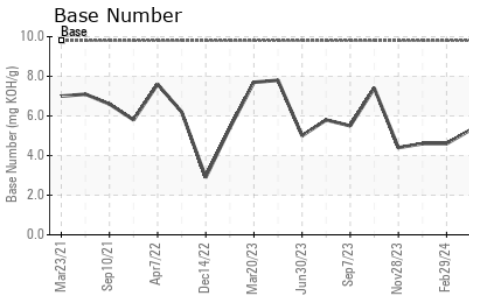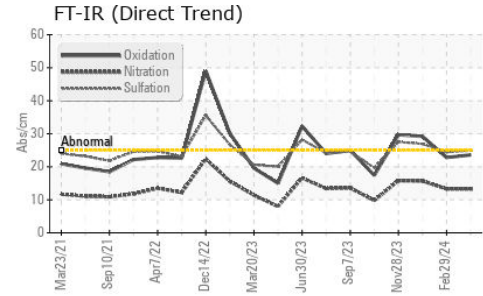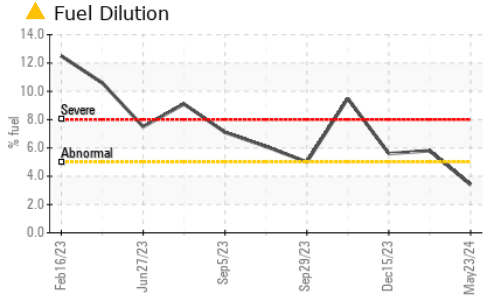

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	12.9

## GRAPHS

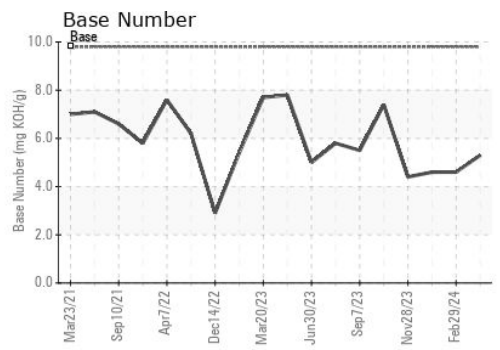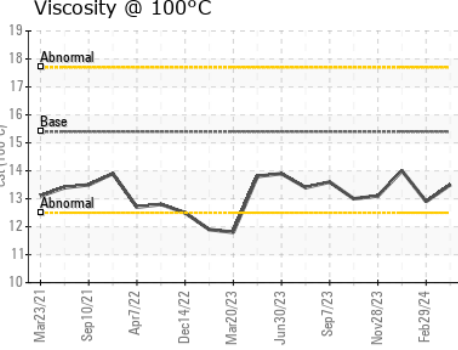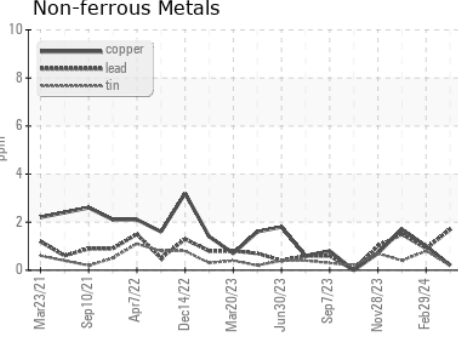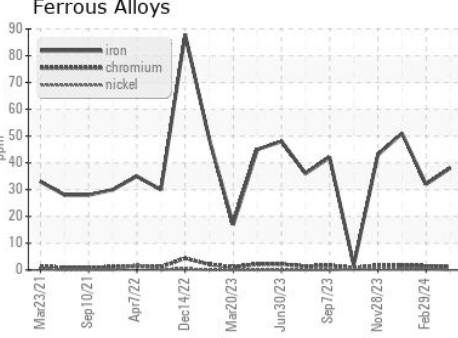

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103060      **Received** : 28 May 2024  
**Lab Number** : 06193257      **Tested** : 30 May 2024  
**Unique Number** : 11050009      **Diagnosed** : 30 May 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 622 - Traverse City Hauling**  
 160 Hughes Dr  
 Traverse City, MI  
 US 49686  
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)