




OIL ANALYSIS REPORT

Sample Rating Trend

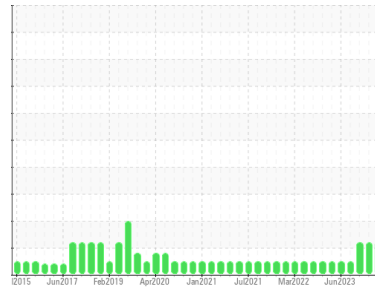

GLYCOL



Area
(71052P)
Machine Id
10541
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0113941	GFL0113935	GFL0093748
Sample Date	Client Info		22 May 2024	20 May 2024	02 Feb 2024
Machine Age	hrs	Client Info	15079	15003	14412
Oil Age	hrs	Client Info	0	0	13537
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	43	39	22
Chromium	ppm	ASTM D5185m >5	2	2	<1
Nickel	ppm	ASTM D5185m >4	0	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	0
Silver	ppm	ASTM D5185m >2	<1	<1	<1
Aluminum	ppm	ASTM D5185m >15	3	3	3
Lead	ppm	ASTM D5185m >25	3	3	<1
Copper	ppm	ASTM D5185m >100	<1	1	1
Tin	ppm	ASTM D5185m >4	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	8	10	12
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	97	93	69
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	1076	965	959
Calcium	ppm	ASTM D5185m 1070	1241	1116	1010
Phosphorus	ppm	ASTM D5185m 1150	1155	997	1100
Zinc	ppm	ASTM D5185m 1270	1484	1295	1287
Sulfur	ppm	ASTM D5185m 2060	4074	3341	3073

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	21	21	9
Sodium	ppm	ASTM D5185m	826	812	235
Potassium	ppm	ASTM D5185m >20	10	11	4
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	1.2	1	0.8
Nitration	Abs/cm	*ASTM D7624 >20	11.8	11.0	9.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.8	22.5	20.9


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.1	17.3	15.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.2	8.7	8.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

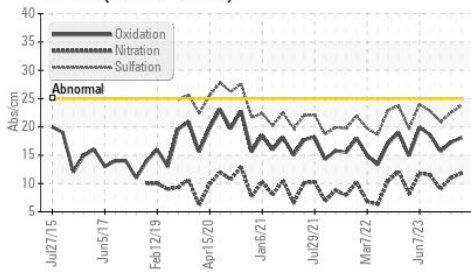


Glycol Contamination

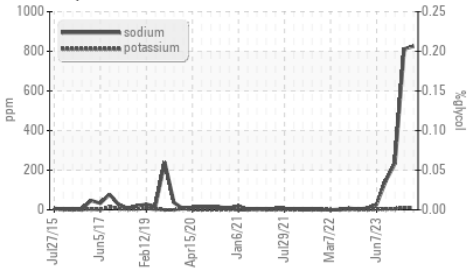

Viscosity @ 100°C

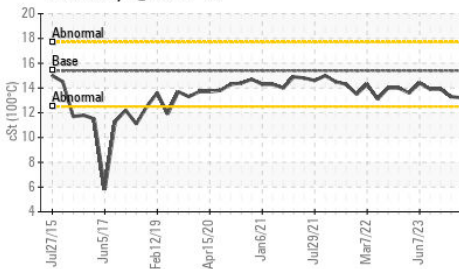

Glycol Contamination

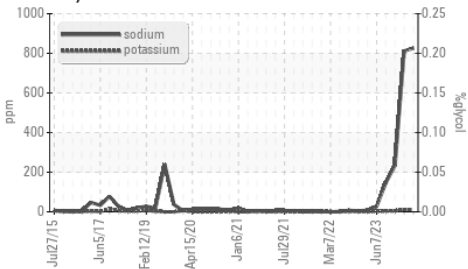


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	13.3

GRAPHS


Ferrous Alloys

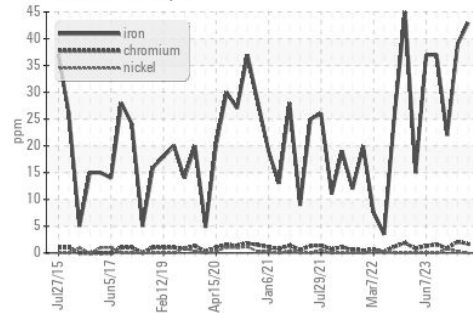


Non-ferrous Metals

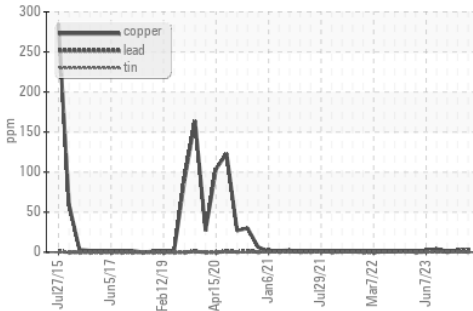

Viscosity @ 100°C

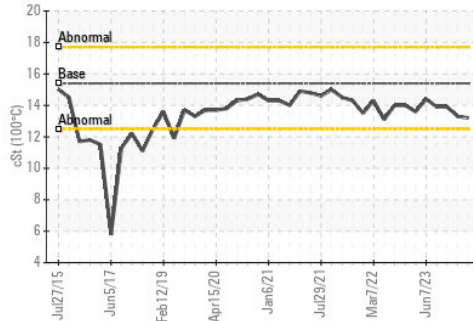

Base Number

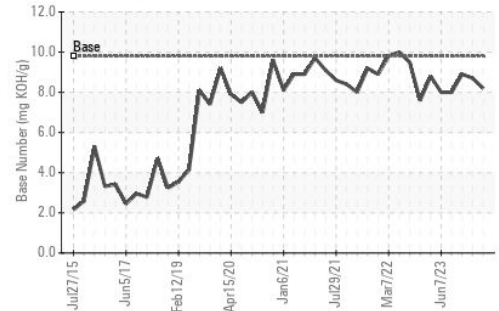

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0113941

Lab Number : 06193258

Unique Number : 11050010

Test Package : FLEET (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 28 May 2024

Tested : 30 May 2024

Diagnosed : 30 May 2024 - Sean Felton

GFL Environmental - 029 - Wytheville

2390 North 4th Street

Wytheville, VA

US 24382

Contact: CHARLES CORVIN

charles.corvin@gflenv.com; canastasio@wearcheckusa.com

T: (276)223-4476

F: (276)223-1283