




# OIL ANALYSIS REPORT

Sample Rating Trend

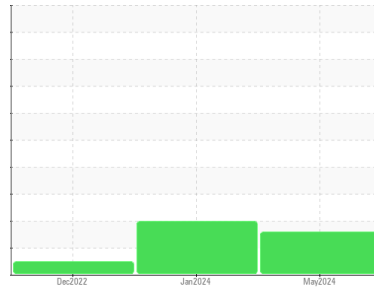

DEGRADATION



Machine Id

**252006**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN level is low. Confirm oil type.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0110206</b>	GFL0110171	GFL0060438	
Sample Date	Client Info	<b>24 May 2024</b>	08 Jan 2024	13 Dec 2022	
Machine Age	mls	Client Info	<b>209572</b>	217197	182393
Oil Age	mls	Client Info	<b>5000</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>ABNORMAL</b>	ATTENTION	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	<b>33</b>	23	67
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	3
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	3	10
Lead	ppm	ASTM D5185m	>40	<b>0</b>	2	0
Copper	ppm	ASTM D5185m	>330	<b>7</b>	1	11
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	<b>30</b>	20	18
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>65</b>	46	77
Manganese	ppm	ASTM D5185m	0	<b>2</b>	<1	1
Magnesium	ppm	ASTM D5185m	1010	<b>778</b>	642	700
Calcium	ppm	ASTM D5185m	1070	<b>1095</b>	762	1134
Phosphorus	ppm	ASTM D5185m	1150	<b>781</b>	607	801
Zinc	ppm	ASTM D5185m	1270	<b>990</b>	665	991
Sulfur	ppm	ASTM D5185m	2060	<b>3196</b>	2249	3170

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	<b>16</b>	20	21
Sodium	ppm	ASTM D5185m		<b>2</b>	0	12
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	2
Fuel	%	ASTM D3524	>5	<b>&lt;1.0</b>	1.1	<1.0

## INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>18.9</b>	11.0	20.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>31.1</b>	25.8	32.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>33.3</b>	19.7	36.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>▲ 2.7</b>	3.2	6.5







# OIL ANALYSIS REPORT

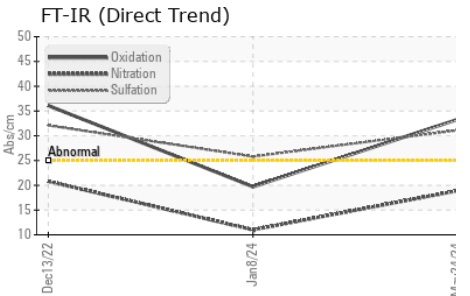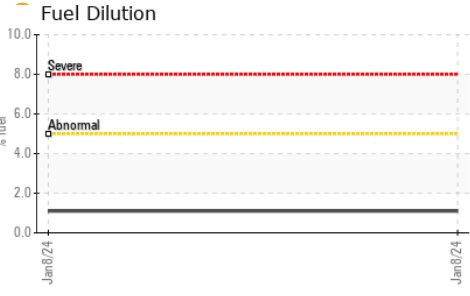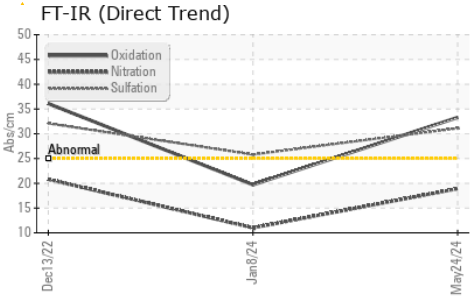

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.4	10.8	14.2

## GRAPHS

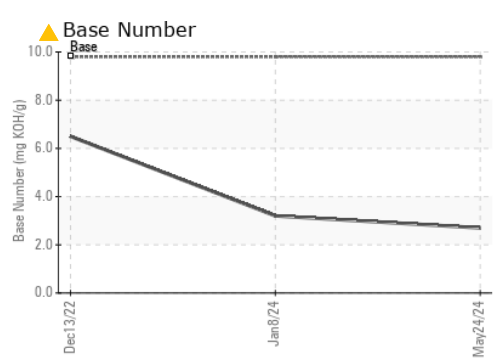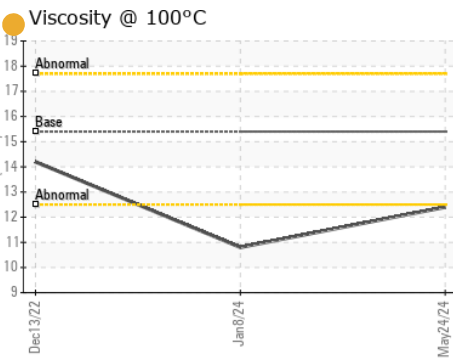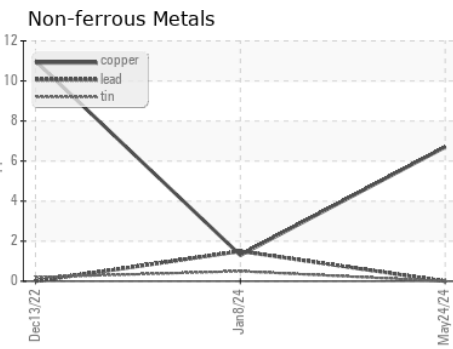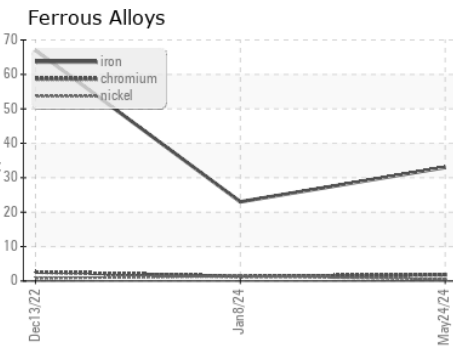

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110206      **Received** : 28 May 2024  
**Lab Number** : 06193332      **Tested** : 30 May 2024  
**Unique Number** : 11050084      **Diagnosed** : 30 May 2024 - Sean Felton  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 660 - Lynchburg Hauling**  
 2410 Mayflower Drive  
 Lynchburg, VA  
 US 24501  
 Contact: Delbert Beasley  
 dbeasley@countyrecycling.net  
 T: (434)665-5998  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)